

Your Global Automation Partner

TURCK

FEN20-4IOL

IO-Link Master Module

Instructions for Use



Table of Contents

1	About These Instructions	7
1.1	Target groups.....	7
1.2	Explanation of symbols used	7
1.3	Additional documents.....	7
1.4	Feedback about these instructions.....	7
2	Notes on the Product	8
2.1	Product identification.....	8
2.2	Scope of delivery	8
2.3	Legal requirements	8
2.4	Manufacturer and service	8
3	For Your Safety.....	9
3.1	Intended use.....	9
3.2	General safety notes	9
4	System Description IO-Link	10
4.1	Features.....	10
4.2	System architecture	10
4.3	Operating principle.....	11
4.4	Operating modes.....	11
4.4.1	IO-Link mode	12
4.4.2	Standard I/O mode (SIO mode)	14
5	Product Description	15
5.1	Device overview	15
5.2	Properties and features.....	15
5.3	Operating principle.....	16
5.4	Functions and operating modes	16
5.4.1	Multiprotocol technology.....	16
5.4.2	IO-Link channels.....	16
6	Mounting.....	17
6.1	Mounting the device onto a mounting plate.....	17
6.2	Mounting the device onto a DIN rail (TS35)	17
6.3	Grounding the device.....	18
6.3.1	Fieldbus and I/O level shielding	18
7	Connecting	19
7.1	Connecting the device to Ethernet	19
7.2	Connecting the supply voltage	19
7.3	Connecting IO-Link devices and digital sensors and actuators	20
8	Commissioning	21
8.1	Setting the IP address.....	21
8.2	ARGEE/FLC	23
8.3	Commissioning an IO-Link device with IO-Link V1.0.....	23
8.4	Commissioning an IO-Link device with IO-Link V1.1.....	24
8.5	Read in connected IO-Link devices: topology scan in the DTM	26
8.6	Commissioning the Device in PROFINET	27

8.6.1	PROFINET IO device model.....	27
8.6.2	Device model – FEN20-4IOL.....	28
8.6.3	Address setting in PROFINET	28
8.6.4	FSU – Fast Start-Up (prioritized startup).....	29
8.6.5	MRP (Media Redundancy Protocol).....	29
8.6.6	User data for acyclic services	30
8.6.7	The IO-Link function block IOL_CALL.....	30
8.7	Connecting the device to a Siemens PLC in PROFINET	35
8.7.1	Installing the GSDML file	36
8.7.2	Connecting the devices to the PLC	37
8.7.3	Assigning the PROFINET device name	38
8.7.4	Setting the IP address in TIA Portal	39
8.7.5	Configuring device functions.....	40
8.7.6	Going online with the PLC.....	43
8.7.7	PROFINET – mapping	43
8.7.8	Use the IO_LINK_DEVICE function block in TIA Portal.....	44
8.8	Commissioning the Device in Modbus TCP.....	51
8.8.1	Implemented Modbus functions	51
8.8.2	Modbus registers	51
8.8.3	Data width	54
8.8.4	Register mapping.....	55
8.8.5	Error Behavior (watchdog).....	56
8.9	Commissioning the device in EtherNet/IP.....	56
8.9.1	Common EtherNet/IP features.....	56
8.9.2	EDS files and catalog files.....	56
8.9.3	Device Level Ring (DLR).....	57
8.9.4	Diagnostic messages via process data	57
8.9.5	EtherNet/IP standard classes	57
8.9.6	VSC-Vendor Specific Classes	77
8.10	Connecting the Devices to a Rockwell PLC with EtherNet/IP	88
8.10.1	Adding the devices from the catalog files to the new project	89
8.10.2	Configuring the device in RS Logix	91
8.10.3	Parameterizing the device.....	92
8.10.4	Going online with the PLC.....	93
8.10.5	Reading process data	95
9	Parameterizing and Configuring.....	96
9.1	Parameters.....	96
9.1.1	Adapting process data mapping.....	101
9.1.2	PROFINET parameters	102
9.2	IO-Link functions for acyclic communication	103
9.2.1	Port functions for Port 0 (IO-Link Master).....	103
10	Operating	108
10.1	Evaluating process input data	108
10.2	Writing process output data	110
10.3	LED displays.....	111
10.4	Software diagnostic messages	111
10.4.1	Status- and control word.....	112
10.4.2	Diagnostic telegram.....	113
10.4.3	PROFINET diagnostics	115
10.5	Using the data storage mode.....	116
10.5.1	Parameter “data storage mode” = activated	116
10.5.2	Parameter “data storage mode” = read in	118

10.5.3	Parameter "data storage mode" = overwrite.....	118
10.5.4	Parameter "data storage mode" = deactivated, clear.....	118
11	Troubleshooting	119
11.1	Eliminate parameterization errors.....	119
12	Maintenance.....	120
12.1	Carry out firmware update via FDT/DTM.....	120
13	Repair	125
13.1	Returning devices.....	125
14	Disposal	125
15	Technical data	126

1 About These Instructions

These operating instructions describe the structure, functions and the use of the product and will help you to operate the product as intended. Read these instructions carefully before using the product. This is to avoid possible damage to persons, property or the device. Retain the instructions for future use during the service life of the product. If the product is passed on, pass on these instructions as well.

1.1 Target groups

These instructions are aimed at qualified personal and must be carefully read by anyone mounting, commissioning, operating, maintaining, dismantling or disposing of the device.

1.2 Explanation of symbols used

The following symbols are used in these instructions:



DANGER

DANGER indicates a dangerous situation with high risk of death or severe injury if not avoided.



WARNING

WARNING indicates a dangerous situation with medium risk of death or severe injury if not avoided.



CAUTION

CAUTION indicates a dangerous situation of medium risk which may result in minor or moderate injury if not avoided.



NOTICE

NOTICE indicates a situation which may lead to property damage if not avoided.



NOTE

NOTE indicates tips, recommendations and useful information on specific actions and facts. The notes simplify your work and help you to avoid additional work.



CALL TO ACTION

This symbol denotes actions that the user must carry out.



RESULTS OF ACTION

This symbol denotes relevant results of actions.

1.3 Additional documents

The following additional documents are available online at www.turck.com:

- Data sheet
- EU Declaration of Conformity
- Commissioning manual IO-Link devices

1.4 Feedback about these instructions

We make every effort to ensure that these instructions are as informative and as clear as possible. If you have any suggestions for improving the design or if some information is missing in the document, please send your suggestions to techdoc@turck.com.

2 Notes on the Product

2.1 Product identification

These instructions apply for the following IO-Link master module:

- FEN20-4IOL

2.2 Scope of delivery

- FEN20-4IOL

2.3 Legal requirements

The device falls under the following EU directives:

- 2014/30/EU (electromagnetic compatibility)
- 2011/65/EU (RoHS Directive)

2.4 Manufacturer and service

Hans Turck GmbH & Co. KG
Witzlebenstraße 7
45472 Mülheim an der Ruhr
Germany

Turck supports you with your projects, from initial analysis to the commissioning of your application. The Turck product database contains software tools for programming, configuration or commissioning, data sheets and CAD files in numerous export formats. You can access the product database at the following address: www.turck.de/products

For further inquiries in Germany contact the Sales and Service Team on:

- Sales: +49 208 4952-380
- Technology: +49 208 4952-390

Outside Germany, please contact your local Turck representative.

3 For Your Safety

The product is designed according to state-of-the-art technology. However, residual risks still exist. Observe the following warnings and safety notices to prevent damage to persons and property. Turck accepts no liability for damage caused by failure to observe these warning and safety notices.

3.1 Intended use

These devices are designed solely for use in industrial areas.

The multiprotocol I/O module FEN20-4IOL is an IO-Link master according to IO-Link specification V1.1 and can be operated in the three Ethernet protocols PROFINET, Ethernet/IP and Modbus TCP. The module detects the bus protocol automatically during the start-up.

The IO-Link master module FEN20-4IOL has four IO-Link channels. Up to four IO-Link sensors or IO hubs with IO-Link can be connected to the ten screw terminals. When using I/O hubs, it is possible to connect up to 64 digital sensors or actuators per device. Additionally, the four IO-Link channels can also be used to connect up to four digital sensors or actuators as universal digital DXP channels.

The devices may only be used as described in these instructions. Any other use is not in accordance with the intended use. Turck accepts no liability for any resulting damage.

3.2 General safety notes

- The device may only be assembled, installed, operated, parameterized and maintained by professionally-trained personnel.
- The device may only be used in accordance with applicable national and international regulations, standards and laws.
- The device only meets the EMC requirements for industrial areas and is not suitable for use in residential areas.
- Change the default password of the integrated web server after the first login. Turck recommends using a secure password.

4 System Description IO-Link

IO-Link is a fieldbus independent communication interface for sensors and actuators. Signals and energy can be exchanged between any networks, fieldbuses and backplane buses via a digital, serial point-to-point connection.

Each IO-Link system consists of an IO-Link master and an IO-Link device (e.g. sensor, I/O hub, valve block). An IO-Link master is provided with at least one IO-Link port (channel). One IO-Link device can be connected to each port. The system components are interconnected according to the port specification via unshielded 3-wire or 5-wire standard cables.

The IO-Link technology is described in the "IO-Link Interface and System Specification" and IEC 61131-9. IO-Link capable devices comply either with specification V1.0 or specification V1.1.

The properties, functions and parameters of the IO-Link device are represented in an electronic device description (IODD). The IODDs for Turck devices can be downloaded via the Turck Software Manager and can also be obtained free of charge from www.turck.com. The IODDs of all devices have the same structure and contain the following information for system integration

- Communication properties
- Device parameters with value range and default value
- Identification, process and diagnostic data
- Device data
- Text description
- Picture of the device
- Logo of the manufacturer

The structure of the IODD is defined by the IO-Link specification and is the same for all IO-Link devices. The IODD is based on indexes. The communication properties, device parameters, identification, process, diagnostic and device data are assigned to fixed indexes in the IODD, via which the parameters can be controlled. Some indexes are further divided by sub indexes.

4.1 Features

- Point-to-point connection (max. cable length: 20 m)
- Unshielded 3-wire or 5-wire standard cables
- Cyclical process data transmission
- Acyclical data transmission, e.g. device data and events
- Communication between IO-Link master and IO-Link device possible in three transmission rates
- Parallel exchange of device data without influencing the process data
- Communication via 24 V pulse modulation, standard UART protocol

4.2 System architecture

At least one IO-Link master and one IO-Link device (e.g. sensor or actuator) are required for IO-Link communication. IO-Link master and IO-Link device are interconnected via an unshielded 3-wire or 5-wire standard cable. The setting can be carried out with a configuration tool or via the fieldbus level.

The IO-Link master establishes the connection between IO-Link device and the higher-level control system. An IO-Link master can have several IO-Link ports. Only one IO-Link device can be connected to each port.

IO-Link hubs also make it possible to integrate devices without an IO-Link output in automation systems via IO-Link.

Standard tools and functions are provided for the integration, commissioning and configuration of the IO-Link communication.

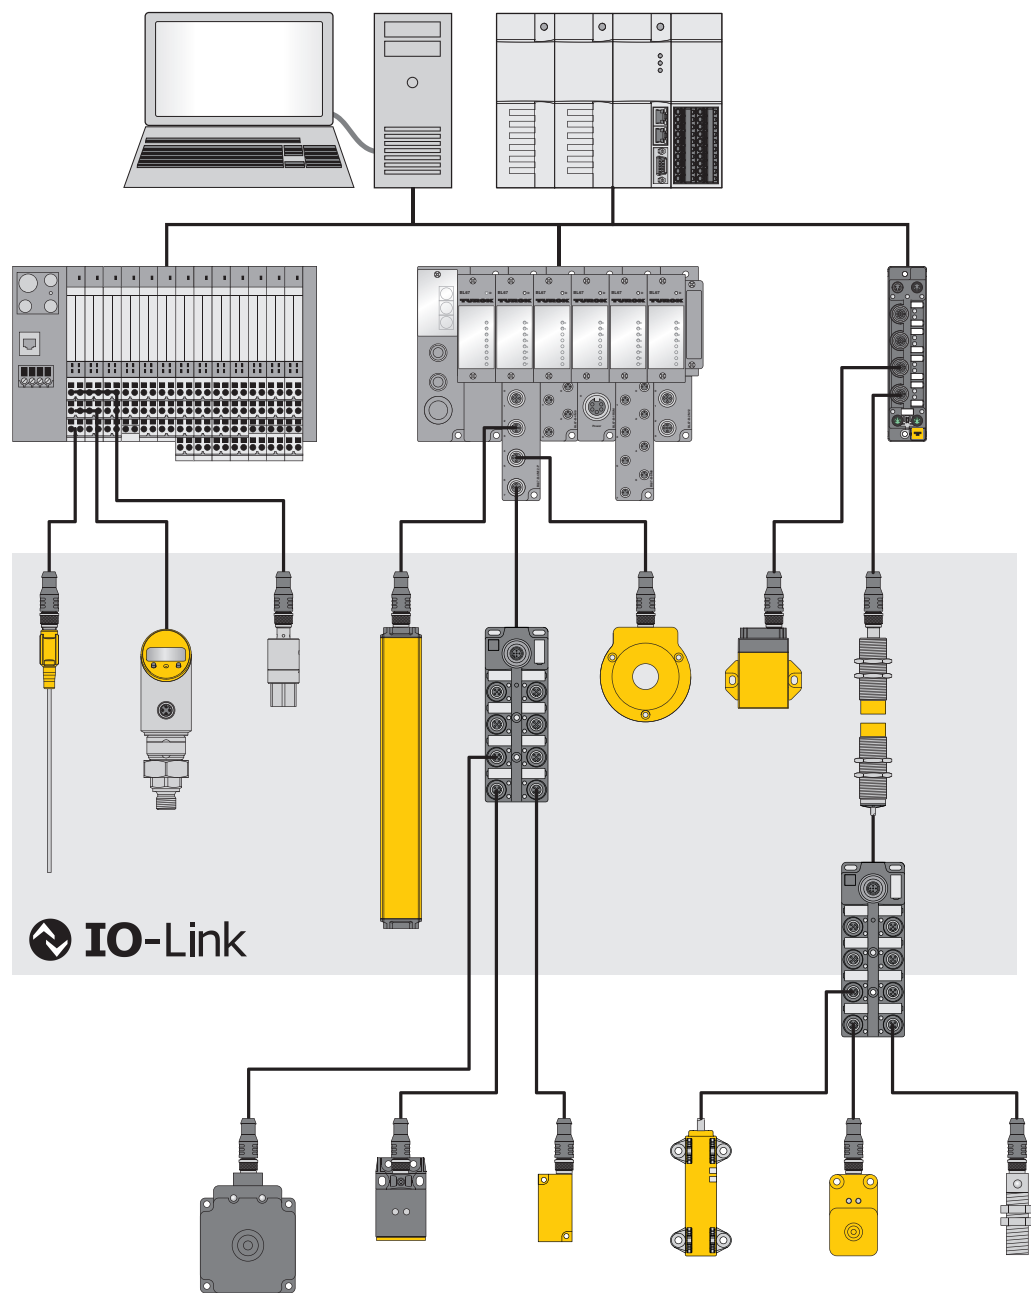


Fig. 1: IO-Link system overview

4.3 Operating principle

IO-Link is a digital point-to-point connection between an IO-Link master and an IO-Link device. Process data and other information such as parameters and diagnostic messages are transferred with a 24 V pulse modulation via a combined switching status and data channel (C/Q).

IO-Link communication is independent of the fieldbus used.

4.4 Operating modes

The operating mode can be set separately at any port of the IO-Link master.

Two operating modes are available for the IO-Link master:

- IO-Link mode: IO-Link communication possible
- Standard I/O mode (SIO): digital I/O communication

IO-Link communication is implemented via the switching and communication cable (C/Q).

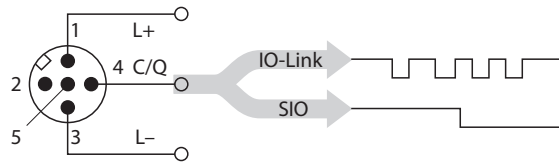


Fig. 2: IO-Link communication via C/Q

During initialization the ports of the IO-Link master behave like a normal digital input. The IO-Link devices are operated in IO-Link mode. A command of the higher-level IO-Link master establishes IO-Link communication in IO-Link mode. This command is called the “Wake-up request”.

4.4.1 IO-Link mode

In IO-Link mode communication takes place between an IO-Link master and an IO-Link device. Communication always starts from the IO-Link master.

Transmission speed between IO-Link master and IO-Link device

Three transmission rates are defined in the IO-Link specification:

- 4,8 kBaud
- 38,4 kBaud
- 230,4 kBaud

Each device supports only one transmission rate, an IO-Link master supports all transmission rates. The transfer time of the cyclical process data is determined by the telegram length as well as the delay times in the device and the master. With a transmission rate of 38.4 kBaud and a telegram length of 2 byte the transmission time is typically 2.3 ms.

Response times

The response time of the IO-Link system provides information on the frequency and speed of the data transmission between IO-Link master and IO-Link device. This response time depends on the following factors:

- Minimum cycle time: Intervals defined in the IODD in which the IO-Link master addresses the IO-Link device. Different minimum cycle times can be defined for different devices.
- Internal processing time of the IO-Link master and the IO-Link device

Cyclical and Acyclical Communication

The data exchanged between IO-Link master and the IO-Link device can be divided into cyclical process data and acyclical data. Process data and value states are transferred cyclically. Acyclical data is transferred separately to cyclic process data. Acyclical data includes device data, parameter functions and events such as diagnostic information, which is only transferred on request. The two communication types are independent of each other and do not interact.

Cyclical communication	
Process data	Value status (port qualifier)
<ul style="list-style-type: none"> ■ 0...32 bytes of process data possible per device (each input and output) ■ Process data size determined by the device 	<ul style="list-style-type: none"> ■ The Port Qualifier indicates whether the process data is valid or not.

Acylical communication	
Device data	Value status (port qualifier)
<ul style="list-style-type: none"> ■ Parameters, identification data or diagnostic information ■ Data exchange on request of the IO-Link master ■ Device data can be written to the device or read from the device. 	<ul style="list-style-type: none"> ■ Device indicates event to master: Error messages and warnings ■ Master indicates event to device: e.g. cable break or communication abort

Combining IO-Link devices with different specifications

Only devices of specification V1.0 can be operated on IO-Link masters of specification V1.0. Devices of specification V1.0 and V1.1 can be operated on IO-Link masters of specification V1.1.

	IO-Link device V1.0	IO-Link device V1.1
IO-Link master V1.0	x	-
IO-Link master V1.1	x	x

Data storage mode



NOTE

Data storage mode is only available for devices complying with the IO-Link specification V1.1.

Data storage mode makes it possible to replace IO-Link devices without the need for a reconfiguration.

The IO-Link master or the IO-Link device save the device parameters set in the previous configuration. In data storage mode the parameter data memories of IO-Link master and IO-Link device are synchronized. If data storage mode is activated in the IO-Link master, the master writes the stored device parameters to the new device after a device is replaced. The application can be restarted without having to perform a new configuration.

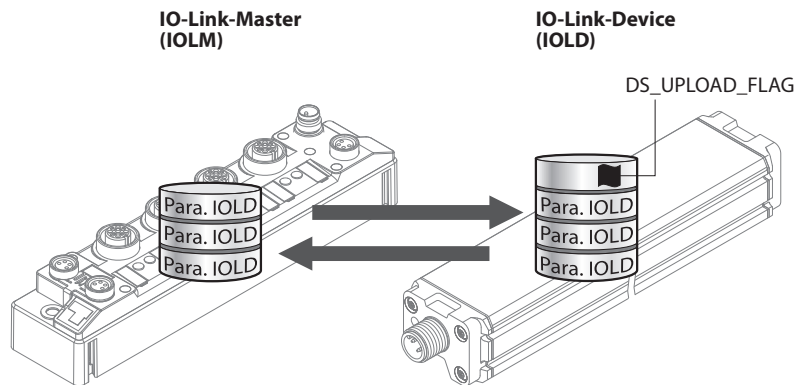


Fig. 3: Data storage mode – general principle, Para. IOLD = parameters of the IO-Link device

4.4.2 Standard I/O mode (SIO mode)

In standard I/O mode IO-Link devices behave like digital sensors or actuators. In this mode the devices only send input or output data to the higher-level instance. IO-Link access to the device is not possible.

5 Product Description

The devices are designed in protection class IP20.

The FEN20-4IOL IO-Link Master Module has four IO-Link ports for connecting IO-Link devices. The four IO-Link channels can be parameterized independently of each other and operated either in IO-Link mode, in SIO mode (DI) or as universal DXP channels.

With Turck's "Simple IO-Link Device Integration (SIDI)", IO-Link devices can be directly integrated into PROFINET via the GSDML file of the Devices.

If the IO-Link channels are used as DXP channels, they are freely usable as input or output.

For the connection of IO-Link devices and digital sensors and actuators four 10-pole terminal connector is provided. The power supply connectors are designed as 3-pole terminal connector.

5.1 Device overview

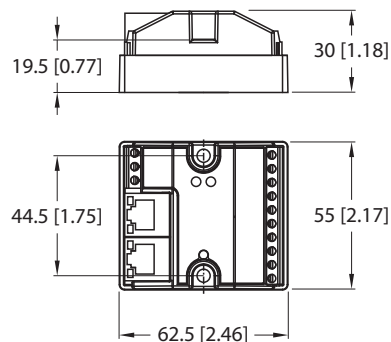


Fig. 4: Dimensions FEN20-4IOL

5.2 Properties and features

- Fibre-glass reinforced housing
- Shock and vibration tested
- Protection class IP20
- Terminal connector
- Multiprotocol functionality: PROFINET Device, EtherNet/IP Device, Modbus TCP Slave
- PROFINET:
 - Conformance Class B PA
 - Simple IO-Link Device Integration (SIDI)
 - Conformance according to PROFINET specification V2.35
 - System redundancy S2, network load class 3
- EtherNet/IP:
 - Support of the IO-Link Parameter Object for asynchronous services (IO-Link CALL)
 - Predefined in- and output assemblies
- Modbus TCP:
 - Modbus interface for asynchronous access via data streams

5.3 Operating principle

The IO-Link master module FEN20-4IOL connects IO-Link sensors and actuators with the higher-level control system. The device has an Ethernet interface and fieldbus-independent I/O electronics with IO-Link master functionality. Via the Ethernet interface, the IO-Link master is connected to an (existing) Ethernet network as an EtherNet/IP device, Modbus TCP slave or PROFINET device. During operation, the process data is exchanged between Ethernet and IO-Link. In addition, the IO-Link ports can be used as digital inputs and outputs.

5.4 Functions and operating modes

5.4.1 Multiprotocol technology

The devices can be used in the following three Ethernet protocols:

- Modbus TCP
- EtherNet/IP
- PROFINET

The required Ethernet protocol can be detected automatically or determined manually.

Automatic protocol detection

A multi-protocol device can be operated without intervention of the user (which means, without changes in the parameterization) in all of the three Ethernet protocols mentioned.

During the system start-up phase (snooping phase), the module detects which Ethernet protocol requests a connection to be established and adjusts itself to the corresponding protocol. After this an access to the device from other protocols is read-only.

Manual Protocol Selection

The user can also define the protocol manually. In this case, the snooping phase is skipped and the device is fixed to the selected protocol. With the other protocols, the device can only be accessed read-only.

Protocol Dependent Functions

The device Supported the following Ethernet protocol specific functions:

PROFINET

- FSU - Fast Start-Up (prioritized startup)
- Topology discovery
- Address assignment via LLDP
- MRP (Media Redundancy Protocol)

EtherNet/IP

- QC – QuickConnect
- Device Level Ring (DLR)

5.4.2 IO-Link channels

The IO-Link master module has four Class A IO-Link channels.

The four IO-Link channels can be parameterized independently of each other and operated either in IO-Link mode, in SIO mode (DI) or as universal DXP channels.

6 Mounting

The device can be mounted on a DIN rail according to EN 60715 (TS35) or screwed onto a flat mounting plate.

6.1 Mounting the device onto a mounting plate

- ▶ Attach the device to the mounting plate with two M4 screws. The maximum tightening torque for the M4 screws is 1.3 Nm
- ▶ Avoid mechanical stresses.
- ▶ Optional: Ground the device.

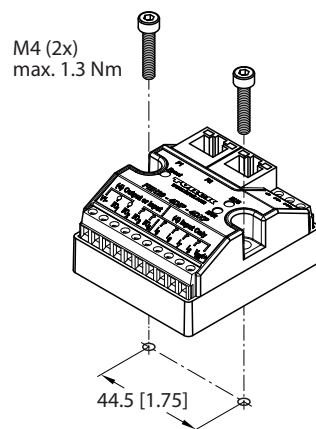


Fig. 5: Mounting the device onto a mounting plate

6.2 Mounting the device onto a DIN rail (TS35)

- ▶ Fasten the module or module composite to the mounting adapter (FDN20-BKT-DIN) with two M3 screws according to the following figure.

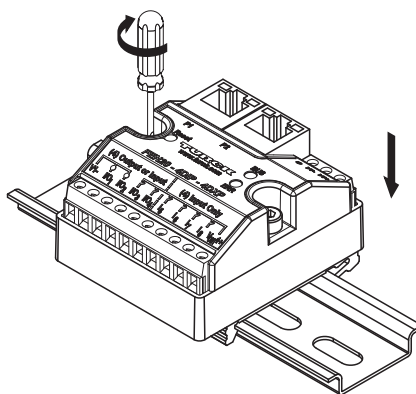


Fig. 6: Mounting the device with mounting adapter on DIN rail

- ▶ Place the device with the mounting adapter on the DIN rail so that the mounting adapter encloses the DIN rail (1).
- ▶ Avoid mechanical stresses.
- ▶ Optional: Ground the device.



NOTE

To increase stability on the mounting rail, end brackets can be mounted on the left and right side of the module.

6.3 Grounding the device

6.3.1 Fieldbus and I/O level shielding

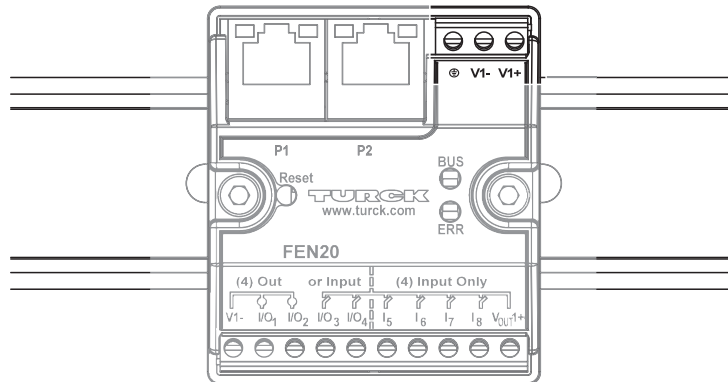


Fig. 7: Fieldbus and I/O level shielding

The module is connected to the reference potential of the system via the ground terminal.

7 Connecting

7.1 Connecting the device to Ethernet

For connection to Ethernet, the device has an autocrossing switch with two RJ45 Ethernet sockets.




Fig. 8: RJ45 sockets for Ethernet connection

- ▶ Connect the device to Ethernet according to the pin assignment.




Fig. 9: Ethernet connectors – pin assignment P1 and P2

7.2 Connecting the supply voltage

For the connection to the power supply, the device has a 3-pin screw terminal. The maximum tightening torque is 0.5 Nm.




Fig. 10: Terminal connector for connecting the supply voltage

- ▶ Connect the device to the power supply according to the pin assignment shown below.



Fig. 11: Pin layout of the Ethernet connections

7.3 Connecting IO-Link devices and digital sensors and actuators

The device has a 10-pole terminal screw connector for connecting IO-Link devices and digital sensors and actuators. The maximum tightening torque is 0.5 Nm.




Fig. 12: Terminal screw connector for connecting IO-Link devices and digital sensors and actuators



NOTICE

Wrong supply of IO-Link devices

Damage to the electronics

- ▶ Only supply IO-Link devices with the voltage provided at the 10-pole terminal screw connector.

- ▶ Connect IO-Link devices and digital sensors and actuators according to the pin assignment.




Fig. 13: Pin assignment

8 Commissioning

8.1 Setting the IP address

The device is factory set to IP address 192.168.1.254 and does not have a PROFINET device name. The IP address can be set via the Turck Service Tool, the DTM, the web server, a DHCP server or PROFINET DCP. The following example shows the setting of the IP address via the Turck Service Tool. The Turck Service Tool can be downloaded free of charge at www.turck.com.

- ▶ Connect the device to a PC via the Ethernet interface.
- ▶ Launch the Turck Service Tool.
- ▶ Click **Search** or press F5.

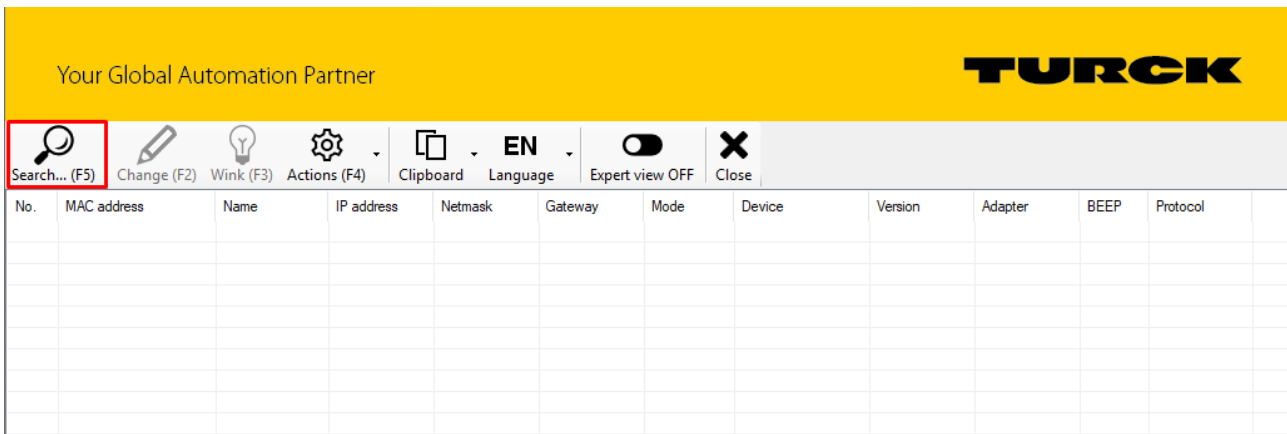


Fig. 14: Turck Service Tool – Start screen

The Turck Service Tool displays the connected devices.


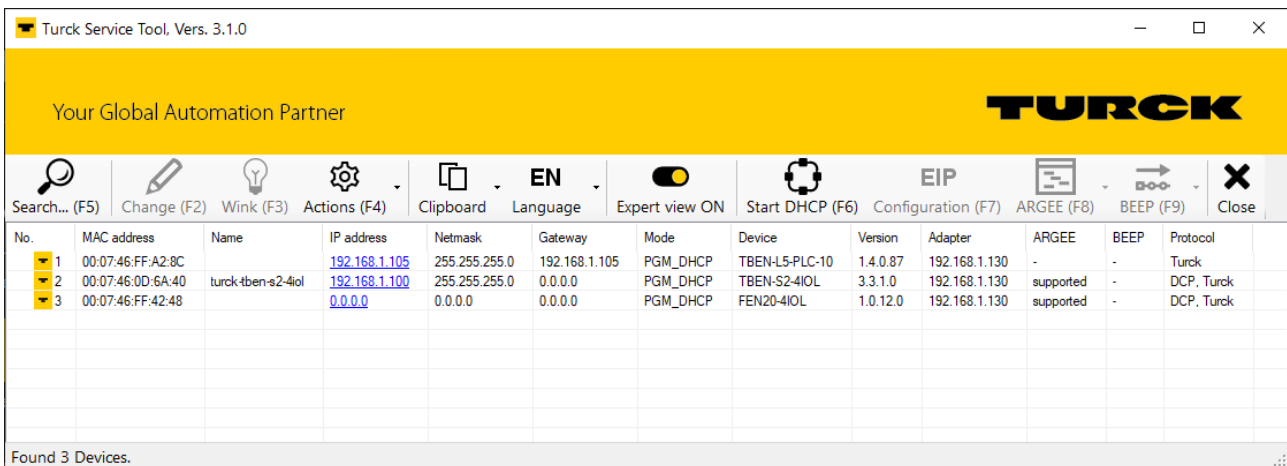


Fig. 15: Turck Service Tool – found devices

- ▶ Click the required device.
- ▶ Click **Change** or press [F2].

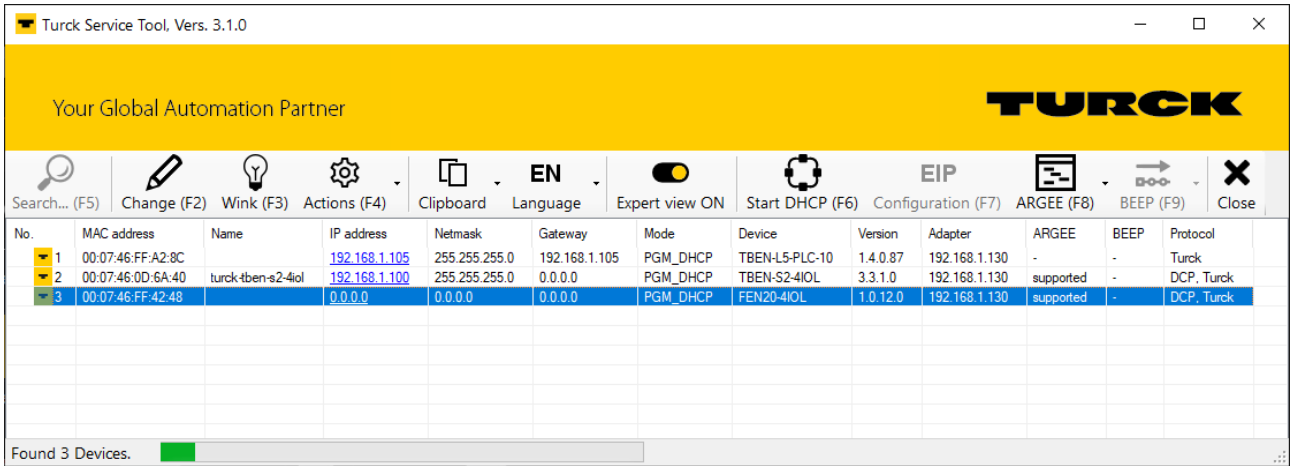

Turck Service Tool, Vers. 3.1.0

Your Global Automation Partner **TURCK**

Search... (F5) Change (F2) Wink (F3) Actions (F4) Clipboard Language EN Expert view ON Start DHCP (F6) Configuration (F7) ARGEE (F8) BEEP (F9) Close

No.	MAC address	Name	IP address	Netmask	Gateway	Mode	Device	Version	Adapter	ARGEE	BEEP	Protocol
1	00-07-46:FF-A2-8C		192.168.1.105	255.255.255.0	192.168.1.105	PGM_DHCP	TBEN-L5-PLC-10	1.4.0.87	192.168.1.130	-	-	Turck
2	00-07-46:0D-6A-40	turck-tbens-s2-4iol	192.168.1.100	255.255.255.0	0.0.0.0	PGM_DHCP	TBEN-S2-4IOL	3.3.1.0	192.168.1.130	supported	-	DCP, Turck
3	00-07-46:FF-42-48		0.0.0.0	0.0.0.0	0.0.0.0	PGM_DHCP	FEN20-4IOL	1.0.12.0	192.168.1.130	supported	-	DCP, Turck

Found 3 Devices.


Fig. 16: Turck Service Tool – select the device to be addressed



NOTE

Clicking the IP address of the device opens the web server.

- ▶ Change the IP address and if necessary the network mask and gateway.
- ▶ Accept the changes by clicking **Set in device**.

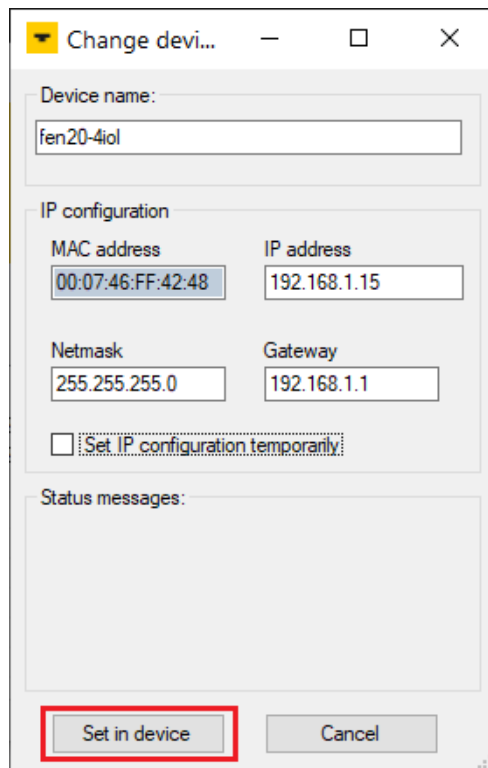

Change devi...

Device name:
fen20-4iol

IP configuration

MAC address: 00:07:46:FF:42:48
IP address: 192.168.1.15

Netmask: 255.255.255.0
Gateway: 192.168.1.1

Set IP configuration temporarily

Status messages:

Set in device Cancel

Fig. 17: Turck Service Tool – Change device configuration

8.2 ARGEE/FLC

The ARGEE FLC programming software can be downloaded free of charge from www.turck.com.

The Zip archive "SW_ARGEE_Environment_Vx.x.zip" contains the software and the respective software documentation.

8.3 Commissioning an IO-Link device with IO-Link V1.0

IO-Link devices in accordance with IO-Link specification V1.0 do not support data storage. If an IO-Link V1.0 device is used, data storage at the IO-Link port must be deactivated.

- ▶ Set **Data storage mode** at the port to **deactivated, clear**.
- ▶ Load the parameter changes into the device.
- ▶ Connect the IO-Link V1.0 device.
- ⇒ The LED IOL at the IO-Link port is green, IO-Link communication active.

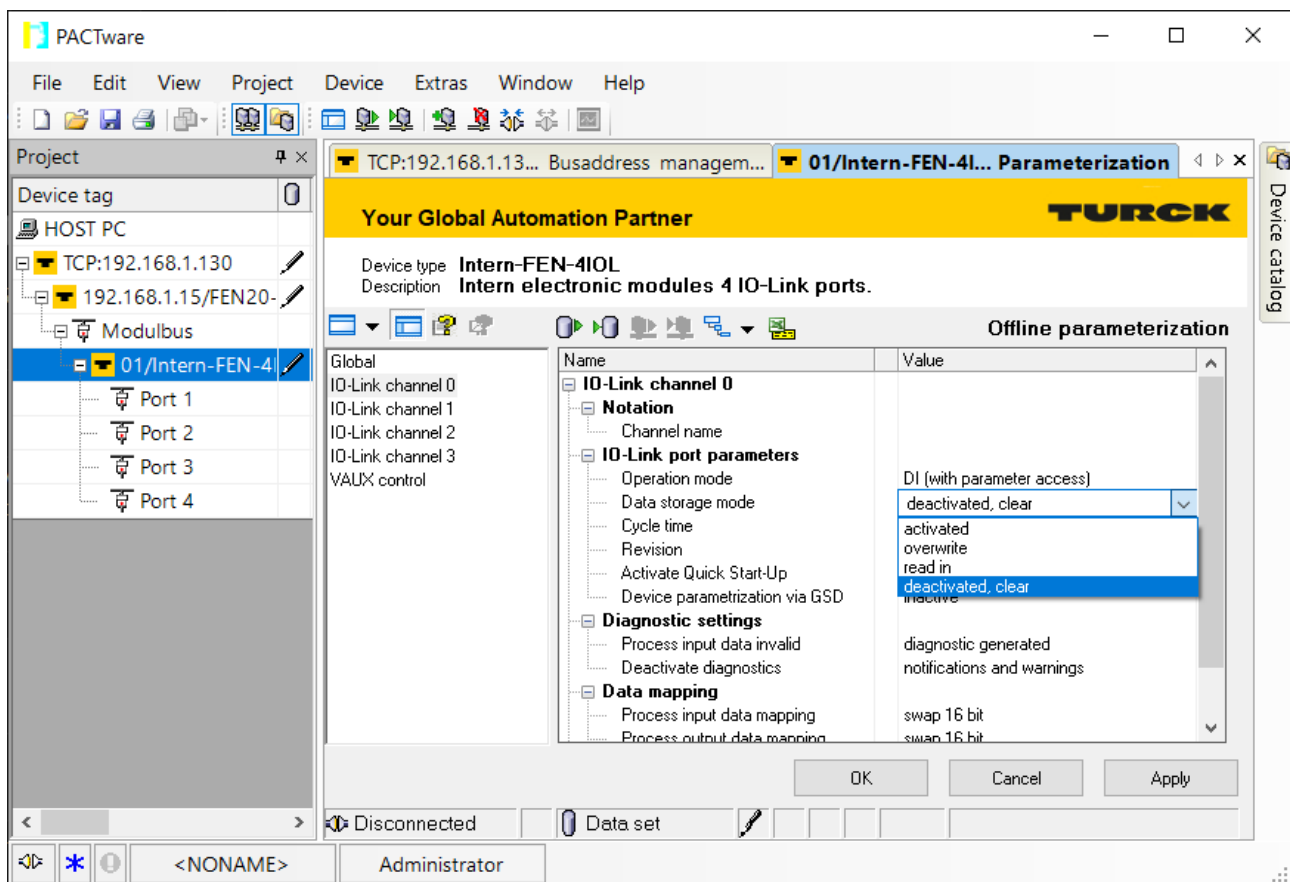


Fig. 18: Deactivate or respectively delete the data storage mode via DTM (example)

8.4 Commissioning an IO-Link device with IO-Link V1.1

The data storage of the master should be cleared before a device with a different device type is connected to an IO-Link port which has already been used before.

The data storage memory of the master can be deleted in two ways:

- Reset the master to factory settings.
- Delete the data storage memory using the parameter **Data storage mode**.

Reset the master to factory settings via DTM

- ▶ From the **Factory settings** drop-down menu, select **Set to factory settings**.
- ▶ Load the parameter changes into the device.
- ⇒ The DTM resets the device automatically.

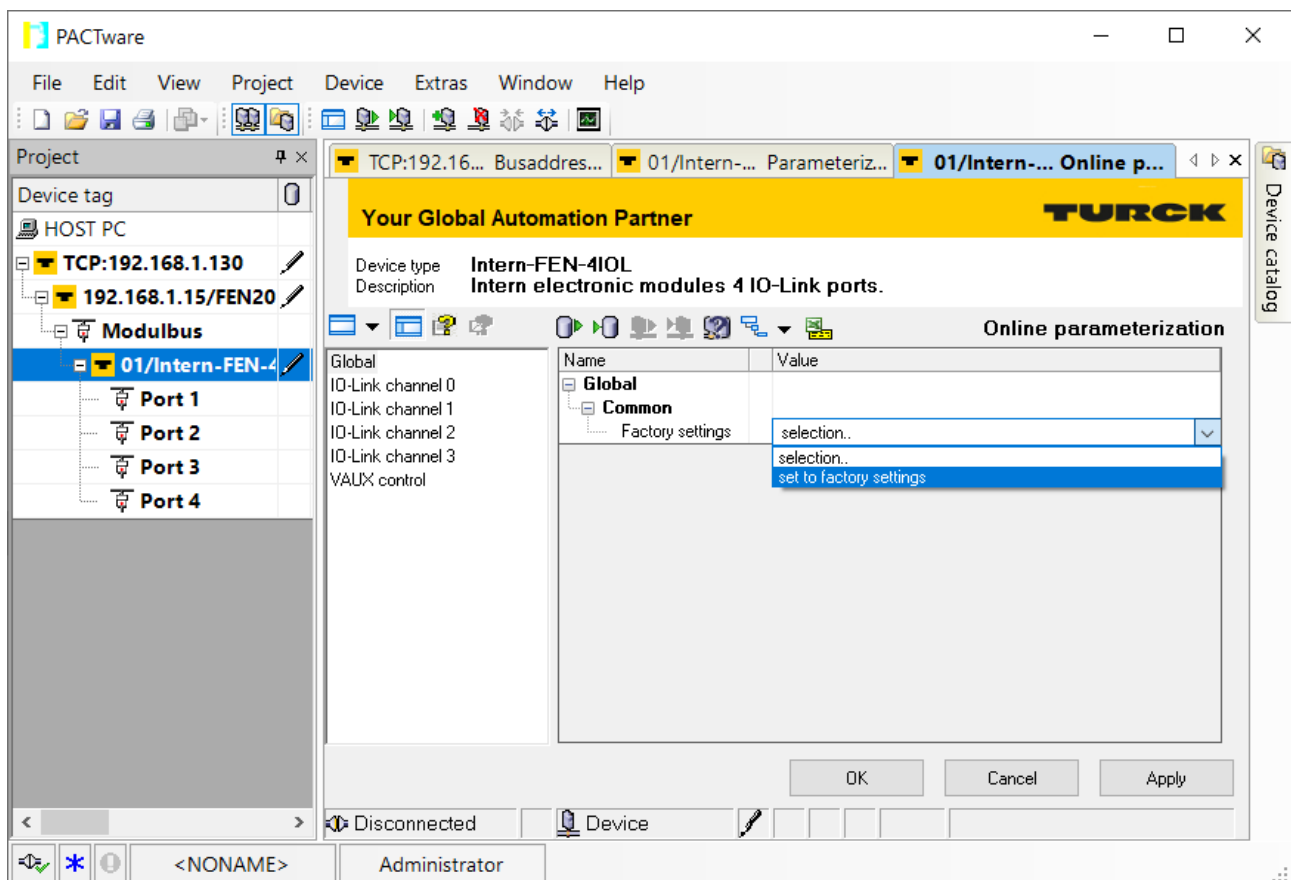


Fig. 19: Reset device to factory settings via DTM (example)

- ▶ Connect the IO-Link V1.1 device.
- ⇒ The LED IOL at the IO-Link port is green, IO-Link communication active.

Delete the data storage memory via parameters

- ▶ Set Data storage mode to **deactivated, clear**.
- ▶ Load the parameter changes into the device.
- ▶ Re-activate the data storage, if necessary.
- ▶ Load the parameter changes into the device.
- ▶ Connect the IO-Link V1.1 device.
- ⇒ The LED IOL at the IO-Link port is green, IO-Link communication active.

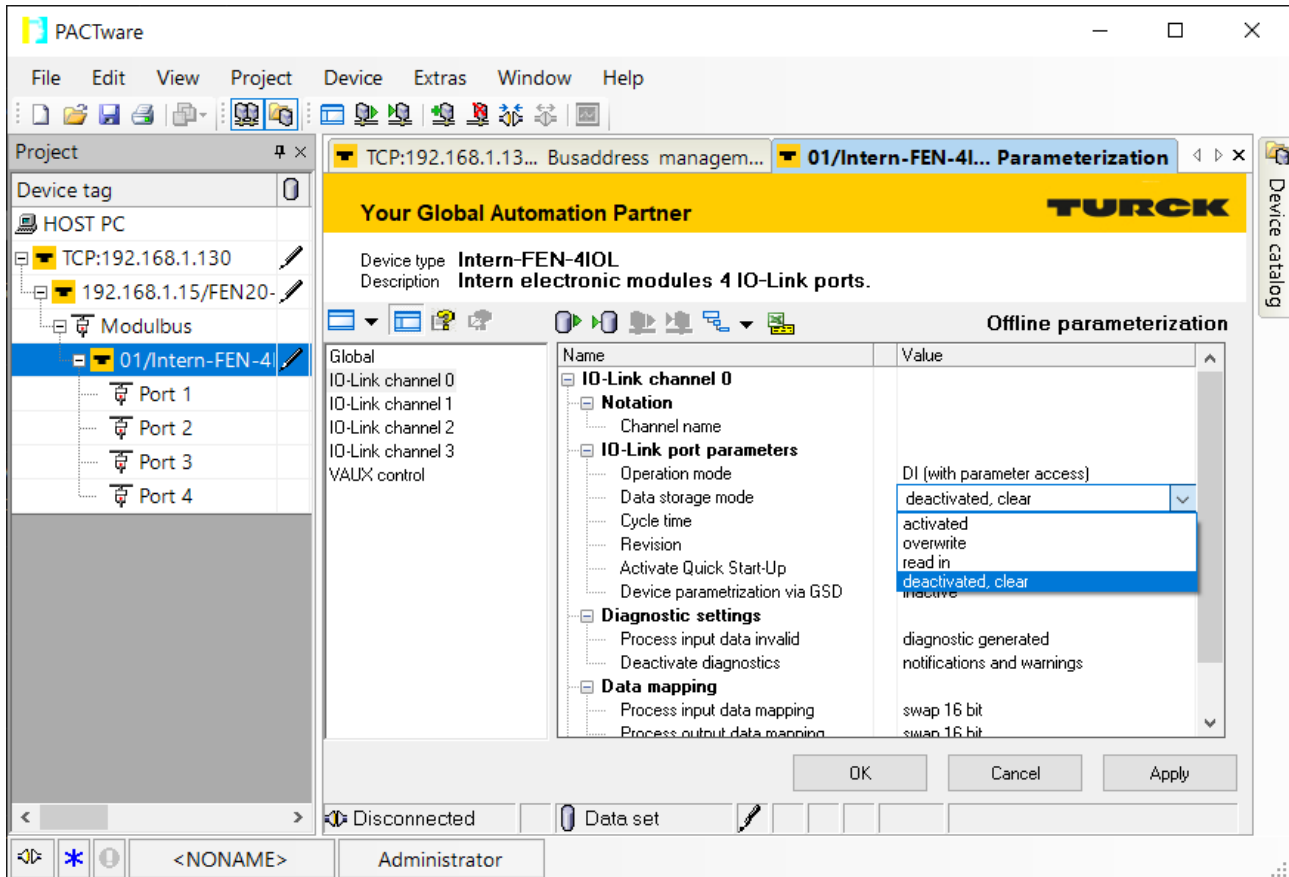


Fig. 20: Deactivate or respectively delete the data storage mode via DTM (example)

8.5 Read in connected IO-Link devices: topology scan in the DTM

The Topology Scan in PACTware allows to read-in of an IO-Link configuration down to the IO-Link device. IO-Link device, known in PACTware, are added to the IO-Link ports of the master. Either the respective sensor DTM in PACTware or the sensor IODDs via IODD DTM Configurator have to be installed.

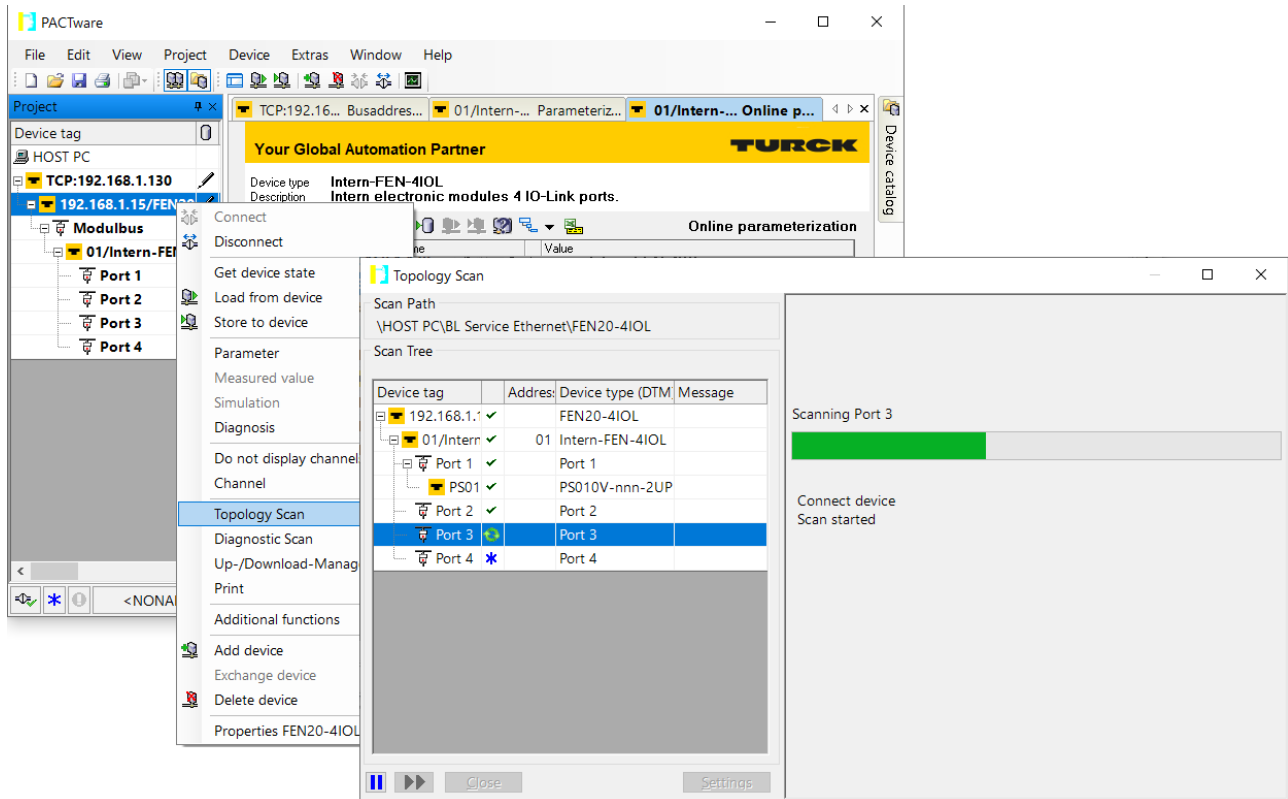


Fig. 21: PACTware – topology scan

8.6 Commissioning the Device in PROFINET

8.6.1 PROFINET IO device model

The technical properties of PROFINET IO devices are defined via their device description file, the GSDML file. A PROFINET IO device consists of 1...n slots, which can also contain 1...n sub slots. Sub slots are placeholders for sub modules and establish the interface to the process. Sub modules can contain parameters, data and diagnostics.

Slot 0 is always reserved as Device Access Point (DAP). The DAP contains the physical interface to the Ethernet network and represents the device. The other slots and sub slots represent the other device functions. The structure is defined by the manufacturer of field devices. It is not necessary that every slot or respectively sub slot is related to physical functions. The allocation of the slots and sub slots and thus the assignment of functions (operation mode, diagnostics, etc.) is done in the configuration software of the PROFINET controller. This device model allows manufacturers to design modular and flexible decentral field devices. Users are flexible in configuring decentralized field devices.

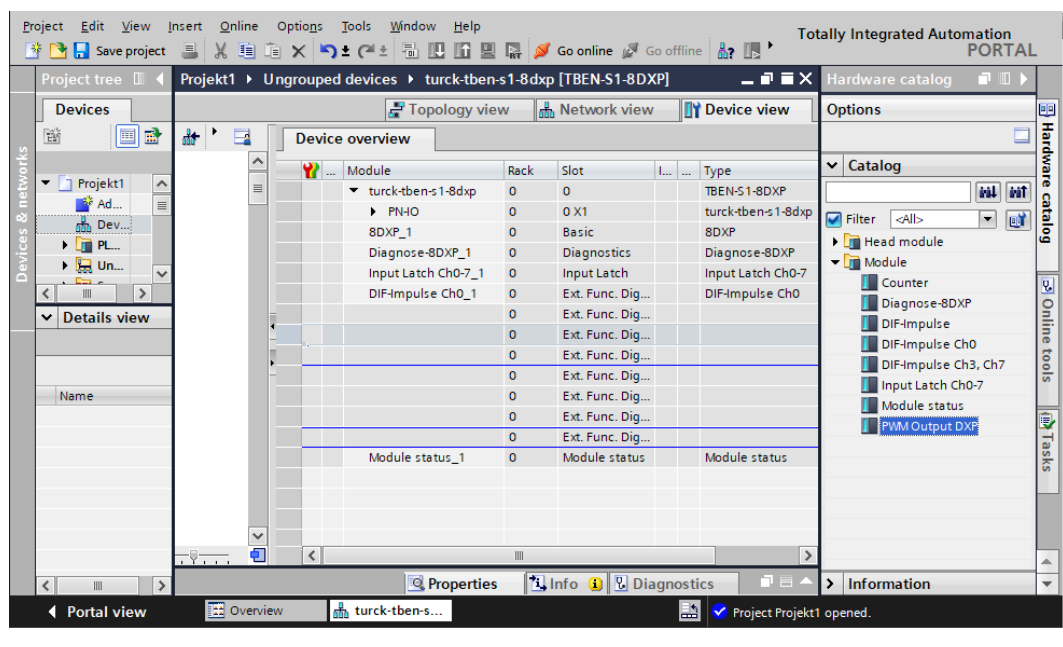


Fig. 22: TIA-Portal – assignment of the slots and sub slots on the example of an TBEN-S1-8DXP

8.6.2 Device model – FEN20-4IOL

The FEN20-4IOL has four configurable IO-Link channels, which can also be configured as four digital inputs or outputs. In addition to that, three virtual slots are provided via GSDML in PROFINET. Those channels are used to map the different diagnostic and status (IO-Link and VAUX diagnostics, IO-Link-Events, module status) data into the master's process image .

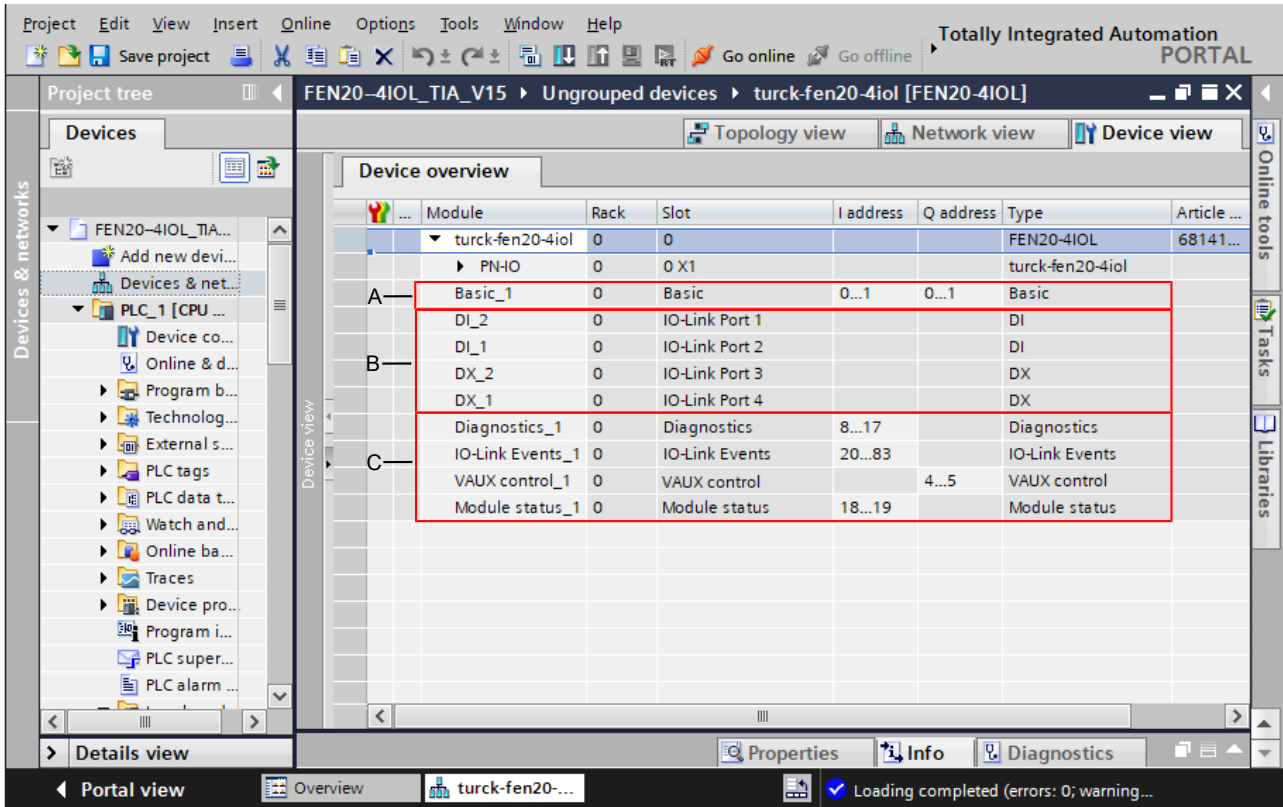


Fig. 23: FEN20-4IOL – slot overview in in TIA-Portal

A	Basic slot for e. g. DXP-channels and Data Valid Signal
B	IO-Link ports for the configuration with specific IO-Link devices or for generic configuration
C	one slot each for diagnostics and status

8.6.3 Address setting in PROFINET

In IP-based communication, the field devices are addressed by means of an IP address. PROFINET uses the Discovery and Configuration Protocol (DCP) for IP assignment.

When delivered, each field device has, among other things, a MAC address. The MAC address is sufficient to give the respective field device a unique name.

The address is assigned in two steps:

- Assignment of a unique plant specific name to the respective field device.
- Assignment of the IP address from the IO-Controller before the system start-up based on the plant-specific (unique) name.

PROFINET naming convention

The names are assigned via DCP. The device name must meet the requirements of the Domain Name System (DNS) (see below). The device name is checked for correct spelling during input.

**NOTE**

The maximum length of the device name is 255 characters according to the specification. In a Step7 or TIA Portal environment, however, only names with a maximum length of 127 characters are accepted.

- All device names must be unique.
- Maximum name size: 255 or 127 characters (a...z, 0...9, "-" or "...")
- Do not use capital letters.
- The name must not begin or end with "-".
- Do not use special characters
- The name must not begin with 0...9 or "port-xyz" (xyz = 0...9).

8.6.4 FSU – Fast Start-Up (prioritized startup)

FSU - Fast Start-Up is not supported by device.

8.6.5 MRP (Media Redundancy Protocol)

The device supports MRP.

MRP is a standardized protocol according to IEC 62439. It describes a mechanism for media redundancy in ring topologies. With MRP, a defective ring topology with up to 50 nodes is detected and reconfigured in the event of an error. With MRP a trouble-free switch-over is not possible.

A Media Redundancy Manager (MRM) checks the ring topology of a PROFINET network defined by the network configuration for functionality. All other network nodes are Media Redundancy Clients (MRC). In the error-free state, the MRM blocks normal network traffic on one of its ring ports, with the exception of the test telegrams. The physical ring structure thus becomes a line structure again at the logical level for normal network traffic. If a test telegram fails to appear, a network error has occurred. In this case, the MRM opens its blocked port and establishes a new functioning connection between all remaining devices in the form of a linear network topology.

The time between ring interruption and recovery of a redundant path is called reconfiguration time. For MRP, this is a maximum of 200 ms. Therefore, an application must be able to compensate for the 200 ms interruption. The reconfiguration time always depends on the Media Redundancy Manager (e.g. the PROFINET PLC) and the I/O cycle and watchdog times set here. For PROFINET, the response monitoring time must be selected accordingly > 200 ms.

It is not possible to use Fast Start-Up in an MRP network.

8.6.6 User data for acyclic services

IM99 (IOL_M)

Name	Size	Data type	Default setting
IOL_LINK_VERSION	1 byte	UINT8	17 (0x11)
IO_LINK_PROFILE_VERSION	1 byte	UINT8	0 (0x00)
IO_LINK_FEATURE_SUPPORT	4 byte	UINT32	0 (0x00)
NUMBER_OF_PORTS	1 byte	UINT8	4 (0x04)
REF_PORT_CONFIG	1 byte	UINT8	0 (0x00)
REF_IO_MAPPING	1 byte	UINT8	0 (0x00)
REF_IOL_M	1 byte	UINT8	0 (0x00)
NUMBER_OF_CAP	1 byte	UINT8	5 (0x05)

8.6.7 The IO-Link function block IOL_CALL

The IO-Link function block IOL_CALL is specified in the IO-Link specification "IO-Link Integration Part 1- Technical Specification for PROFIBUS and PROFINET".

Depending on the PLC manufacturer, the IO-Link CALL function block can differ from the specification (for example in the representation or the use of variables).

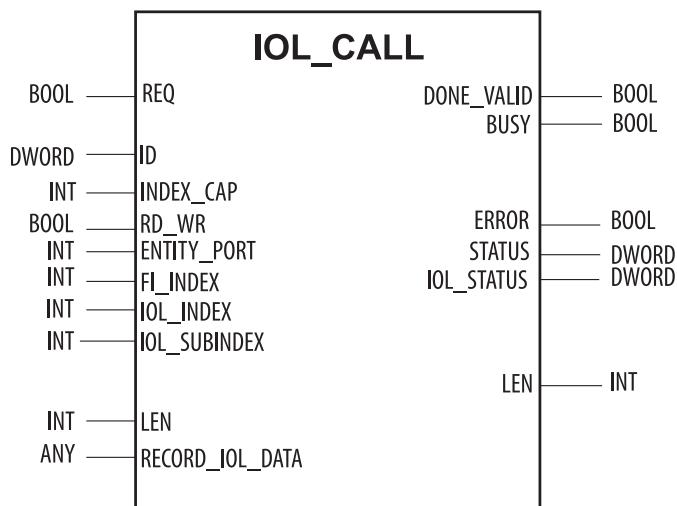


Fig. 24: IOL_CALL in accordance with IO-Link specification

IOL_CALL– input variables

Designation acc. IO-Link spec.	Data type	Meaning
REQ	BOOL	A rising edge triggers the send command.
ID	DWORD	Address of the IO-Link master module Step 7 Classic ■ Start address of the input data of the IO-Link master module. TIA Portal ■ older Siemens CPUs (e.g. CPU 315): Start address of the input data of the IO-Link master module. ■ recent Siemens CPUs (e.g. CPU 1511): HW identifier of the device's "Basic" slot
INDEX_CAP	INT	Function block instance: 247 to 254, 255
RD_WR	BOOL	0 = read access 1 = write access
ENTITY_ PORT	INT	Address of the IO-Link port to be accessed
FI_INDEX	INT	Fix value (65098): defines the access to be an IO-Link CALL
IOL_INDEX	INT	Number of the IO-Link index which has to be read
IOL_ SUBINDEX	INT	Definition of a possible sub index.
LEN	INT	Length of the data to be read/written. This information is not necessary for the Siemens IOL_CALL.
RECORD_ IOL_DATA	ANY	Source/destination for the data to be read/written.

IOL_CALL – output variables

Designation acc. IO-Link spec.	Data type	Meaning
DONE_VALID	BOOL	The read or write access has been executed.
BUSY	BOOL	The read or write access is actually in progress.
ERROR	BOOL	Error while reading or writing.
STATUS	DWORD	Communication error status of the acyclic communication [▶ 32]
IOL_STATUS	DWORD	IO-Link error messages (in accordance with "IO-Link Integration Part 1- Technical Specification for PROFIBUS and PROFINET" and "IO-Link Interface and System"), which concern the communication between IO-Link master and connected devices [▶ 33].
LEN	INT	Length of the read data

IOL_CALL – communication error status

The status of the acyclic communication contains 4 byte and is structured as follows:

Byte 3	Byte 2	Byte 1	Byte 0
Manufacturer specific identifier (not always applicable)	0x80 Specifies the error as an error of acyclic communication.	Error code/ status code	Vendor specific identifier (not always applicable)

Status Code	Name	Meaning
0xFF000000	TIMEOUT	Internal error in the communication with the module
0x00FFF00	INVALID_HANDLE	
0x00FFFE00	HANDLE_OUT_OF_BUFFERS	
0x00FFFD00	HANDLE_DESTINATION_UNAVAILABLE	
0x00FFFC00	HANDLE_UNKNOWN	
0x00FFB00	HANDLE_METHOD_INVALID	
0xXX80A0XX	MASTER_READ_ERROR	Error while reading
0xXX80A1XX	MASTER_WRITE_ERROR	Error while writing
0xXX80A2XX	MASTER_MODULE_FAILURE	Failure of the IO-Link master, bus failure possible
0xXX80A6XX	MASTER_NO_DATA	No data received
0xXX80A7XX	MASTER_BUSY	IO-Link master busy
0xXX80A9XX	MASTER_FEATURE_NOT_SUPPORTED	Function not supported by IO-Link master.
0xXX80AAXX	MASTER_RESOURCE_UNAVAILABLE	IO-Link master not available.
0xXX80B0XX	ACCESS_INVALID_INDEX	Index invalid, wrong INDEX_CAP used
0xXX80B1XX	ACCESS_WRITE_LENGTH_ERROR	Length of data to be written can not be handled from the module, wrong module accessed.
0xXX80B2XX	ACCESS_INVALID_DESTINATION	Wrong slot accessed
0xXX80B03XX	ACCESS_TYPE_CONFLICT	IOL_CALL invalid
0xXX80B5XX	ACCESS_INVALID_INDEX	Error in IOL_CALL sequence
0xXX80B6XX	ACCESS_DENIED	IO-Link master module refuses the access.
0xXX80C2XX	RESOURCE_BUSY	The IO-Link master module is busy or is waiting for an answer of the connected IO-Link device.
0xXX80C3XX	RESOURCE_UNAVAILABLE	
0xXX8901XX	INPUT_LEN_TOO_SHORT	The index to be read contains more data than defined in the input variable "LEN".

IOL_CALL – IOL_STATUS

The IOL_STATUS consists of 2 byte Error Code (IOL_M Error_Codes, according to "IO-Link Integration Part 1- Technical Specification for PROFIBUS and PROFINET") and 2 byte Error Type (according to "IO-Link Interface and System").

Byte 3	Byte 2	Byte 1	Byte 0
IOL_M-Error-Code		IOL-Error Type	

IOL_M-Error-Code	Designation acc. to IO-Link Spec.	Meaning
0x0000	No error	No error
0x7000	IOL_CALL Conflict	Unexpected write-request, read request expected
0x7001	Wrong IOL_CALL	Decoding error
0x7002	Port blocked	The accessed port is occupied by another task
...	reserved	
0x8000	The accessed port is occupied by another task	Timeout, IOL master or IOL device port busy
0x8001	Wrong index	Error: IOL index < 32767 or > 65535 selected
0x8002	Wrong port address	Port address not available
0x8003	Wrong port function	Port function not available
...	reserved	

IOL-Error Type	Designation acc. to IO-Link Spec.	Meaning
0x1000	COM_ERR	Communication error Possible source: the addressed port is parameterized as digital input DI and is not in IO-Link mode
0x1100	I_SERVICE_TIMEOUT	Timeout in communication, device does not respond in time
0x5600	M_ISDU_CHECKSUM	Master reports checksum error, access to device not possible
0x5700	M_ISDU_ILLEGAL	Device can not respond to master request
0x8000	APP_DEV	Application error in the device
0x8011	IDX_NOTAVAIL	Index not available
0x8012	SUBIDX_NOTAVAIL	Sub-Index not available
0x8020	SERV_NOTAVAIL	The service is temporarily not available.
0x8021	SERV_NOTAVAIL_LOCCTRL	Service temporarily not available, device is busy (e. g. teaching or parameterization of the device via the master active)
0x8022	SERV_NOTAVAIL_DEVCTRL	Service temporarily not available, device is busy (e. g. teaching or parameterization of the device via DTM/PLC etc. active)
0x8023	IDX_NOT_WRITEABLE	Access denied, Index cannot be written
0x8030	PAR_VALOUTOFRNG	Parameter value out of the valid range
0x8031	PAR_VALGTLIM	Parameter value above the upper limit
0x8032	PAR_VALLTIM	Parameter value value below the lower limit

IOL-Error Type	Designation acc. to IO-Link Spec.	Meaning
0x8033	VAL_LENVERRUN	Length of data to be written does not match the length defined for this parameter
0x8034	VAL_LENUNDRUN	
0x8035	FUNC_NOTAVAIL	Function not available in the device
0x8036	FUNC_UNAVAIL-TEMP	Function temporarily unavailable in the device
0x8040	PARA_SETINVALID	Invalid parameter: Parameters not consistent with other parameters in the device.
0x8041	PARA_SETINCONSIST	Inconsistent parameters
0x8082	APP_DEVNOTRDY	Application not ready, device busy
0x8100	UNSPECIFIC	Vendor specific, according to device documentation
0x8101...	VENDOR_SPECIFIC	
0x8FF		

8.7 Connecting the device to a Siemens PLC in PROFINET

The following example describes the connection of the devices to a Siemens PLC in PROFINET by means of the programming software SIMATIC STEP7 Professional V13 (TIA-Portal).

Used Hardware

The following hardware components are used in this example:

- Siemens PLC S7-1500
- IO-Link master FEN20-4IOL with the following configuration:
 - Port 1: Turck temperature sensor, TS-530-LI2UPN8X-..., IO-Link V1.0
 - Port 2: Channel used as DI
 - Port 3: Turck linear position sensor, Li100P0-Q25LM0-..., IO-Link V1.0
 - Port 4: Turck IO-Link hub: TBIL-M1-16DXP, IO-Link V1.1

Used Software

The following software tools are used in this example:

- SIMATIC STEP7 Professional V15 (TIA-Portal)
- GSDML file for FEN20-4IOL (can be downloaded for free as ZIP archive "FEN20_PROFINET.zip" under www.turck.com)

Prerequisites

- The programming software has been started.
- A new project has been created.
- The PLC has been added to the project.

8.7.1 Installing the GSDML file

The GSDML file can be downloaded for free from www.turck.com.

- ▶ Adding the GSDML-file: Click "Options" → "Manage general station description files (GSD)".
- ▶ Installing the GSDML-file: Define the source path for the GSDML-file and click **Install**.
- ⇒ The device is added to the Hardware catalog of the programming software.




Fig. 25: Installing the GSDML-file

8.7.2 Connecting the devices to the PLC

- ▶ Select the FEN20-4IOL from the Hardware catalog and drag them into the "Device & networks" editor.
- ▶ Connect the devices to the PLC in the "Devices & networks" editor.

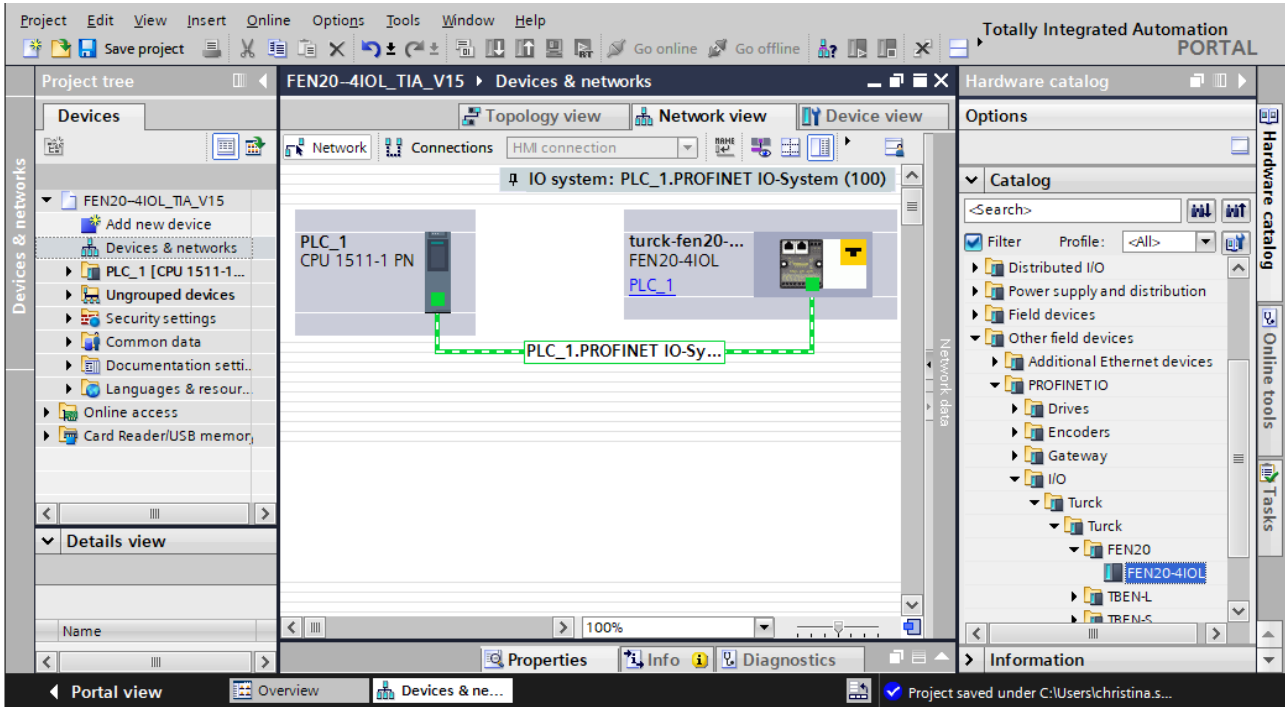


Fig. 26: Connecting the device to the PLC

8.7.3 Assigning the PROFINET device name

- ▶ Select **Online access** → **Online & diagnostics**.
- ▶ **Functions** → **Assign PROFINET device name**.
- ▶ Assign the desired PROFINET device name with **Assign name**.

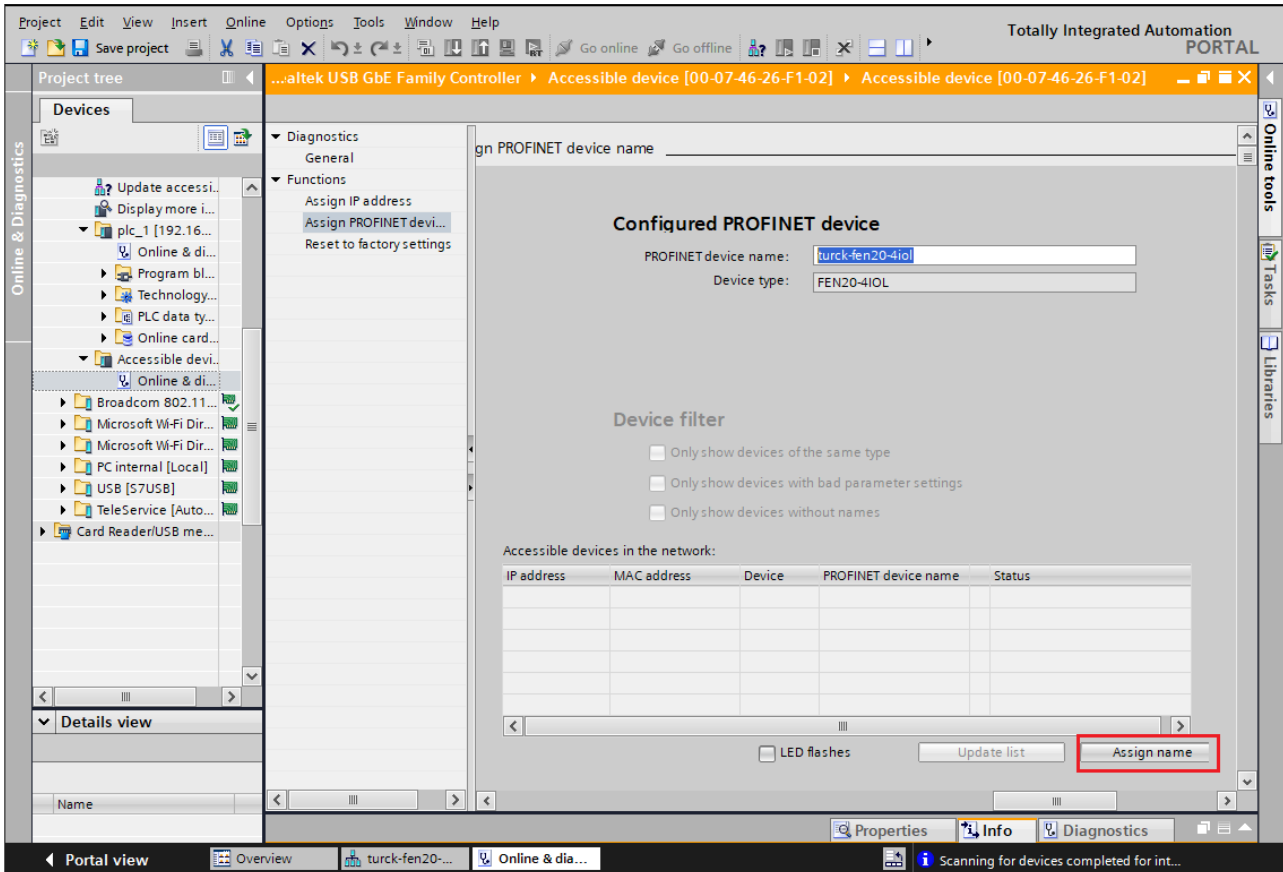


Fig. 27: Assigning the PROFINET device name

8.7.4 Setting the IP address in TIA Portal

- ▶ Select Device view → Properties → Ethernet addresses.
- ▶ Assign the desired IP address.

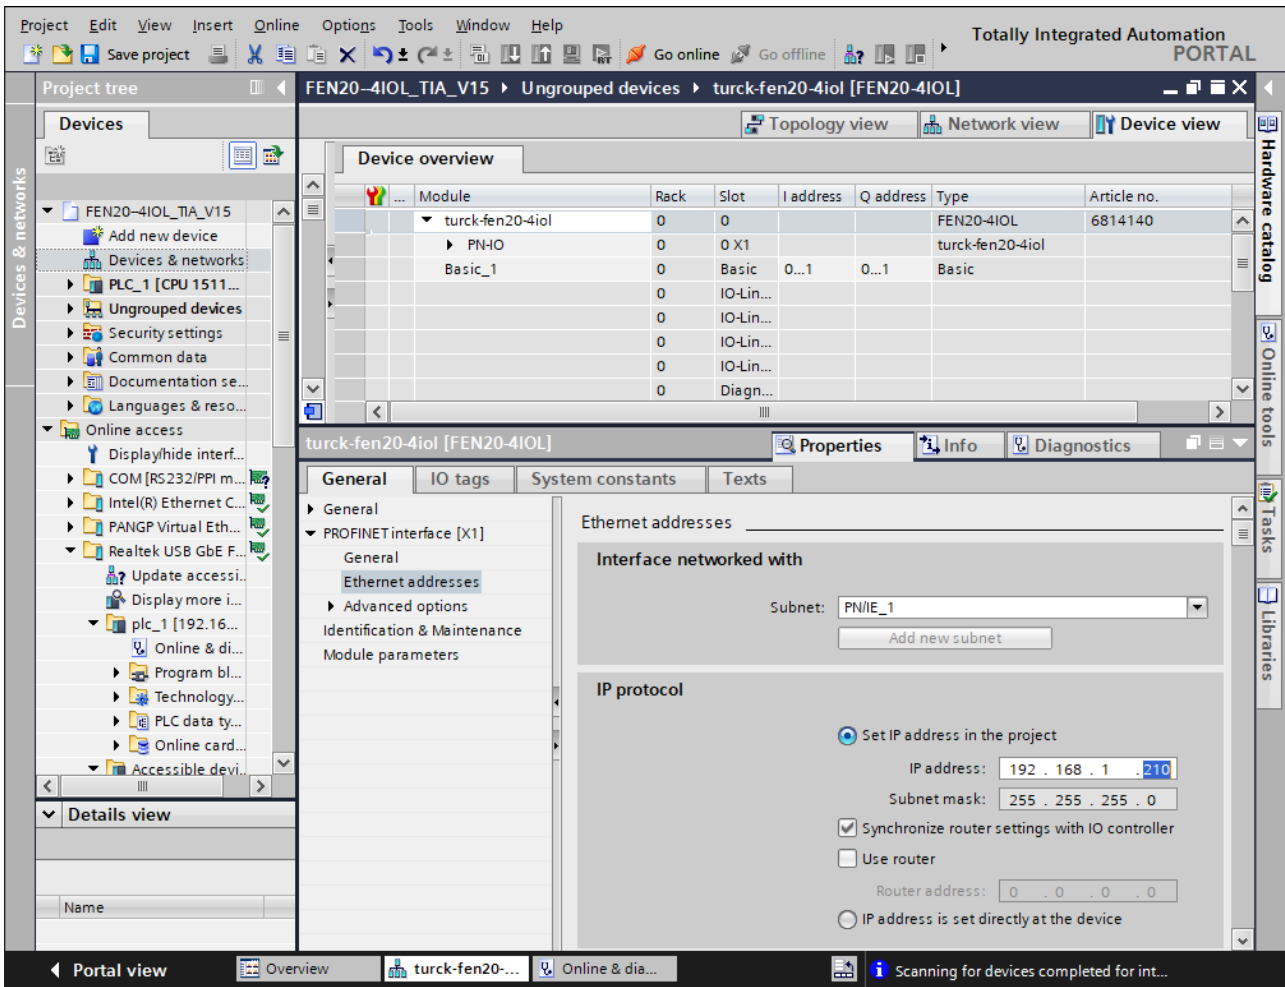


Fig. 28: Assigning the IP address

8.7.5 Configuring device functions

The FEN20-4IOL appears as a modular slave with eight empty virtual slots. Slots 0 and **Basic** are pre-configured.

The function of these eight slots is either defined via GSDML or can only be used for a specific purpose.

Slot	Meaning
0	Main module turck-fen20-4iol (default name) Parameterization of functions (protocol deactivation, etc.), which concern the complete module.
0 X1	Parameterization of PROFINET functions (MRP, etc.)
0 X1 P1	Parameterization of the Ethernet port properties (topology, connection options etc.).
0 X1 P2	
Basic	Parameters/diagnostics of the IO-Link channels of the device, if the ports are used as pure digital channels (DI/DXP)
IO-Link port 1...4	Configuration of the IO-Link ports
Diagnostics	Optional mapping of the diagnostics (IO-Link and DXP diagnostics) into the master's process image.
IO-Link Events	Optional mapping of the IO-Link events into the master's process image.
VAUX Control	Optional mapping of the VAUX diagnostics into the master's process image.
Module status	Optional mapping of the module status into the masters process image.

Configuring the IO-Link Ports (Example)

IO-Link-Port (Hardware)	Process data length	Sensor	GSDML entry
Port 1	2 byte IN	Turck temperature sensor, TS-530-LI2UPN8X-...	Port configuration generic: IN 1 WORD
Port 2	1 Bit IN	-	DI
Port 3	2 byte IN	Turck linearity sensor, Li100P0-Q25LM0-...	Port configuration specific: Li100P0-QU25L
Port 4	2 byte IN 2 byte OUT	Turck I/O hub, TBIL-M1-16DXP	Port configuration specific: TBIL-M1-16DXP

- ▶ Select **Device view** → **Device overview**.
- ▶ Select functions as operation mode, diagnostics Diagnostics etc. from the hardware catalog and add them to the device slots via drag&drop.

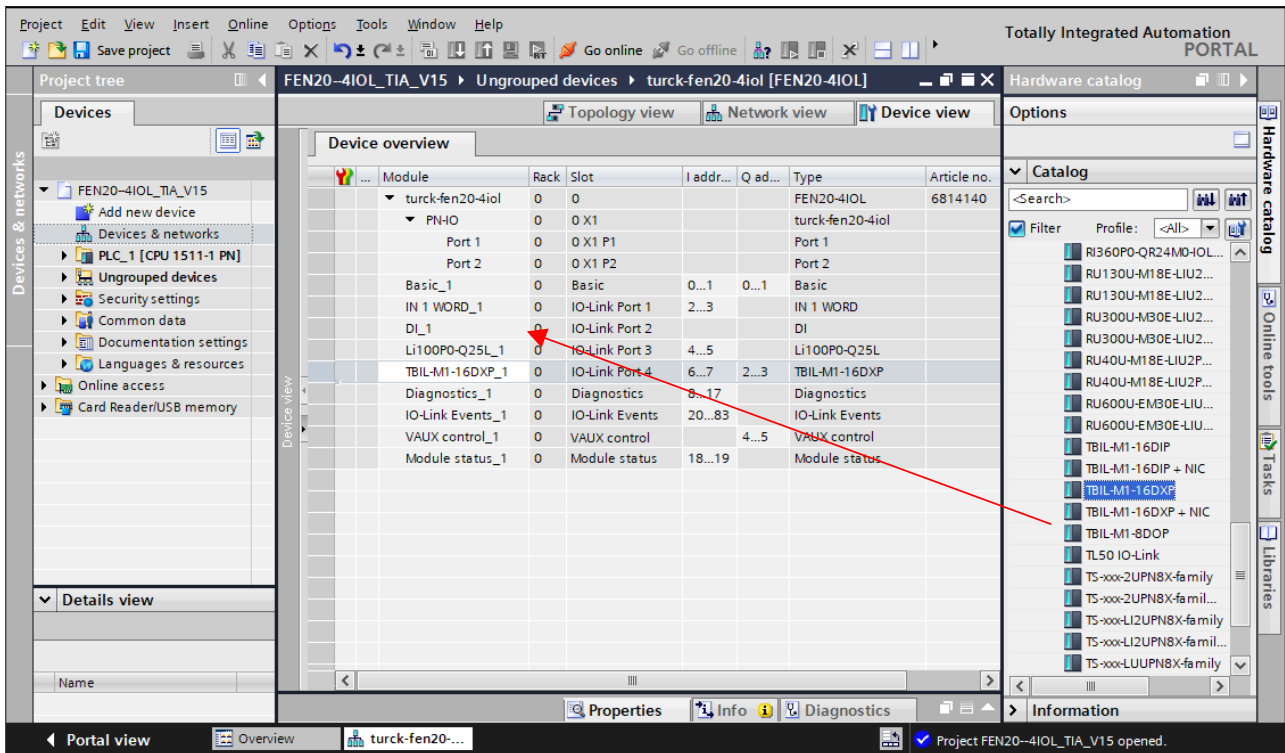


Fig. 29: TIA-Portal – configuring device slots

Setting IO-Link port parameters

In generic port configuration, the ports of the IO-Link master can be operated in IO-Link mode with different configuration as well as in SIO mode (DI).

In specific port configuration, the IO-Link ports receive the parameters from the GSDML-file. Parameters like for example Operation mode, Data storage mode, Vendor- and Device ID cannot be changed.

- ▶ Select **Device view** → **Device overview**.
- ▶ Select the device to be parameterized.
- ▶ Click **Properties** → **General** → **Module parameters**.
- ▶ Set the device parameters.

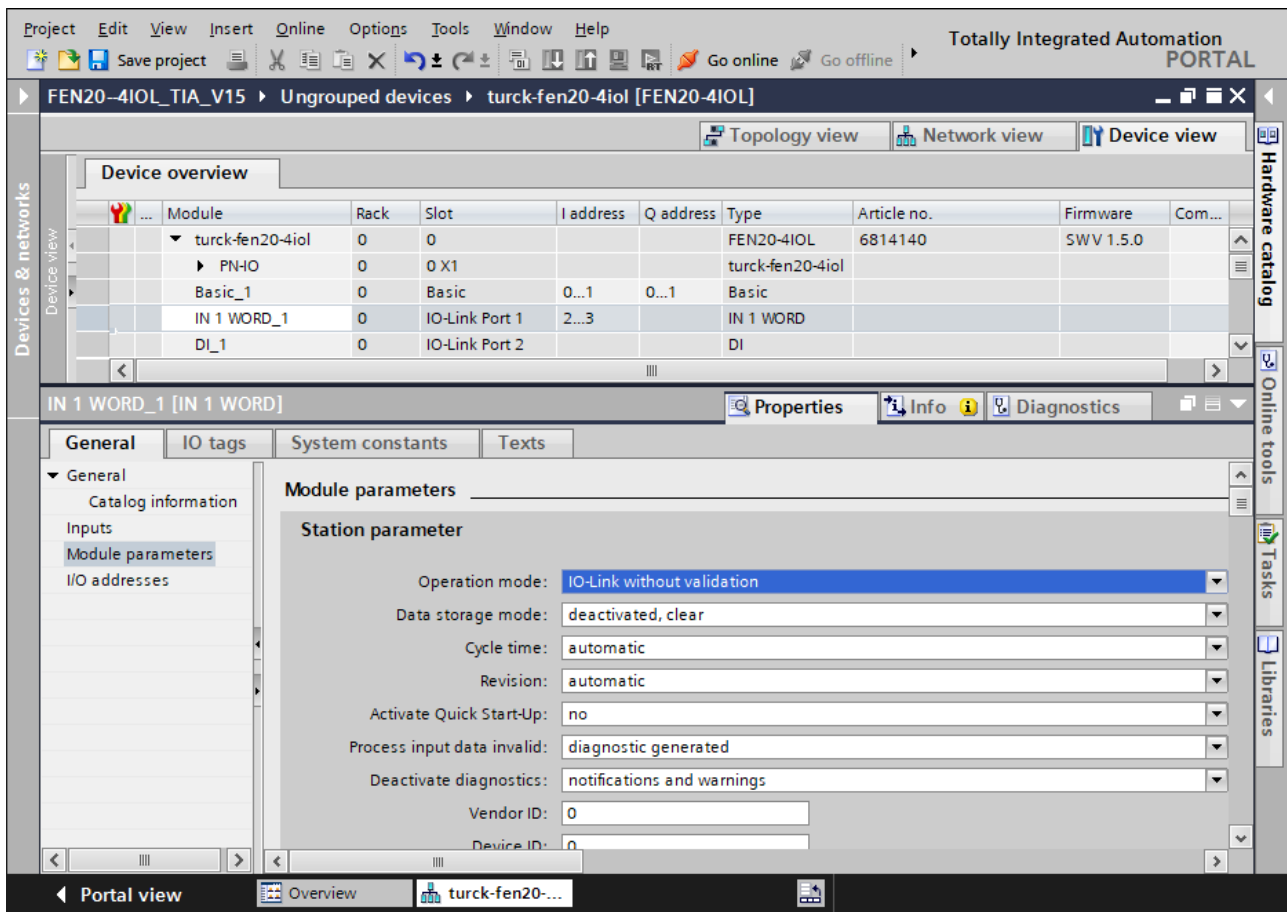


Fig. 30: TIA-Portal – Parameterizing generic IO-Link-Devices

8.7.6 Going online with the PLC

- ▶ Start the online mode (Go online).
- ⇒ The device has been successfully connected to the PLC.

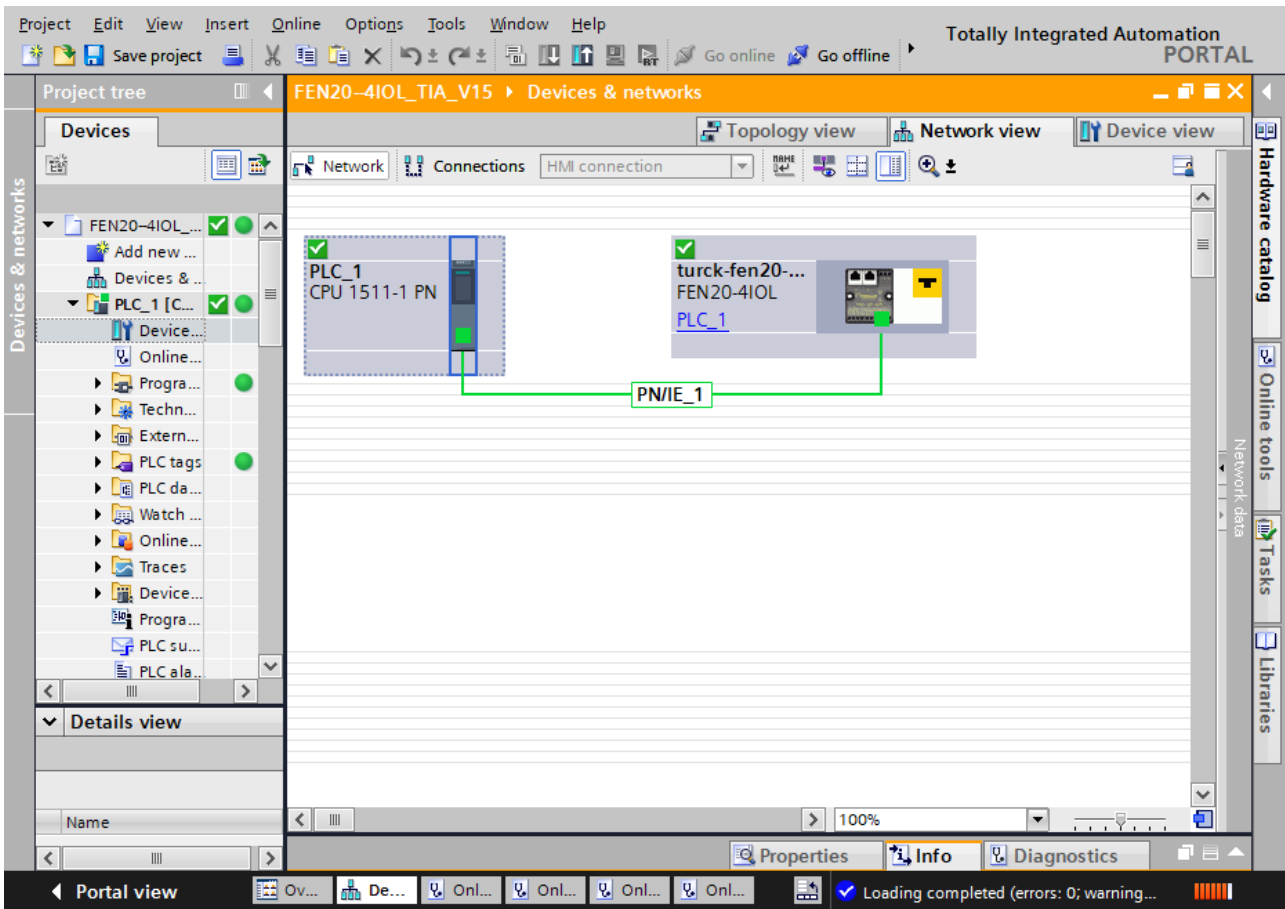


Fig. 31: Online mode

8.7.7 PROFINET – mapping

The PROFINET mapping corresponds to the data mapping described in the sections "Process Input Data" Process input data and „Process Output Data"Process output data.

8.7.8 Use the IO_LINK_DEVICE function block in TIA Portal

The IO_LINK_DEVICE function block is based on the IOL_CALL function block according to the IO-Link specification.

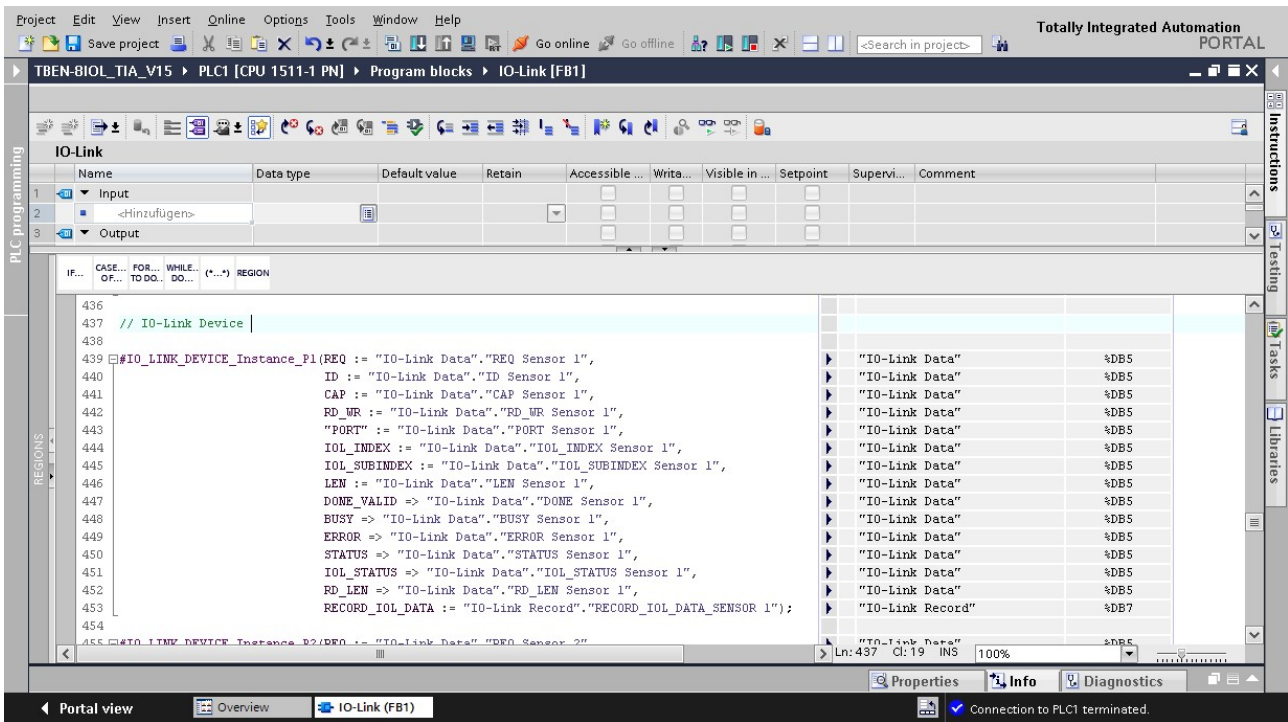


Fig. 32: Example call of Siemens FB "IO_LINK_DEVICE"



NOTE

The access to the port 0 functions of the IO-Link master with an IOL_INDEX of 65535 is not possible with version V3.0.2 of the Siemens IO_LINK_DEVICE block. In TIA-Portal V15, the old IOL_CALL function block can be used to access the port 0 functions. Siemens provides the function block for TIA-Portal users under <https://support.industry.siemens.com>.

Example accesses with IO_LINK_DEVICE

In this example, the watch table **Sensor1** serves to visualize the procedure of the read and write access via IO_LINK_DEVICE. The assignment of the SPDU-indices of IO-Link devices can be found in the respective device documentation.

The function block access to the device and the connected sensors is done via the input variable **ID**. The value which has to be set as ID depends on the used CPU:

Example:

- HW identifier of the **basic** slot (slot 1), for example with CPU 1511-PN (used in this example)
- Start address of the input data of the IO-Link master e.g. with CPU 315

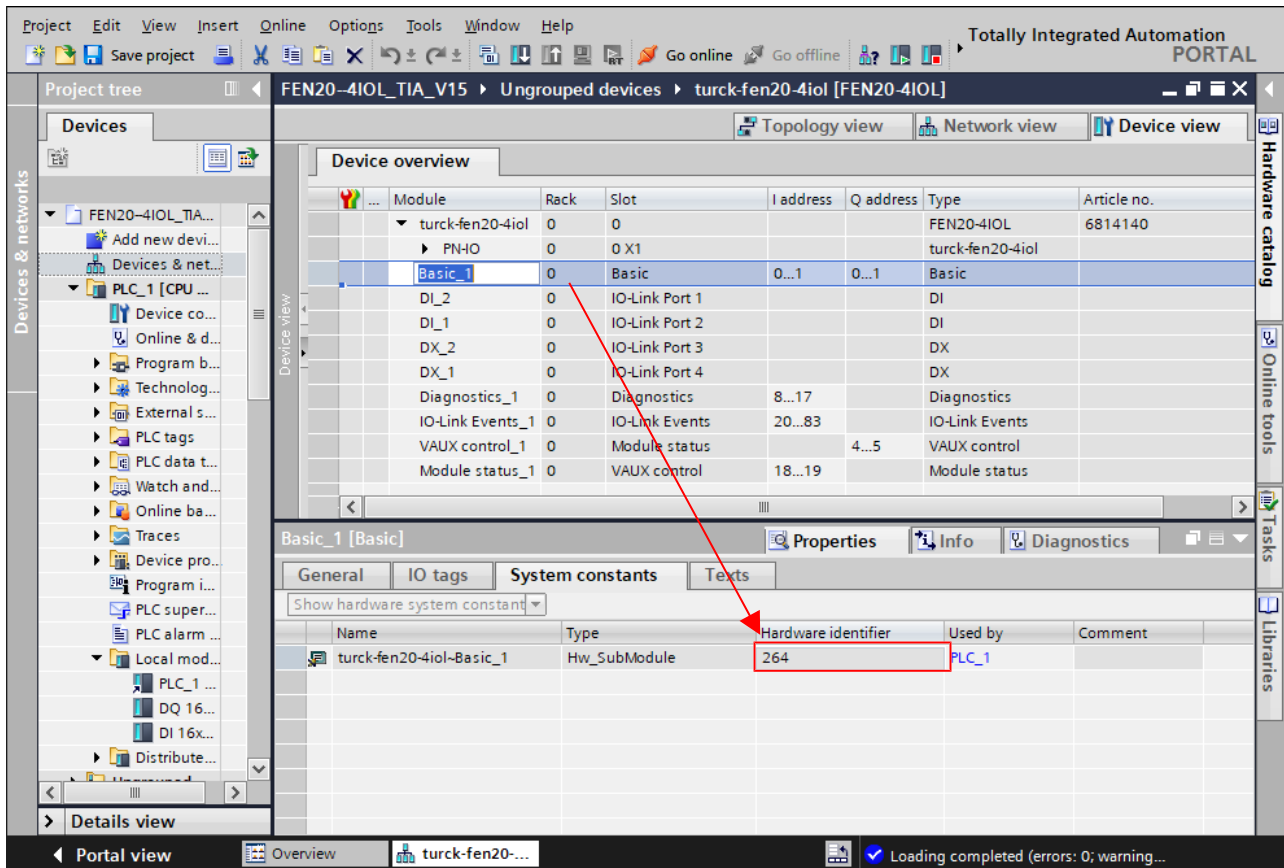


Fig. 33: Hardware identifier: Basic slot of the FEN20-4IOL in the example

Example read access – read product name

Reading out the product name (product name, index 0x12) of the TURCK IO-Link I/O-hub TBIL-M1-16DXP at IO-Link port 4.

- ▶ Write the input variables of the function block via **control variable** as follows:

Variable	Value	Meaning
REQ	TRUE	Send a read request
ID	264	Hardware identifier of the "Basic" slot according to the configuration in the Device view
CAP	251	Function block instance
PORT	4	The I/O hub TBIL-M1-16DXP is connected to port 4.
IOL_INDEX	0x12	Index for product name

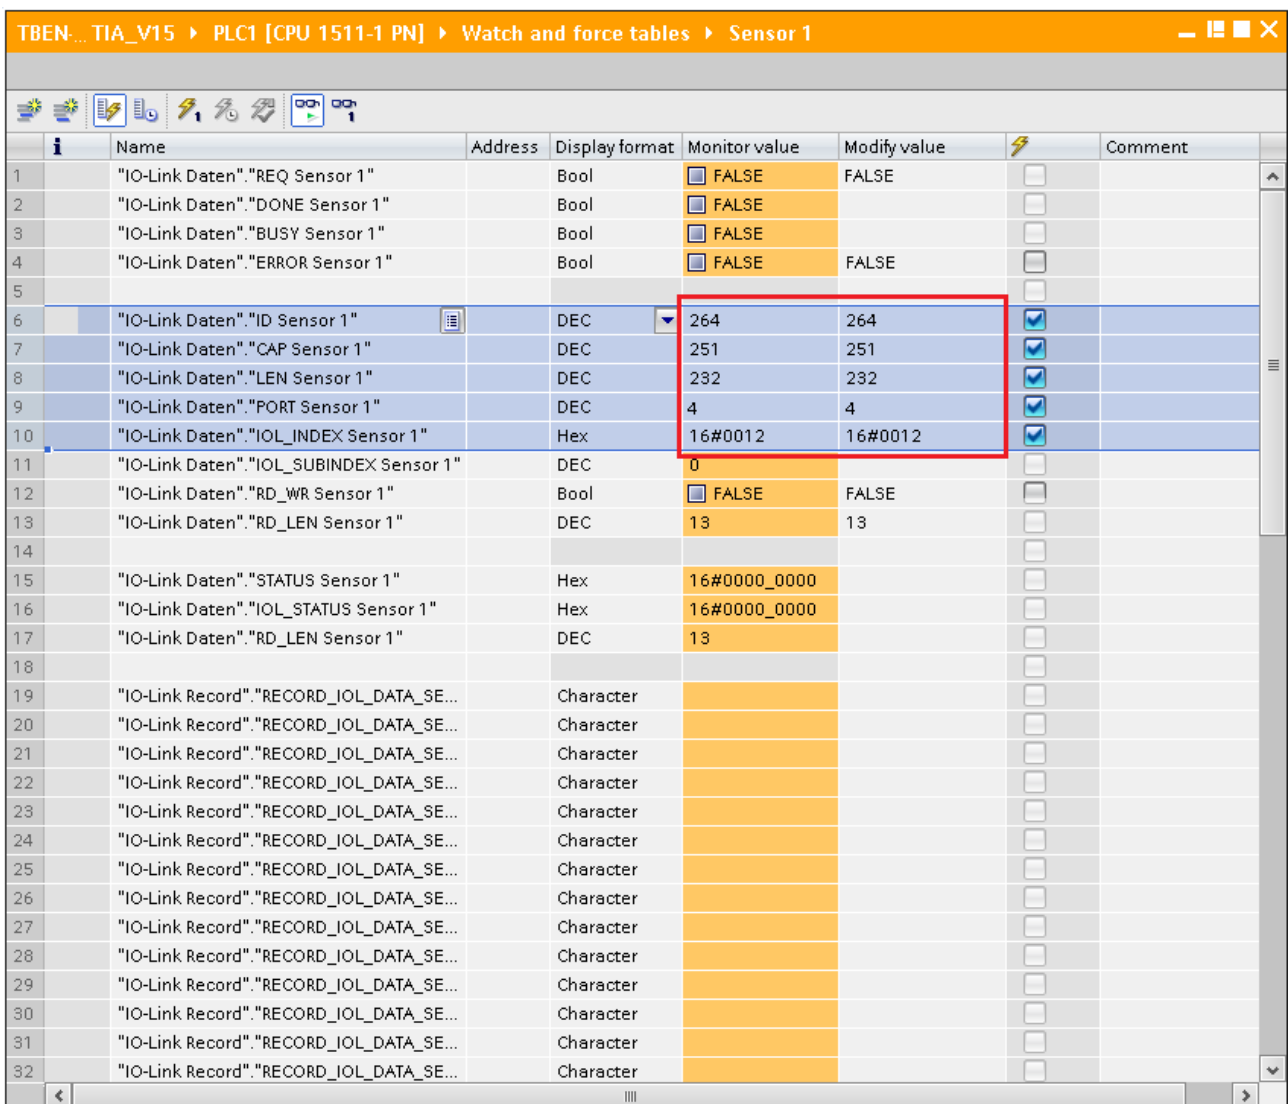


Fig. 34: IO_LINK_DEVICE – input variables for read access

- ▶ Activate the read access via a rising edge at REQ.

	Name	Address	Display format	Monitor value	Modify value		Comment
1	"IO-Link Daten"."REQ Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE	TRUE	<input checked="" type="checkbox"/>	0 => 1 start CALL
2	"IO-Link Daten"."DONE Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE		<input type="checkbox"/>	
3	"IO-Link Daten"."BUSY Sensor 1"		Bool	<input type="checkbox"/> FALSE		<input type="checkbox"/>	
4	"IO-Link Daten"."ERROR Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	
5						<input type="checkbox"/>	
6	"IO-Link Daten"."ID Sensor 1"		DEC	264	264	<input type="checkbox"/>	
7	"IO-Link Daten"."CAP Sensor 1"		DEC	251	251	<input type="checkbox"/>	

Fig. 35: IO_LINK_DEVICE – activate read access

- ⇒ In this example, the result of this request can be seen in the watch table (row 19 and following) in the IO-Link Record.

	Name	Address	Display format	Monitor value	Modify value		Comment
1	"IO-Link Daten"."REQ Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE	TRUE	<input checked="" type="checkbox"/>	0 => 1 start CALL
2	"IO-Link Daten"."DONE Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE		<input type="checkbox"/>	
3	"IO-Link Daten"."BUSY Sensor 1"		Bool	<input type="checkbox"/> FALSE		<input type="checkbox"/>	
4	"IO-Link Daten"."ERROR Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	
5						<input type="checkbox"/>	
6	"IO-Link Daten"."ID Sensor 1"		DEC	264	264	<input type="checkbox"/>	
7	"IO-Link Daten"."CAP Sensor 1"		DEC	251	251	<input type="checkbox"/>	
8	"IO-Link Daten"."LEN Sensor 1"		DEC	232	232	<input type="checkbox"/>	
9	"IO-Link Daten"."PORT Sensor 1"		DEC	4	4	<input type="checkbox"/>	
10	"IO-Link Daten"."IOL_INDEX Sensor 1"		Hex	16#0012	16#0012	<input type="checkbox"/>	
11	"IO-Link Daten"."IOL_SUBINDEX Sensor 1"		DEC	0		<input type="checkbox"/>	
12	"IO-Link Daten"."RD_WR Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	
13	"IO-Link Daten"."RD_LEN Sensor 1"		DEC	13	13	<input checked="" type="checkbox"/>	
14						<input type="checkbox"/>	
15	"IO-Link Daten"."STATUS Sensor 1"		Hex	16#0000_0000		<input type="checkbox"/>	
16	"IO-Link Daten"."IOL_STATUS Sensor 1"		Hex	16#0000_0000		<input type="checkbox"/>	
17	"IO-Link Daten"."RD_LEN Sensor 1"		DEC	13		<input type="checkbox"/>	
18						<input type="checkbox"/>	
19	"IO-Link Record"."RECORD_IOL_DATA..."		Character	'T'	'\$00'	<input type="checkbox"/>	
20	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'B'	'\$00'	<input type="checkbox"/>	
21	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'I'	'\$00'	<input type="checkbox"/>	
22	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'L'	'\$00'	<input type="checkbox"/>	
23	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'.'	'\$00'	<input type="checkbox"/>	
24	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'M'	'\$00'	<input type="checkbox"/>	
25	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'1'	'\$00'	<input type="checkbox"/>	
26	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'1'	'\$00'	<input type="checkbox"/>	
27	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'1'	'\$00'	<input type="checkbox"/>	
28	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'6'	'\$00'	<input type="checkbox"/>	
29	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'D'	'\$00'	<input type="checkbox"/>	
30	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'X'	'\$00'	<input type="checkbox"/>	
31	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	'P'	'\$00'	<input type="checkbox"/>	
32	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Character	16#00	'\$00'	<input type="checkbox"/>	
33	"IO-Link Record"."RECORD_IOL_DATA_SE..."		Hex	16#00		<input type="checkbox"/>	

Fig. 36: IO_LINK_DEVICE – product name TBIL-M1-16DXP

Example access write – rotate display

The display of the Turck temperature sensors TS-500-LUUPN8X-H1141-... at IO-Link port 1 is rotated. The parameter **Measured value update time/rotating/disabling a display** in index 55 is set to 0x05 = 600 ms measured value update time, display rotated by 180°.

Temperature sensors TS series IO-Link Parameters

Specific On-Request Data Objects – Parameter values

Index 0x54; Displayed unit

Value (hexadezcimal)	Menu item	Function
0x00	°C	°C
0x01	°F	°F
0x02	k	k
0x03	Ohm	Ohm

Index 0x55: Measured value update time/rotating/disabling a display

Value (hexadecimal)	Menu item	Function
0x00	50	50 ms measured value update time
0x01	200	200 ms measured value update time
0x02	600	600 ms measured value update time
0x03	r50	50 ms measured value update time, display rotated by 180°
0x04	r200	200 ms measured value update time, display rotated by 180°
0x05	r600	600 ms measured value update time, display rotated by 180°
0x06	OFF	Display disabled

Index 0x56: Behaviour of output 1 in the event of error

Value (hexadecimal)	Menu item	Function
0x00	Fou1	Output off
0x01	Fou2	Output on

Fig. 37: Extract from the documentation for TS-500-...

- ▶ Write the input variables of the function block via **control variable** as follows:
- ▶ Activate the write access in the function block via **RD_WR Sensor 1= TRUE**.

Variable	Value	Meaning
REQ	TRUE	Send a write request
ID	264	Hardware identifier of the Basic slot according to the configuration in the Device view
CAP	251	Function block instance
LEN	1	Length of the data to be written in byte
PORT	1	The temperature sensor TS-500-LUUPN8X-H1141 is connected to port 1.
IOL_INDEX	0x12	Index for Measured value update time/rotating/disabling a display

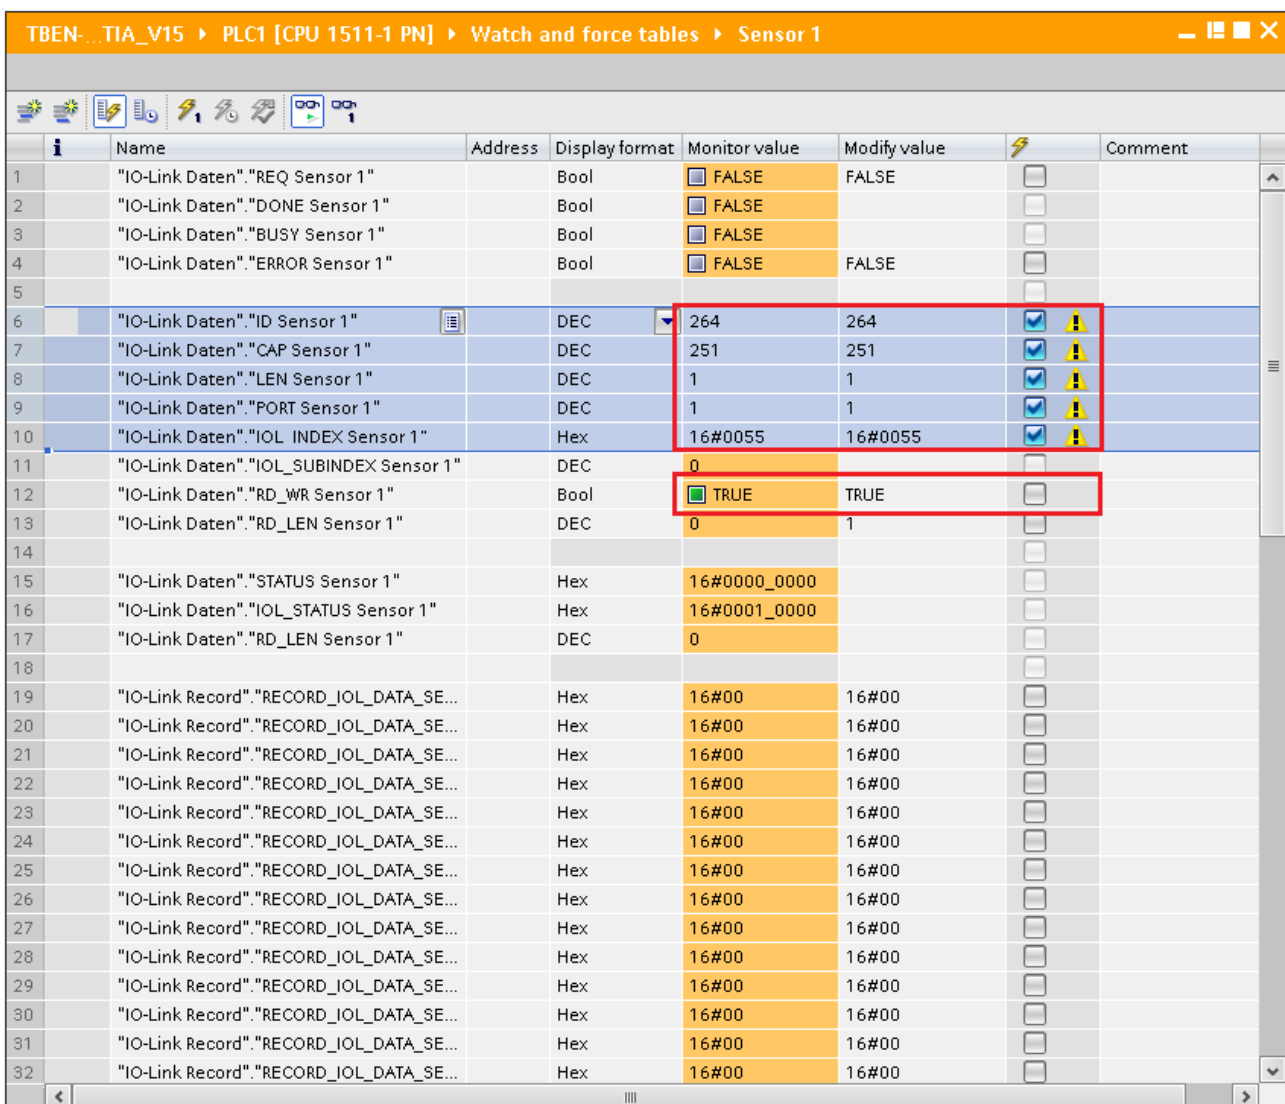


Fig. 38: IO_LINK_DEVICE – input variables for read access

- ▶ Set the value to be written **0x05** via the first word of **IO-Link Record** in the watch table.

	Name	Address	Display format	Monitor value	Modify value		Comment
1	"IO-Link Daten"."REQ Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	0 -> 1 start CALL
2	"IO-Link Daten"."DONE Sensor 1"		Bool	<input type="checkbox"/> FALSE		<input type="checkbox"/>	
3	"IO-Link Daten"."BUSY Sensor 1"		Bool	<input type="checkbox"/> FALSE		<input type="checkbox"/>	
4	"IO-Link Daten"."ERROR Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	
5						<input type="checkbox"/>	
6	"IO-Link Daten"."ID Sensor 1"		DEC	264	264	<input type="checkbox"/>	
7	"IO-Link Daten"."CAP Sensor 1"		DEC	251	251	<input type="checkbox"/>	
8	"IO-Link Daten"."LEN Sensor 1"		DEC	1	1	<input type="checkbox"/>	
9	"IO-Link Daten"."PORT Sensor 1"		DEC	1	1	<input type="checkbox"/>	
10	"IO-Link Daten"."IOL_INDEX Sensor 1"		Hex	16#0055	16#0055	<input type="checkbox"/>	
11	"IO-Link Daten"."IOL_SUBINDEX Sensor 1"		DEC	0		<input type="checkbox"/>	
12	"IO-Link Daten"."RD_WR Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE	TRUE	<input type="checkbox"/>	
13	"IO-Link Daten"."RD_LEN Sensor 1"		DEC	0	1	<input type="checkbox"/>	
14						<input type="checkbox"/>	
15	"IO-Link Daten"."STATUS Sensor 1"		Hex	16#0000_0000		<input type="checkbox"/>	
16	"IO-Link Daten"."IOL_STATUS Sensor 1"		Hex	16#0001_0000		<input type="checkbox"/>	
17	"IO-Link Daten"."RD_LEN Sensor 1"		DEC	0		<input type="checkbox"/>	
18						<input type="checkbox"/>	
19	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#05	16#05	<input checked="" type="checkbox"/> ⚠	
20	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
21	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
22	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
23	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
24	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
25	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
26	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
27	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
28	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
29	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
30	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
31	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	
32	"IO-Link Record"."RECORD_IOL_DATA_SE...		Hex	16#00	16#00	<input type="checkbox"/>	

Fig. 39: IO_LINK_DEVICE – Control value 0x05 for index 0x55

- ▶ Activate the Write access via a rising edge at **REQ**.

	Name	Address	Display format	Monitor value	Modify value		Comment
1	"IO-Link Daten"."REQ Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE	TRUE	<input checked="" type="checkbox"/> ⚠	0 -> 1 start CALL
2	"IO-Link Daten"."DONE Sensor 1"		Bool	<input checked="" type="checkbox"/> TRUE		<input type="checkbox"/>	
3	"IO-Link Daten"."BUSY Sensor 1"		Bool	<input type="checkbox"/> FALSE		<input type="checkbox"/>	
4	"IO-Link Daten"."ERROR Sensor 1"		Bool	<input type="checkbox"/> FALSE	FALSE	<input type="checkbox"/>	
5						<input type="checkbox"/>	
6	"IO-Link Daten"."ID Sensor 1"		DEC	264	264	<input type="checkbox"/>	
7	"IO-Link Daten"."CAP Sensor 1"		DEC	251	251	<input type="checkbox"/>	

Fig. 40: IO_LINK_DEVICE – activate read access

- ⇒ The display is now rotated about 180° and set to an actualization time of 600 ms

8.8 Commissioning the Device in Modbus TCP

8.8.1 Implemented Modbus functions

The devices support the following functions for accessing process data, parameters, diagnostics and other services.

Function Code	
1	Read Coils – reading multiple output bits
2	Read Discrete Inputs – reading multiple input bits
3	Read Holding Registers – reading multiple output registers
4	Read Input Registers – reading multiple input registers
5	Write Single Coil – writing single output bit
6	Write Single Register – writing single output register
15	Write Multiple Coils – writing multiple output bits
16	Write Multiple Registers – writing multiple output
23	Read/Write Multiple Registers – reading and writing multiple registers

8.8.2 Modbus registers

Address	Access	Meaning
0x0000...0x01FF	read only	Process data of the inputs (identical to registers 0x8000...0x8FFF)
0x0800...0x09FF	read/write	Process data of the outputs (identical to registers 0x9000...0x9FFF)
0x1000...0x100B	read only	Module identifier
0x100C	read only	Module status
0x1017	read only	Register mapping revision (always 2, if not, mapping is incompatible with this description)
0x1020	read only	Watchdog, actual time [ms]
0x1120	read/write	Watchdog predefined time [ms] (default: 500 ms)
0x1130	read/write	Modbus connection mode register
0x1131	read/write	Modbus Connection Timeout in sec. (def.: 0 = never)
0x113C...0x113D	read/write	Modbus Parameter Restore (reset of parameters to default values)
0x113E...0x113F	read/write	Modbus Parameter Save (permanent storing of parameters)
0x1140	read/write	Deactivate protocol Deactivates explicitly the selected Ethernet protocol: <ul style="list-style-type: none"> ■ Bit 0 = deactivate EtherNet/IP ■ Bit 1 = deactivate Modbus TCP ■ Bit 2 = deactivate PROFINET ■ Bit 15 = deactivate web server
0x1141	read/write	Active protocol <ul style="list-style-type: none"> ■ Bit 0 = EtherNet/IP active ■ Bit 1 = Modbus TCP active ■ Bit 2 = PROFINET active ■ Bit 15 = Web server active

Address	Access	Meaning
0x1150	read only	LED behavior (PWR) at V2 undervoltage bit 0: 0 = red 1 = green flashing
0x2400	read only	V1 [mV]: 0 at < 18 V
0x2401	read only	V2 [mV]: 0 at < 18 V
0x8000...0x8400	read only	Process data of the inputs (identical to registers 0x0000...0x01FF)
0x9000...0x9400	read/write	Process data of the outputs (identical to registers 0x0800...0x09FF)
0xA000...0xA400F	read only	Diagnostics
0xB000...0xB400	read/write	Parameters

The following table shows the register mapping for the different Modbus addressing methods:

Description	Hex	decimal	5-digit	Modicon
Inputs	0x0000...0x01FF	0...511	40001...40512	400001...400512
Outputs	0x0800...0x09FF	2048...2549	42049...42560	402049...402560
Module identifier	0x1000...0x1006	4096...4102	44097...44103	404097...404103
Module status	0x100C	4108	44109	404109
Watchdog, actual time	0x1020	4128	44129	404129
Watchdog, predefined time	0x1120	4384	44385	404385
Modbus connection mode re- gister	0x1130	4400	44401	404401
Modbus Connection Timeout in sec.	0x1131	4401	44402	404402
Modbus Parameter Restore	0x113C...0x113D	4412...4413	44413...44414	404413...404414
Modbus Parameter Save	0x113E...0x113F	4414...4415	44415...44416	404415...404416
Deactivate protocol	0x1140	4416	44417	404417
Active protocol	0x1141	4417	44418	404418
LED behavior (PWR) at V2 under- voltage	0x1150	4432	44433	404433
V1 [mV]:	0x2400	9216	49217	409217
V2 [mV]:	0x2401	9217	49218	409218
Process data inputs	0x8000, 0x8001	32768, 32769	-	432769, 432770
Process data outputs	0x9000, 0x9001	36864, 36865	-	436865, 436866
Diagnostics	0xA000, 0xA001	40960, 40961	-	440961, 440962
Parameters	0xB000, 0xB001	45056, 45057	-	445057, 445058

Register 0x1130: Modbus connection mode

This register defines the behavior of the Modbus connections.

Bit	Designation	Value	Meaning
0	MB_OnlyOneWritePermis- sion	0	All Modbus connections receive the write au- thorization
		1	Only one Modbus connection can receive the write permission. A write permission is opened until a Disconnect. After the Disconnect the next connection which requests a write access receives the write authorization.
1	MB_ImmediateWritePer- mission	0	With the first write access, a write authoriza- tion for the respective Modbus connection is requested. If this request fails, an exception re- sponse with exception-code 0x01 is gener- ated. If the request is accepted, the write ac- cess is executed and the write authorization remains active until the connection is closed.
		1	The write authorization for the respective Modbus connection is already opened during the connection establishment. The first Mod- bus connection thus receives the write author- ization, all following connections don't (only if bit 0 = 1).
2...15	reserved	-	-

Register 0x1131: Modbus connection timeout

This register defines after which time of inactivity a Modbus connection is closed through a Dis-
connect.

Value range: 0...65535 s

default: 0 s = never (Modbus connection will never be closed)

Behavior of the BUS LED

If Modbus is the active protocol in case of a connection Time out and no further Modbus con-
nections exist, the BUS LED behaves as follows:

Connection timeout	BUS LED
timeout	Green blinking

Register 0x113C and 0x113D: Restore Modbus-Connection-Parameters

Registers 0x113C and 0x113D serve for resetting the parameter-register 0x1120 and 0x1130 to 0x113B to the default settings. The service resets the parameters without saving them.

Procedure:

- ▶ Write 0x6C6F to register 0x113C.
- ▶ To activate the reset of the registers, write 0x6164 ("load") within 30 seconds in register 0x113D. Both registers can also be written with one single request using the function codes FC16 and FC23.
- ⇒ The parameters are reset tot default values.
- ▶ Save changes via a subsequent Save service.

Register 0x113E and 0x113F: Save Modbus-Connection-Parameters

Registers 0x113E and 0x113F are used for the non-volatile saving of parameters in registers 0x1120 and 0x1130 to 0x113B.

Procedure:

- ▶ Write 0x7361 to register 0x113E.
- ▶ Write 0x7665 ("save") within 30 seconds in register 0x113F to activate the reset of the registers. Both registers can also be written with one single request using the function codes FC16 and FC23.
- ⇒ The parameters are saved.

8.8.3 Data width

Module	Process input	Process output	Alignment
TBEN-S2-4IOL	208 byte	132	word by word

8.8.4 Register mapping

Register no.	Bit no.																	
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
	MSB								LSB									
	Input data																	
0x0000... 0x00xx	Process input data [▶ 108]																	
	Module status																	
0x00xx + 1 register	see status- and control word																	
	Output data																	
0x0800... 0x08xx	Process input data Process output data – [▶ 110]																	
	Diagnostics [▶ 113]																	
0xA000	DXP channel diagnostics																	
0xA001	IO-Link channel diagnosis																	
...																		
0xA004																		
	Parameters [▶ 96]																	
	IO-Link-Basic																	
0xB000	-	-	-	-	-	-	-	-	DXP7_ SRO	-	-	DXP5_ SRO	-	-	DXP3_ SRO	-	-	DXP1_ SRO
0xB001	-	-	-	-	-	-	-	-	DXP7_ EN DO	-	-	DXP5_ EN DO	-	-	DXP3_ EN DO	-	-	DXP1_ EN DO
	IO-Link port 1																	
0xB002	Cycle time								GSD	Activate quick start-up	Data Storage Mode	Operation mode						
0xB003	-	-	-	-	-	-	-	-	Mapping PCDO		Mapping PDIN	Deactivate diagnostics		PDIN invalid	Rev.			
0xB004... 0xB005	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
0xB006	Vendor ID																	
0xB007 ... 0xB008	Device ID																	
0xB009	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
	IO-Link port 2																	
0xB00A... 0xB011	8 registers parameter data, assignment similar to port 1																	
	IO-Link port 3																	
0xB0012... 0xB019	8 registers parameter data, assignment similar to port 1																	
	IO-Link port 4																	
0xB01A... 0xB021	8 registers parameter data, assignment similar to port 1																	

8.8.5 Error Behavior (watchdog)

Behavior of outputs

In case of a failure of the Modbus communication, the outputs' behavior is as follows, depending on the defined time for the Watchdog (register 0x1120):

Watchdog	Behavior of outputs
0 ms	All outputs maintain the actual value in case of an error
> 0 ms (default = 500 ms)	Outputs switch to 0 after the watchdog time has expired (setting in register 0x1120).



NOTE

Setting the outputs to predefined substitute values is not possible in Modbus TCP. Eventually parameterized substitute values will not be used.

Behavior of the BUS LED

If the watchdog triggers, the BUS LED behaves as follows:

Watchdog	BUS LED
Tripped	Red

Behavior of the device in case of loss of Modbus communication

If Modbus is the active protocol and all Modbus connections are closed, the watchdog switches all outputs to "0" after the watchdog time has expired, unless another protocol (PROFINET, EtherNet/IP) has been activated in the meantime.

8.9 Commissioning the device in EtherNet/IP

8.9.1 Common EtherNet/IP features

Features	Description
QuickConnect	No
Device Level Ring (DLR)	yes
Number of TCP connections	3
Number of CIP connections	10
Input assembly instance	103, 120, 121, 122, 123, 124, 125
Output assembly instance	104, 150, 151, 152
Configuration assembly Instance	106

8.9.2 EDS files and catalog files

The ARGEE FLC programming software can be downloaded free of charge from www.turck.com.

- FEN20_ETHERNETIP.zip

8.9.3 Device Level Ring (DLR)

The devices support DLR. The Device Level Ring (DLR)-redundancy protocol is used to increase the stability of EtherNet/IP networks. DLR-enabled devices have an integrated switch and can thus be integrated into a ring topology. The DLR protocol is used to detect an interruption in the ring. If the data line is interrupted, data are sent through an alternative network section, so that the network can be reconfigured as soon as possible. DLR-capable network nodes are provided with extended diagnostic functions which enable the devices to localize errors and thus decrease the time for error search and maintenance.

8.9.4 Diagnostic messages via process data

The diagnostic messages of the IO-Link-channels are directly mapped into the process data [► 108].

Additionally, the device's status word contains the module diagnostics:

Byte 1 (MSB)								Byte 0 (LSB)							
Bit 15	Bit 14	Bit 13	Bit 12	Bit 11	Bit 10	Bit 9	Bit 8	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	AR-GEE	DIAG

8.9.5 EtherNet/IP standard classes

The modules support the following EtherNet/IP Standard Classes in accordance with the CIP specification.

Class Code		Object name
Dec.	Hex.	
01	0x01	Identity Object [► 57]
04	0x04	Assembly Object [► 59]
06	0x06	Connection Manager Object [► 72]
245	0xF5	TCP/IP Interface Object [► 73]
246	0xF6	Ethernet Link Object [► 76]

Identity Object (0x01)

The following description of the Ethernet Link Object is taken from the CIP specification, Vol. 2, Rev. 2.1 by ODVA & ControlNet International Ltd. and adapted to the Turck products.

Instance attributes

Attr. no.	Attribute name	Get/set	Type	Value
Dec.	Hex.			
1	0x01	Vendor ID	G	UINT Contains the manufacturer ID. Turck = 0x46
2	0x02	Product type	G	UINT Shows the general product type. Communications Adapter 12 _{dez} = 0x0C
3	0x03	Product code	G	UINT Identifies a special product in a device type. default: 27247 _{dec} = 6A6F

Attr. no.	Attribute name	Get/set	Type	Value
Dec.	Hex.			
4	0x04	G	STRUCT OF: ■ Major ■ Minor	Revision of the device which is represented by the Identity Object. ■ 0x01 ■ 0x06
5	0x05	G	WORD	WORD
6	0x06	G	UDINT	Contains the identification number of the product (the last 3 bytes of the MAC-ID).
7	0x07	G	STRUCT OF: USINT STRING [13]	i.e.: TBEN-S2-4IOL

Device Status

Bit	Name	Definition
0...1	reserved	default = 0
2	Configured	TRUE = 1: The application in the device has been configured (default setting).
3	reserved	default = 0
4...7	Extended Device Status	0011 = no I/O connection established 0110 = at least one I/O connection in RUN mode 0111 = at least one I/O connection established, all in IDLE mode All other settings = reserved
8	Minor recoverable fault	Recoverable fault, e.g.: ■ Undervoltage ■ Force-Mode in DTM active ■ Diagnostic active at I/O channel
9...10	reserved	
11	Diag	Common error bit
12...15	reserved	default = 0

Common services

Service code	Class	Instance	Service name
Dec.	Hex.		
1	0x01	Yes	Get_Attribute_All returns a predefined list of object attributes
5	0x05	No	reset starts the reset service for the device
14	0x0E	Yes	Get_Attribute_Single returns the content of a specified attribute
16	0x10	No	Set_Attribute_Single changes a single attribute

Assembly Object (0x04)

Assembly Objects bind attributes of multiple objects to allow data to or from each object to be sent or received over a single connection.

The following description of the Ethernet Link Object is taken from the CIP specification, Vol. 2, Rev. 2.1 by ODVA & ControlNet International Ltd. and adapted to the Turck products.

Class attributes

Attr. no.	Attribute name	Get/set	Type	Value	
Dec.	Hex.				
1	0x01	Revision	G	UINT	2
2	0x02	Max. object instance	G	UINT	104

Instance Attributes

Attr. no.	Attribute name	Get/set	Type	Value	
Dec.	Hex.				
3	0x03	Data	S	ARRAY OF BYTE	identifies a special product in a device type default: 27247dec = 6A6F
4	0x04	Size	G	UINT	Number of bytes in attribute 3: 256 or variable

Common services

Service code	Class	Instance	Service name	
Dec.	Hex.			
1	0x01	Yes	Yes	Get_Attribute_All returns a predefined list of object attributes
14	0x0E	Yes	Yes	Get_Attribute_Single returns the content of a specified attribute

Assembly instances

EtherNet/IP connection	Input Assembly		Output Assembly		Configuration Assembly		Supported by	
	Instance	Size [8 bit]	Instance	Size [8 bit]	Instance	Size [8 bit]	Rockwell	Omron
Exclusive Owner	103	206	104	134	106	172	x	-
Exclusive Owner (Omron)	103	206	104	134	1	0	-	x
IOL 4 IN/4 OUT, diagnostics	120	30	150	22	106	172	x	x
IOL 6 IN/6 OUT, diagnostics	122	38	151	30	106	172	x	x
IOL 8 IN/8 OUT, diagnostics	124	46	152	38	106	172	x	x
IOL 4 IN/4 OUT	121	20	150	22	106	172	x	x
IOL 6 IN/6 OUT	123	28	151	30	106	172	x	x
IOL 8 IN/8 OUT	125	36	152	38	106	172	x	x

Configuration assembly (instance 106)

The modules support Configuration Assembly.

The Configuration Assembly contains:

10 bytes module configuration data (EtherNet/IP-specific)

+ 72 bytes (parameter data, depending on device)

The meaning of the input data can be found in chapter “Parameterizing and configuring”.

Byte no.		Bit no.								
Dec.	Hex.	7	6	5	4	3	2	1	0	
Device Configuration Data										
0...8	0x00...0x08	-	-	-	-	-	-	-	-	-
9	0x09	-	-	-	-	-	Eth2 port setup	Eth1 port setup	QuickConnect (not supported)	
DXP channels										
10	0x0A	-	-	-	-	-	-	-	DX0_SRO	
11	0x0B	-	-	-	-	-	-	-	DX1_SRO	
12	0x0C	-	-	-	-	-	-	-	DX2_SRO	
13	0x0D	-	-	-	-	-	-	-	DX3_SRO	
14	0x0E	-	-	-	-	-	-	-	DX0_EN DO	
15	0x0F	-	-	-	-	-	-	-	DX1_EN DO	
16	0x10	-	-	-	-	-	-	-	DX2_EN DO	
17	0x11	-	-	-	-	-	-	-	DX3_EN DO	
IO-Link port parameters										
		IO-Link port 1								
18	0x12	-	-	-	-	Operation mode				
19	0x13	-	-	-	-	-	-	Data storage mode		
20	0x14	Cycle time								
21	0x15	-	-	-	-	-	-	-	Revision	
22	0x16	-	-	-	-	-	-	-	Quick Start-Up	
23	0x17	-	-	-	-	-	-	-	GSD	
24	0x18	-	-	-	-	-	-	-	PDIN invalid	
25	0x19	-	-	-	-	-	-	-	Deactivate diagnostics	
26	0x1A	-	-	-	-	-	-	Mapping PDIN		
27	0x1B	-	-	-	-	-	-	Mapping PDOOUT		
28...29	0x1C...0x1D	Vendor ID								
30...33	0x1E...0x21	Device ID								
34...49	0x22...0x31	IO-Link port 2								
50...65	0x32...0x41	IO-Link port 3								
66...81	0x42...0x51	IO-Link port 4								
82	0x52	-	-	-	-	-	-	VAUX1 pin3		
83	0x53	-	-	-	-	-	-	VAUX1 pin5		
84	0x54	-	-	-	-	-	-	VAUX1 pin7		
85	0x55	-	-	-	-	-	-	VAUX1 pin9		

Device configuration data

Parameter name	Value		Meaning
LED-behavior (PWR) at V2 undervoltage	0	Red	PWR-LED constant red at V2 undervoltage.
	1	green	PWR-LED is blinking green at V2 undervoltage.
ETH x Port Setup	0	Auto negotiation	The port is set to autonegotiation.
	1	100BT/FD	Fix setting of the communication parameters for the Ethernet port to: <ul style="list-style-type: none"> ■ 100BaseT ■ Full duplex

Input assembly instances

EtherNet/IP Connection	Input Assembly		Device status [byte]	Basic I/O [byte]	IO-Link inputs [byte]	Diagnostics [byte]	Event data (byte)
	Instance	Size [8 bit]					
Exclusive Owner	103	208	2	4	128	10	64
Exclusive Owner (Omron)	103	208	2	4	128	10	64
IOL 4 IN/4 OUT, diagnostics	120	32	2	4	16	10	0
IOL 6 IN/6 OUT, diagnostics	122	40	2	4	24	10	0
IOL 8 IN/8 OUT, diagnostics	124	48	2	4	32	10	0
IOL 4 IN/4 OUT	121	22	2	4	16	0	0
IOL 6 IN/6 OUT	123	30	2	4	24	0	0
IOL 8 IN/8 OUT	125	38	2	4	32	0	0

Instance 103 – Exclusive Owner

The description of the parameters can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid																
Inputs																
0x01	-	-	-	-	DV S3	DV S2	DVS1	DVS0	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x11	16 words per port															
0x12... 0x21																
0x22... 0x31																
0x32... 0x41																
Diagnostics																
DXP channels																
0x42	-	-	-	-	ERR DX 3	ERR DX 2	ERR DX1	ERR DX0	-	-	-	-	ERR VAUX1 Ch3	ERR VAU X1 Ch2	ERR VAUX1 Ch1	ERR VAU X1 Ch0
IO-Link port diagnostics																
Port 1																
0x43	GE N ERR	OV L	V HIG H	V LO W	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-
...																
Port 4																
0x46	GE N ERR	OV L	V HIG H	V LO W	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-
IO-Link Events																
0x47	Port (1st Event)								Qualifier (1st Event)							
0x48	Event Code low byte (1st Event)								Event Code high byte (1st Event)							
...																
0x65	Port 16th Event)								Qualifier (16th Event)							
0x66	Event Code low byte (16th Event)								Event Code high byte (16th Event)							

Instance 120 – 4 byte IN/4 byte OUT, diagnostics

The description of the parameters can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid								Inputs								
0x01	-	-	-	-	DV S3	DV S2	DVS1	DVS0	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x03	2 words per port															
0x04... 0x05																
0x06... 0x07																
0x08... 0x09																
Diagnostics																
DXP channels																
0x0A	-	-	-	-	ERR DX 3	ERR DX 2	ERR DX1	ERR DX0	-	-	-	-	ERR VAUX1 Ch3	ERR VAUX1 Ch2	ERR VAUX1 Ch1	ERR VAUX1 Ch0
IO-Link port diagnostics																
Port 1																
0x0B	GE N ERR	OV L	V HIGH	V LOW	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-
...																
Port 4																
0x0E	GE N ERR	OV L	V HIGH	V LOW	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-

Instance 121 – 4 byte IN/4 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid								Inputs								
0x01	-	-	-	-	DV S3	DV S2	DVS1	DVS0	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x03	2 words per port															
0x04... 0x05																
0x06... 0x07																
0x08... 0x09																

Instance 122 – 6 byte IN/6 byte OUT, diagnostics

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid								Inputs								
0x01	-	-	-	-	DV S3	DV S2	DVS1	DVS0	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x04	3 words per port															
0x05... 0x07																
0x08... 0x0A																
0x0B... 0x0D																
Diagnostics																
DXP channels																
0x0E	-	-	-	-	ERR DX 3	ERR DX 2	ERR DX1	ERR DX0	-	-	-	-	ERR VAUX1 Ch3	ERR VAUX1 Ch2	ERR VAUX1 Ch1	ERR VAUX1 Ch0
IO-Link port diagnostics																
Port 1																
0x0F	GE N ERR	OV L	V HIGH	V LOW	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-
...																
Port 4																
0x13	GE N ERR	OV L	V HIGH	V LOW	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-

Instance 123 – 6 byte IN/6 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid								Inputs								
0x01	-	-	-	-	DV S3	DV S2	DVS1-	DVS0-	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x04	3 words per port															
0x05... 0x07																
0x08... 0x0A																
0x0B... 0x0D																

Instance 124 – 8 byte IN/8 byte OUT, diagnostics

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid								Inputs								
0x01	-	-	-	-	DV S3	DV S2	DVS1-	DVS0-	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x05	4 words per port															
0x06... 0x09																
0x0A... 0x0D																
0x0E... 0x11																
Diagnostics																
DXP channels																
0x12	-	-	-	-	ERR DX 3	ERR DX 2	ERR DX1	ERR DX0	-	-	-	-	ERR VAUX1 Ch3	ERR VAU X1 Ch2	ERR VAUX1 Ch1	ERR VAU X1 Ch0
IO-Link port diagnostics																
Port 1																
0x13	GE N ERR	OV L	V HIG H	V LO W	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-
...																
Port 4																
0x16	GE N ERR	OV L	V HIG H	V LO W	UL VE	LLV U	O TMP	PRM ERR	EVT1	EVT2	PD INV	HW ERR	DS ERR	CFG ERR	PPR	-

Instance 125 – 8 byte IN/8 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 108]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Status word [▶ 112]																
0x00	-	FCE	-	-	-	-	V1	-	-	-	-	-	-	-	ARGEE	DIAG
Process input data valid									Inputs							
0x01	-	-	-	-	DV S3	DV S2	DVS1-	DVS0-	-	-	-	-	DI3 (SIO)	DI2 (SIO)	DI1 (SIO)	DI0 (SIO)
IO-Link process input data																
0x02... 0x05	4 words per port															
0x06... 0x09																
0x0A... 0x0D																
0x0E... 0x11																

Output Assembly Instances

EtherNet/IP Connection	Output Assembly		Control word [byte]	DXP outputs [byte]	IO-Link outputs [byte]	VAUX [byte]
	Instance	Size [8 bit]				
Exclusive Owner	104	134	2	2	128	2
IOL 4 IN/4 OUT	150	22	2	2	16	2
IOL 6 IN/6 OUT	151	30	2	2	24	2
IOL 8 IN/8 OUT	152	38	2	2	32	

Instance 104 – Exclusive Owner

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 110]

Word no.	Bit no.																
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Control Word																	
0x00	-	reserved															
DXP outputs																	
0x01	-	-	-	-	-	-	-	-	-	-	-	-	-	DX3	DX2	DX1	DX0
IO-Link process output data																	
0x02... 0x11	16 words per port																
0x12... 0x21																	
0x22... 0x31																	
0x32... 0x41																	
VAUX Control																	
0x42	reserved								-	-	-	-	VAUX pin9	VAUX pin7	VAUX pin5	VAUX pin9	

Instance 150 – 4 byte IN/4 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 110]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Control Word																
0x00	-	reserved														
DXP outputs																
0x01	-	-	-	-	-	-	-	-	DX P7	-	DX P5	-	DXP3	-	DXP1	-
IO-Link process output data																
0x02... 0x03	2 words per port															
0x04... 0x05																
0x06... 0x07																
0x08... 0x09																
VAUX Control																
0x0A	reserved							-	-	-	-	VAUX pin9	VAUX pin7	VAUX pin5	VAUX pin9	

Instance 151 – 6 byte IN/6 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 110]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Control Word																
0x00	-	reserved														
DXP outputs																
0x01	-	-	-	-	-	-	-	-	DX P7	-	DX P5	-	DXP3	-	DXP1	-
IO-Link process output data																
0x02... 0x04	3 words per port															
0x05... 0x07																
0x08... 0x0A																
0x0B... 0x0D																
VAUX Control																
0x0E	reserved							-	-	-	-	VAUX pin9	VAUX pin7	VAUX pin5	VAUX pin9	

Instance 152 – 8 byte IN/8 byte OUT

The description of the input data can be found in chapter “Parameterizing and configuring” [▶ 110]

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Control Word																
0x00	-	reserved														
DXP outputs																
0x01	-	-	-	-	-	-	-	-	DX P7	-	DX P5	-	DXP3	-	DXP1	-
IO-Link process output data																
0x02... 0x05	4 words per port															
0x06... 0x09																
0x0A... 0x0D																
0x0E... 0x11																
VAUX Control																
0x12	reserved							-	-	-	-	VAUX pin9	VAUX pin7	VAUX pin5	VAUX pin9	

Connection Manager Object (0x05)

This object is used for connection and connectionless communications, including establishing connections across multiple subnets.

The following description of the Ethernet Link Object is taken from the CIP specification, Vol. 2, Rev. 2.1 by ODVA & ControlNet International Ltd. and adapted to the Turck products.

Common services

Service code		Class	Instance	Meaning
Dec.	Hex.			
84	0x54	no	yes	FWD_OPEN_CMD (opens a connection)
78	0x4E	no	yes	FWD_CLOSE_CMD (closes a connection)
82	0x52	no	yes	UNCONNECTED_SEND_CMD

TCP/IP Interface Object (0xF5)

The following description of the Ethernet Link Object is taken from the CIP specification, Vol. 2, Rev. 1.1 by ODVA & ControlNet International Ltd. and adapted to the Turck products.

Class attributes

Attr. no. Dec.	Hex.	Designation	Get/set	Type	Value
1	0x01	Revision	G	UINT	1
2	0x02	Max. object instance	G	UINT	1
3	0x03	Number of instances	G	UINT	1
6	0x06	Max. class identifier	G	UINT	7
7	0x07	Max. instance attribute	G	UINT	6

Instance Attributes

Attr. no. Dec.	Hex.	Designation	Get/set	Type	Value
1	0x01	Status	G	DWORD	Interface status
2	0x02	Configuration capability	G	DWORD	Interface Capability Flag
3	0x03	Configuration control	G/S	DWORD	Interface Control Flag
4	0x04	Physical link object	G	STRUCT	
		Path size		UINT	Number of 16 bit words: 0x02
		Path		Padded EPATH	0x20, 0xF6, 0x24, 0x01
5	0x05	Interface configuration	G	Structure of:	TCP/IP Network Interface Configuration
		IP address	G	UDINT	Actual IP address
		Network mask	G	UDINT	Actual network mask
		Gateway addr.	G	UDINT	Actual default gateway
		Name server	G	UDINT	0 = no server address configured
		Name server 2	G	UDINT	0 = no server address configured for server 2
Domain name	G	UDINT	0 = no domain name configured		
6	0x06	Host name	G	String	0 = no host name configured
12	0x0C	QuickConnect	G/S	BOOL	0 = deactivate 1 = activate

Common services

Service code		Class	Instance	Meaning
Dec.	Hex.			
1	0x01	Yes	Yes	Get_Attribute_All
2	0x02	No	No	Set_Attribute_All
14	0x0E	Yes	Yes	Get_Attribute_Single
16	0x10	No	Yes	Set_Attribute_Single

Interface status

This status attribute shows the status of the TCP/IP network interface. Refer to the TCP/IP Object Status Diagram for details on the states of this status attribute.

Bit	Designation	Meaning
0...3	Interface Configuration Status	Indicates the status of the Interface Configuration attribute: 0 = The Interface Configuration attribute has not been configured 1 = The Interface Configuration attribute contains valid configuration. 2...15 = reserved
4...31	reserved	

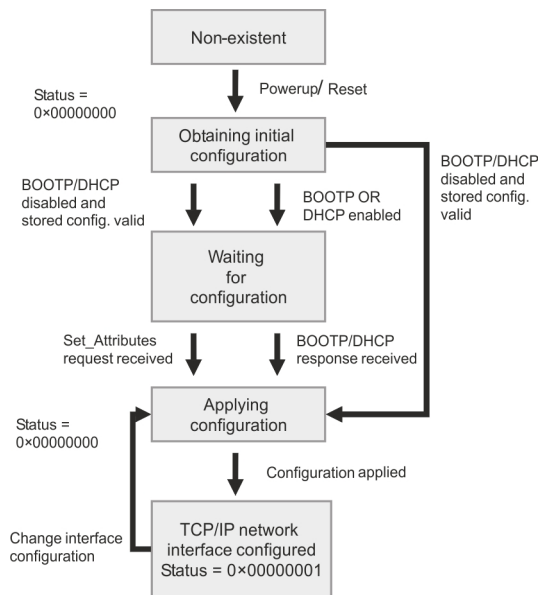


Fig. 41: TCP/IP object state diagram (acc. to CIP Spec., Vol.2, Rev. 1.1)

Configuration capability

The Configuration Capability indicates the device’s support for optional network configuration capability.

Bit	Designation	Meaning	Value
0	BOOTP client	This device supports network configuration via BOOTP.	1
1	DNS client	The device is capable of resolving host names by querying a DNS server.	0
2	DHCP client	This device supports network configuration via BOOTP.	1

Configuration control

The Configuration Control attribute is used to control network configuration options.

Bit	Designation	Meaning
0...3	Startup configuration	Determines how the device shall obtain its initial configuration. The device should use the previously stored interface configuration (for example, from non-volatile memory, set by hardware switch, etc.). 1...3 = reserved
4	DNS enable	Always 0
5...31	reserved	Set to 0

Interface configuration

This attribute contains the configuration parameters required to operate a TCP/IP device.

To change this attribute, proceed as follows:

- ▶ Read out the attribute.
- ▶ Change the parameters.
- ▶ Set the attribute.
- ⇒ The TCP/IP Interface Object applies the new configuration upon completion of the Set service. If the value of the Startup Configuration bits (Configuration Control attribute) is 0, the new configuration is stored in non-volatile memory.

The device does not reply to the set service until the values are safely stored to non-volatile memory.

An attempt to set any of the components of the Interface Configuration attribute to invalid values results in an error (status code 0x09) returned from the Set service. If initial configuration is obtained via BOOTP or DHCP, the Interface Configuration attribute components are all 0 until the BOOTP or DHCP reply is received. Upon receipt of the BOOTP or DHCP reply, the Interface Configuration attribute shows the configuration obtained via BOOTP/DHCP.

Host Name

The attribute contains the name of the device host. The host name attribute is used when the device supports the DHCP-DNS Update capability and has been configured to use DHCP upon start up. This mechanism allows the DHCP client to forward its host name to the DHCP servers. The DHCP server then updates the DNS data for the client.

Ethernet Link Object (0xF6)

The following description of the Ethernet Link Object is taken from the CIP specification, Vol. 2, Rev. 1.1 by ODVA & ControlNet International Ltd. and adapted to the Turck products.

Class attributes

Attr.-no. Dec.	Hex.	Designation	Get/Set	Type	Value
1	0x01	Revision	G	UINT	1
2	0x02	Max. object instance	G	UINT	1
3	0x03	Number of instances	G	UINT	1
6	0x06	Max. class identifier	G	UINT	7
7	0x07	Max. instance attribute	G	UINT	6

Instance attributes

Attr.-no. Dec.	Hex.	Designation	Get/Set	Type	Value
1	0x01	Interface speed	G	UDINT	Speed in megabit per second (e.g. (z. B. 10, 100, 1000 etc.)
2	0x02	Interface flags	G	DWORD	Interface capability flag
3	0x03	Physical address	G	ARRAY OF USINT	Contains the interface's MAC address (Turck: 00:07:46:xx:xx:xx)
6	0x06	Interface control	G	2 WORD	Allows port-wise changes of the Ethernet-settings
7	0x07	Interface type	G		
10	0x0A	Interface label	G		

Interface flags

Bit	Designation	Meaning	Default value
0	Link status	Indicates whether or not the Ethernet communications interface is connected to an active network. 0 = inactive link 1 = active link	Depends on application
1	Half/full duplex	0 = Half duplex 1 = Full duplex If the Link Status flag is 0, the value of the Half/Full Duplex flag is indeterminate.	Depends on application
2...4	Negotiation status	Indicates the status of the automatic autonegotiation 0 = autonegotiation in progress 1 = autonegotiation and speed detection failed, Using default values for speed and duplex (10Mbps/half duplex). 2 = auto-negotiation failed but detected speed (default: half duplex). 3 = successfully negotiated speed and duplex 4 = Autonegotiation not started, yet Forced speed and duplex.	Depends on application

Bit	Designation	Meaning	Default value
5	Manual setting requires reset	0 = interface can activate changes to link parameters (auto-negotiate, duplex mode, interface speed) automatically 1 = device requires a Reset service to be issued to its Identity Object in order to adapt the changes.	0
6	Local Hardware Fault	0 = interface detects no local hardware fault 1 = local hardware error detected	0

Common services

Service code		Class	Instance	Meaning
Dec.	Hex.			
1	0x01	yes	yes	Get_Attribute_All
14	0x0E	yes	yes	Get_Attribute_Single
76	0x4C	No	yes	Enetlink_Get_and_Clear

8.9.6 VSC-Vendor Specific Classes

In addition to supporting the above named CIP Standard Classes, the device support the vendor specific classes (VSCs) described in the following.

Class Code		Name	Description
dec.	Hex.		
100	0x64	Gateway Class [▶ 78]	Data and parameters for the field bus specific part of the device.
103	0x67	IO-Link Parameter Object [▶ 79]	ISDU object for acyclic transmission of parameter data between IO-Link master and IO-Link device
138	0x8A	IO-Link Events Class [▶ 83]	IO-Link Events
179	0xB3	IO-Link Port Class [▶ 84]	Parameters and diagnostics of the IO-Link channels
180	0xB4	Basic Class [▶ 86]	Parameters and diagnostics of the digital channels channels
181	0xB5	VAUX Control [▶ 87]	Parameters and diagnostics for VAUX

Gateway Class (VSC 100)

This class contains all information concerning the whole device.

Object Instance 2, Gateway Instance

Attr. no. Dec.	Hex.	Designation	Get/set	Type	Meaning
109	0x6D	Status word (status register 2)	G	STRUCT	The status word contains general module status information.
115	0x73	On IO connection timeout	G/S	ENUM USINT	Reaction when the time limit for an I/O connection is exceeded: 0: SWITCH IO FAULTED (0): The channels are switched to the substitute value. 1: SWITCH IO OFF (1): The outputs are set to 0. 2: SWITCH IO HOLD (2): No further changes to I/O data. The outputs are held.
138	0x8A	GW status word	G/S	DWORD	Activates or deactivates the mapping of the status word into the device's input data.
139	0x8B	GW control word	G/S	DWORD	Activates or deactivates the mapping of the control word into the device's output data.
140	0x8C	Disable Protocols	G/S	UINT	Deactivation of the used Ethernet protocol. Bit 0: Deactivates EtherNet/IP (cannot be deactivated via the EtherNet/IP interface). Bit 1: Deactivates Modbus TCP Bit 2: Deactivates PROFINET Bit 15: Deactivates the web server

IO-Link Parameter Object (VSC 103)

The IO-Link Parameter Object enables the acyclic transfer of parameter data between the IO-Link master and the IO-Link device.

Instance 1 of the object addresses the IO-Link master

The instance attribute numbers address the IO-Link port at the IO-Link master or the port 0 functions of the IO-Link master.

- 1...n: IO-Link port at IO-Link master, n = number of IO-Link ports at IO-Link master
- 128: Port-0 functions of the IO-Link master

Instance attributes

Common services

Service code	Class	Instance	Service name	
Dec.	Hex.			
14	0x0E	Yes	No	Get_Attribute_Single Returns the content of a specified attribute.
75	0x4B	No	yes	Read_ISDU The service reads parameters from the connected IO-Link device.
76	0x4C	No	yes	Write_ISDU The service writes parameters from the connected IO-Link device.

Read_ISDU - Request

Data	Value/content	Description
Class	0x67	IO-Link Parameter Object
Instance	0x01	Addressing the IO-Link master
Instance attribute	0x01...n, 128	IO-Link port number, or 128 for Port-0 functions
Service code	0x4B	Read_ISDU
Data	Request parameters for the ISDU Read Service	
	Name	Data type Description
Data byte 0	Index (LSB)	UINT LSB from index of the IO-Link ISDU object acc. to IODD
Data byte 1	Index (MSB)	UINT MSB from index of the IO-Link ISDU object acc. to IODD
Data byte 2	Sub index	USINT Sub index from the IO-Link ISDU object acc. to IODD

Read_ISDU – Response

- CIP Service Response, General-Status $\neq 0$ → error-free access
structure of the response:

Name	Data type	Description
ISDU data	Array of Byte	Read data, max. 232 byte

- CIP Service Response, General-Status $\neq 0$ → access error
structure of the response:

Name	Data type	Description
IOL_Master Error	UINT	IO-Link master specific, see IO-Link master Error Codes
IOL_Device Error	UINT	IO-Link device specific, see IO-Link device Error Codes and device documentation

Example:

Read access – name of device at port 4 is read out

Data	Value/content	Description
Class	0x67	IO-Link Parameter Object
Instance	0x01	Addressing the IO-Link master
Instance attribute	0x04	IO-Link port number
Service code	0x4B	Read_ISDU: read access
Data	Request parameters for the ISDU Read Service	
	Name	Data type Description
Data byte 0	0x12	UINT Index for the product name in the device (e.g. Turck I/O hub TBIL-M1-16DXP) according to IODD
Data byte 1	0x00	UINT -
Data byte 2	0x00	USINT The index has no sub index.

- CIP Service Response:

Name	Data type	Description
ISDU data	Array of Byte	Error-free access: Content: 54 42 49 4C 2D 4D 31 2D 31 36 44 58 50 (TBIL-M1-16DXP) Access error: Content: Error code

Write_ISDU – Request

Data	Value/content	Description	
Class	0x67	IO-Link Parameter Object	
Instance	0x01	Addressing the IO-Link master	
Instance attribute	0x01...n, 128	IO-Link port number, or 128 for Port-0 functions	
Service code	0x4C	Write_ISDU	
Data	Request parameters for the ISDU write service		
	Name	Data type	Description
Data byte 0	Index (LSB)	UINT	LSB from index of the IO-Link ISDU object acc. to IODD
Data byte 1	Index (MSB)	UINT	MSB from index of the IO-Link ISDU object acc. to IODD
Data byte 2	Sub index	USINT	Sub index from the IO-Link ISDU object acc. to IODD
Data byte 3...data byte n	Data	Array of Byte	Parameter data (n= length of ISDU object + 3)

Write_ISDU – Response

- CIP Service Response, general status = 0 → error-free access
Service response without further data
- CIP Service Response, general status ≠ 0 → access error
structure of the response:

Name	Data type	Description
IOL_Master Error	UINT	IO-Link master specific, see IO-Link master Error Codes
IOL_Device Error	UINT	IO-Link device specific, see IO-Link device Error Codes and device documentation

Example:

Write access – Application Specific Tag is written into the device at port 4

Data	Value/content	Description
Class	0x67	IO-Link Parameter Object
Instance	0x01	Addressing the IO-Link master
Instance attribute	0x04	IO-Link port number
Service code	0x4C	Write_ISDU: Write access

Data	Value/content	Description
Data	Request parameters for the ISDU write service	
	Name	Data type Description
	0x18	UINT Index for the application specific tag in the device (e.g. In Turck I/O-Hub TBIL-M1-16DXP)
	0x00	USINT The index has no sub index.
	Byte 0: 0x54 Byte 1: 0x65 Byte 2: 0x6D Byte 3: 0x70 Byte 4: 0x65 ... Byte 17: 0x31 Byte 18...31: 00	The Application Specific Tag of the device can consist of 32 byte, example: ASCII: Temperature_sensor1 Hex: 54 65 6d 70 65 72 61 74 75 72 65 5f 73 65 6e 73 6f 72 31 00 00... The remainder of the 32 bytes not required is filled with 00.

IO-Link master error codes

Error code	Designation acc. to specification	Meaning
0x0000	No error	No error
0x7000	IOL_CALL Conflict	Unexpected write-request, read request expected
0x7001	Wrong IOL_CALL	Decoding error
0x7002	Port blocked	The accessed port is occupied by another task
...	reserved	
0x8000	Timeout	Timeout, IOL master or IOL device port busy
0x8001	Wrong index	Error: IOL index < 32767 or > 65535 selected
0x8002	Wrong port address	Port address not available
0x8002	Wrong port function	Port function not available
...	reserved	

IO-Link device error codes

Error code	Designation acc. to specification	Meaning
0x1000	COM_ERR	Communication error Possible source: the addressed port is parameterized as digital input DI and is not in IO-Link mode
0x1100	I_SERVICE_TIMEOUT	Timeout in communication, device does not respond in time
0x5600	M_ISDU_CHECKSUM	Master reports checksum error, access to device not possible
0x5700	M_ISDU_ILLEGAL	Device can not respond to master request
0x8000	APP_DEV	Application error in the device
0x8011	IDX_NOTAVAIL	Index not available
0x8012	SUBIDX_NOTAVAIL	Sub-Index not available
0x8020	SERV_NOTAVAIL	The service is temporarily not available.

Error code	Designation acc. to specification	Meaning
0x8021	SERV_NOTAVAIL_LOCTRL	Service temporarily not available, device is busy (e. g. teaching or parameterization of the device at the device active)
0x8022	SERV_NOTAVAIL_DEVCTRL	Service temporarily not available, device is busy (e. g. teaching or parameterization of the device via DTM/PLC etc. active)
0x8023	IDX_NOT_WRITEABLE	Access denied, Index cannot be written
0x8030	PAR_VALOUTOFRNG	Parameter value out of the valid range
0x8031	PAR_VALGTLIM	Parameter value value above the upper limit
0x8032	PAR_VALLTLIM	Parameter value value below the lower limit
0x8033	VAL_LENORRRUN	Length of data to be written does not match the length defined for this parameter
0x8034	VAL_LENUNDRUN	
0x8035	FUNC_NOTAVAIL	Function not available in the device
0x8036	FUNC_UNAVAILTEMP	Function temporarily not available in the device
0x8040	PARA_SETINVALID	Invalid parameter: Parameters not consistent with other parameters in the device.
0x8041	PARA_SETINCONSIST	Inconsistent parameters
0x8082	APP_DEVNOTRDY	Application not ready, device busy
0x8100	UNSPECIFIC	Vendor specific, according to device documentation
0x8101... 0x8FF	VENDOR_SPECIFIC	

IO-Link Events Class (VSC 138)

Attr. no.	Designation	Get/Set	Type	Meaning	
Dec.	Hex.				
1	0x01	IOL-Event 1 – port	G	USINT	Port no. of the port which sends the 1st IO-Link Event.
...	...				
16	0x10	IOL-Event 16 – port	G	USINT	Port no. of the port which sends the 16th IO-Link Event.
17	0x11	IOL-Event 1 – qualifier	G	USINT	Qualifier of the 1st IO-Link event
...	...				
32	0x20	IOL-Event 16 – qualifier	G	USINT	Qualifier of the 1st IO-Link event
33	0x21	IOL-Event 1 – Event Code	G	USINT	Event code of the 1st IO-Link event
...	...				
48	0x30	IOL-Event 16 – Event Code	G	USINT	Event code of the 1st IO-Link event

IO-Link Port Class (VSC 179)

This class provides one instance per IO-Link port at the IO-Link master module.

Attr. no.		Designation	Get/ set	Type	Meaning
Dec.	Hex.				
Parameters					
1	0x01	Operation mode	G/S	USINT	0 = IO-Link without validation 1 = IO-Link with family compatible device 2 = IO-Link with compatible device 3 = IO-Link with identical device 4 = DI (with parameter access) 5...7 = reserved 8 = DI 8 = DI
2	0x02	Data Storage Mode	G/S	USINT	0 = activated 1 = overwrite 2 = read in 3 = deactivated, clear
3	0x03	Cycle time	G/S	USINT	See [▶ 100]
4	0x04	Revision	G/S	USINT	0 = automatic 1 = V 1.0
5	0x05	Activate Quick Start-Up	G/S	USINT	0 = no 1 = yes
6	0x06	Device parameterization via GSD	G/S	USINT	0 = no 1 = yes
7	0x07	Process input data invalid	G/S	USINT	0 = diagnostics generated 1 = no diagnostic generated
8	0x08	Deactivate diagnostics	G/S	USINT	0 = no 1 = notifications 2 = notifications and warnings 3 = yes
9	0x09	Process input data mapping	G/S	USINT	0 = direct 1 = swap16 bit 2 = swap 32 bit 3 = swap all
10	0x0A	Process output data mapping	G/S	USINT	0 = direct 1 = swap16 bit 2 = swap 32 bit 3 = swap all
11	0x0B	Vendor ID	G/S	INT	
12	0x0C	Device ID	G/S	DINT	
Diagnostics					
13	0x0D	Wrong or missing device	G	USINT	0 = inactive 1 = active
14	0x0E	Data storage error	G	USINT	0 = inactive 1 = active
15	0x0F	Process input data invalid	G	USINT	0 = inactive 1 = active

Attr. no.		Designation	Get/ set	Type	Meaning
Dec.	Hex.				
16	0x10	Hardware error	G	USINT	0 = inactive 1 = active
17	0x11	Maintenance events	G	USINT	0 = inactive 1 = active
18	0x12	Out-of-specification events	G	USINT	0 = inactive 1 = active
19	0x13	Parameterization error	G	USINT	0 = inactive 1 = active
20	0x14	Over temperature	G	USINT	0 = inactive 1 = active
21	0x15	Lower limit value underrun	G	USINT	0 = inactive 1 = active
22	0x16	Upper limit value exceeded	G	USINT	0 = inactive 1 = active
23	0x17	Undervoltage	G	USINT	0 = inactive 1 = active
24	0x18	Overvoltage	G	USINT	0 = inactive 1 = active
25	0x19	Overload	G	USINT	0 = inactive 1 = active
26	0x1A	Common error	G	USINT	0 = inactive 1 = active
27	0x1B	Port parameterization error	G	USINT	0 = inactive 1 = active
Process data					
28	0x1C	Input data word 0	G	USINT	
...	G	USINT	
43	0x2B	Input data word 15	G	USINT	
44	0x2C	Output data word 0	G	USINT	
...	G	USINT	
59	0x3B	Output data word 15	G	USINT	

Basic Class (VSC 180)

Attr. no. Dec.	Hex.	Designation	Get/set	Type	Meaning
1	0x01	IOL 0 - Manual output reset after overcurrent	G/S	USINT	0 = no 1 = yes
2	0x02	IOL 1 - Manual output reset after overcurrent	G/S	USINT	0 = no 1 = yes
3	0x03	IOL 2 - Manual output reset after overcurrent	G/S	USINT	0 = no 1 = yes
4	0x04	IOL 3 - Manual output reset after overcurrent	G/S	USINT	0 = no 1 = yes
5	0x05	Overcurrent supply VAUX1 K0	G/S	USINT	0 = no 1 = yes
6	0x06	Overcurrent supply VAUX1 K1	G/S	USINT	0 = no 1 = yes
7	0x07	Overcurrent supply VAUX1 K2	G/S	USINT	0 = no 1 = yes
8	0x08	Overcurrent supply VAUX1 K3	G/S	USINT	0 = no 1 = yes
9	0x09	IOL 0 – Overcurrent output	G	USINT	0 = inactive 1 = active
10	0x0A	IOL 1 – Overcurrent output	G	USINT	0 = inactive 1 = active
11	0x0B	IOL 2 – Overcurrent output	G	USINT	0 = inactive 1 = active
12	0x0C	IOL 3 – Overcurrent output	G	USINT	0 = inactive 1 = active
13	0x0D	IOL 0 – DI input	G	USINT	01
14	0x0E	IOL 1 – DI input	G	USINT	01
15	0x0F	IOL 2 –DI input	G	USINT	01
16	0x10	IOL 3 – DI input	G	USINT	01
17	0x11	IOL0 - Input value valid (Data Valid Signal)	G	USINT	0 = no 1 = yes
18	0x12	IOL0 - Input value valid (Data Valid Signal)	G	USINT	0 = no 1 = yes
19	0x13	IOL4 - Input value valid (Data Valid Signal)	G	USINT	0 = no 1 = yes
20	0x14	IOL6 - Input value valid (Data Valid Signal)	G	USINT	0 = no 1 = yes
21	0x15	Output value	G	Byte	0 = IOL 0 1 = IOL 1 2 = IOL 2 3 = IOL 3

Class 181 – VAUX Control

This class contains parameters for the 24 VDC sensor and actuator supply.

Applies to:

Attr.-no.		Designation	Get/Set	Type	Meaning
Dec.	Hex.				
Parameters					
1	0x01	VAUX1 pin3 C0	G/S	USINT	0: 24 VDC 1: switchable 2: off
2	0x02	VAUX1 pin5 C1	G/S	USINT	0: 24 VDC 1: switchable 2: off
3	0x03	VAUX1 pin7 C2	G/S	USINT	0: 24 VDC 1: switchable 2: off
4	0x04	VAUX1 pin9 C3	G/S	USINT	0: 24 VDC 1: switchable 2: off
5	0x05	VAUX1 pin3 C0	G	USINT	0: on 1: off
6	0x06	VAUX1 pin5 C1	G	USINT	0: on 1: off
7	0x07	VAUX1 pin7 C2	G	USINT	0: on 1: off
8	0x08	VAUX1 pin7 C2	G	USINT	0: on 1: off

8.10 Connecting the Devices to a Rockwell PLC with EtherNet/IP

Used Hardware

The following hardware components are used in this example:

- Rockwell PLC ControlLogix 1756-L72, Logix 5572
- Rockwell Scanner 1756-EN2TR
- Block module FEN20-4IOL

Used Software

The following software tools are used in this example:

- Rockwell RS Logix
- Catalog file for Turck compact stations "TURCK_BLOCK_STATIONS_Vxx.L5K" as part of the file "FEN20_ETHERNETIP.zip" (downloadable free of charge under www.turck.com)

Catalog files

Turck provides catalog files "TURCK_BLOCK_STATIONS_Vxx.L5K" for use in Rockwell Automation's RSLogix/Studio5000. The catalog files contain predefined, application-dependent device configurations with different input and output data widths and descriptions of the configuration, input and output tag data. The predefined device configurations correspond to the input and output assembly instances described in the section "Assembly Object" in the chapter "Commissioning Devices with EtherNet/IP" → under "EtherNet/IP standard classes".



NOTE

The catalog file is available in the L5K file format and must be converted to the "ACD" file format before it can be used. The file is opened in RSLogix/Studio5000 and saved as a project (*.ACD).

Prerequisites

- An instance of the programming software with the Catalog files is opened.
- A new project has been created in a second instance of RSLogix.
- The PLC and the Scanner mentioned above have been added to the project in the second instance.

8.10.1 Adding the devices from the catalog files to the new project

- ▶ Right-click the device entry and use **Copy**.

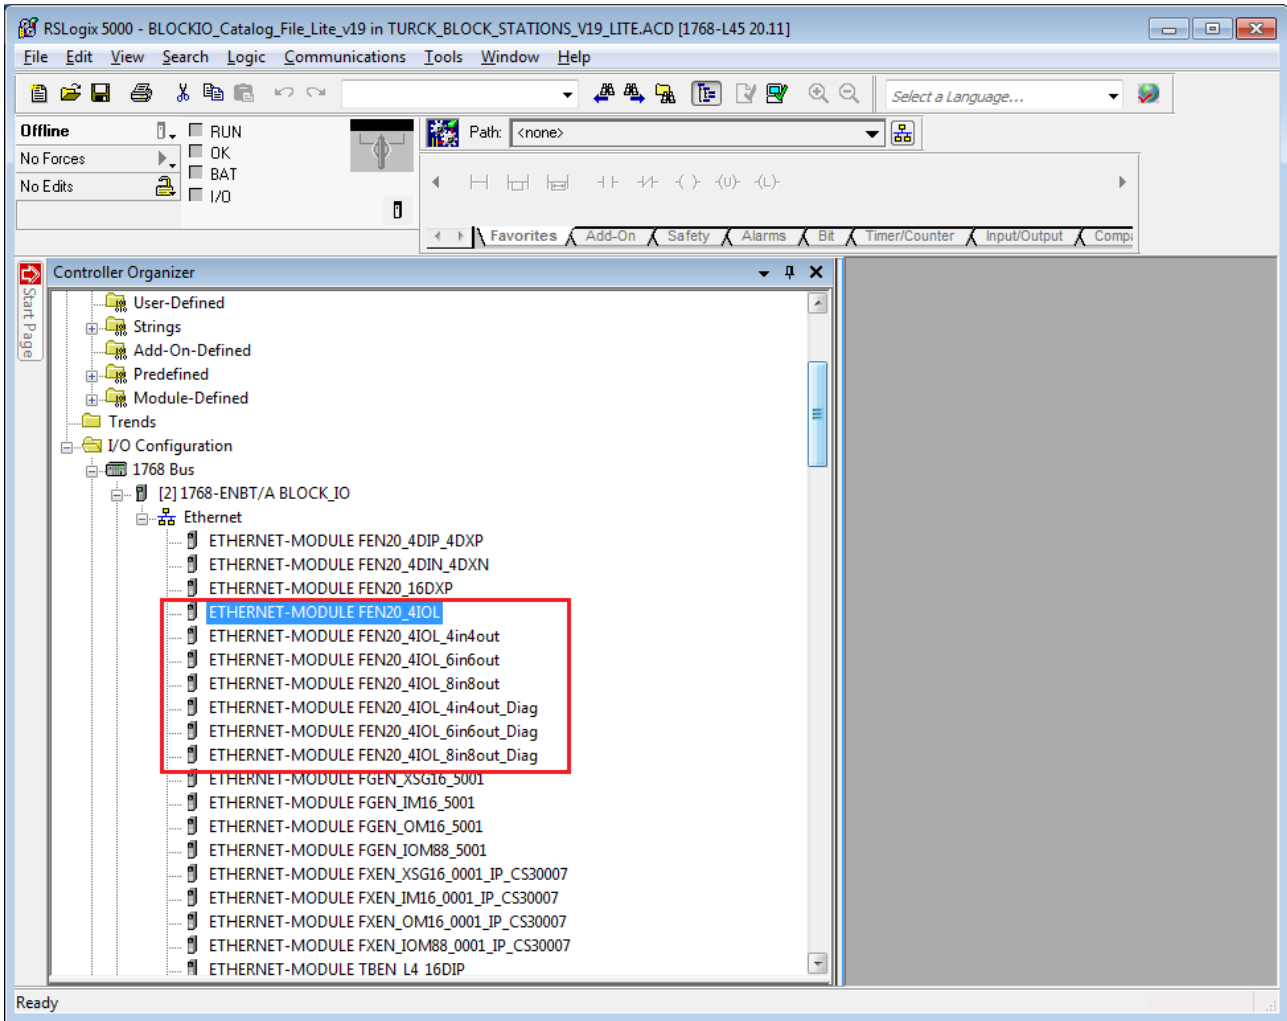


Fig. 42: RSLogix – Copying the device entry from catalog file

- ▶ Right-click the EtherNet/IP Scanner in the second instance of the RS Logix and add the device to the project via Paste. In this example, the configuration with 4 byte in- and 4 byte output data plus diagnostics FEN20_4IOL_4in4out_diag is used.

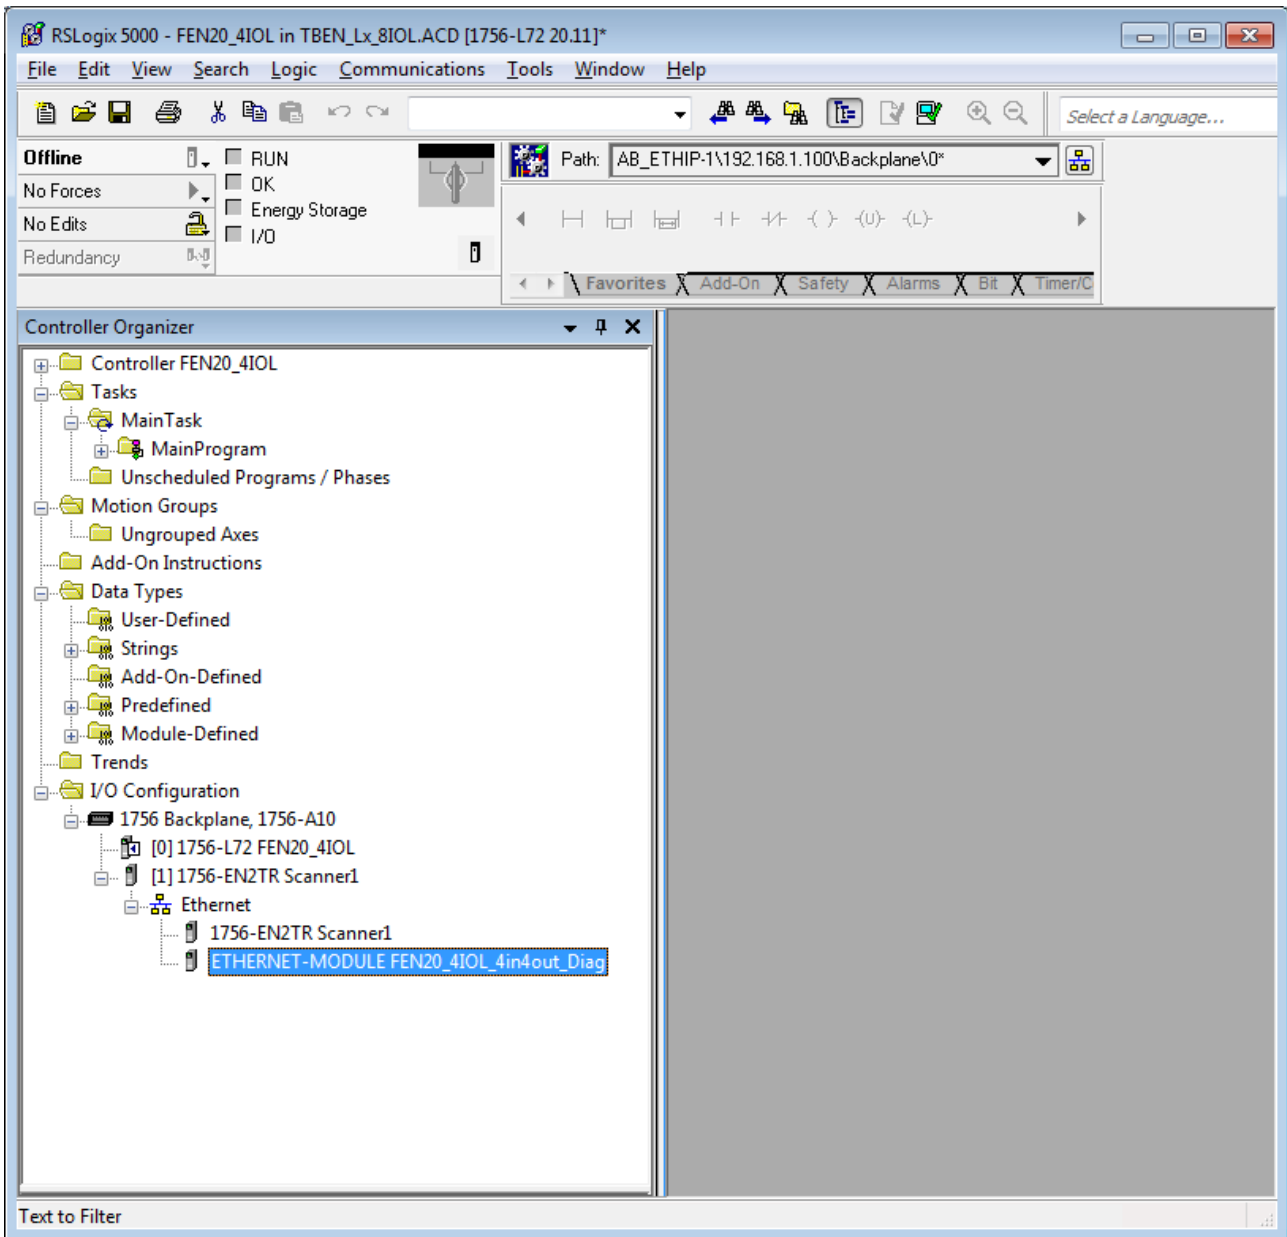


Fig. 43: RSLogix – predefined configurations of FEN20-4IOL in new project

8.10.2 Configuring the device in RS Logix

- ▶ Open the device entry by double-clicking.
- ▶ Assign a module name.
- ▶ Set the IP address of the device.

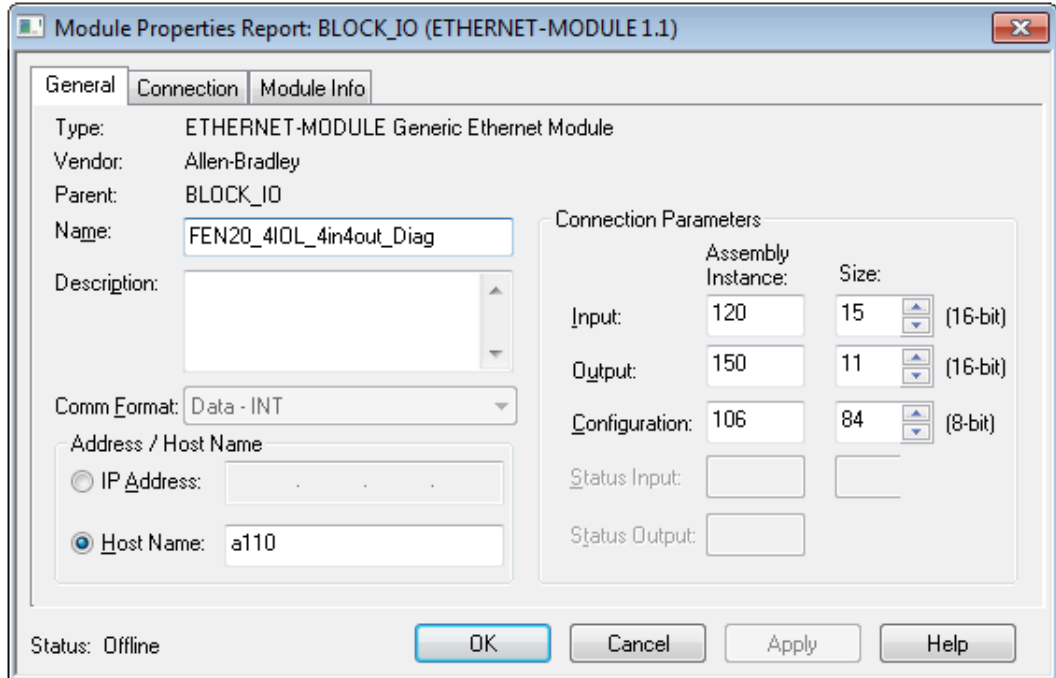


Fig. 44: Setting module name and IP address

- ▶ Optional: Set the connection parameters

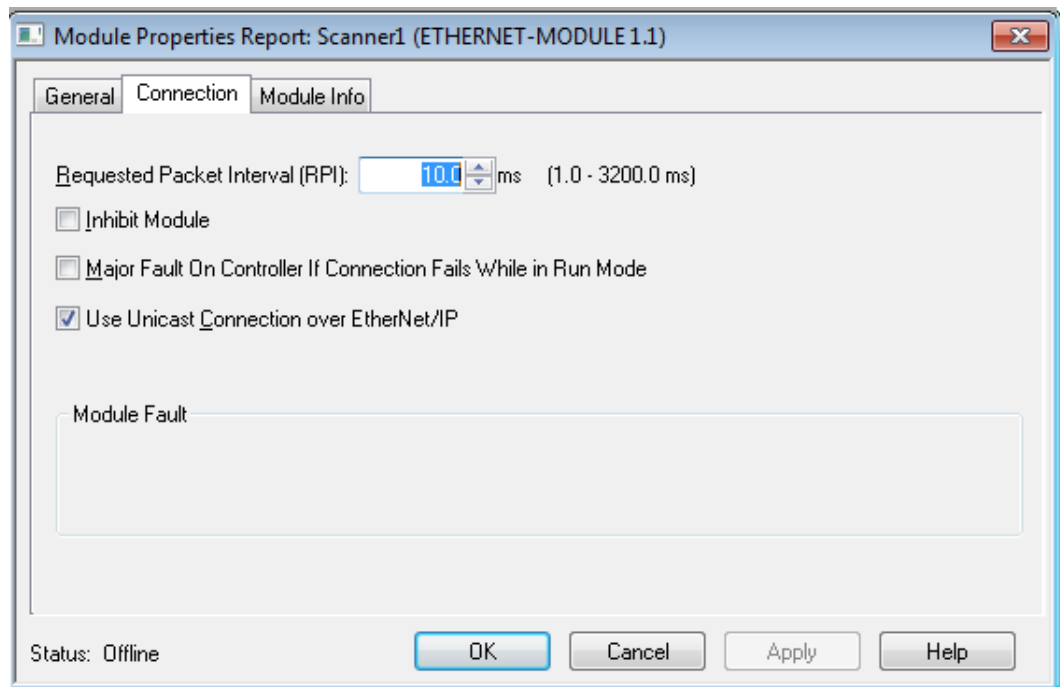


Fig. 45: Setting the connection parameters

8.10.3 Parameterizing the device

- ▶ Open the Controller Tags of the device.
- ▶ Parameterize the device via the Controller Tags **FEN20_4IOL_4in_4out_diag:C**.

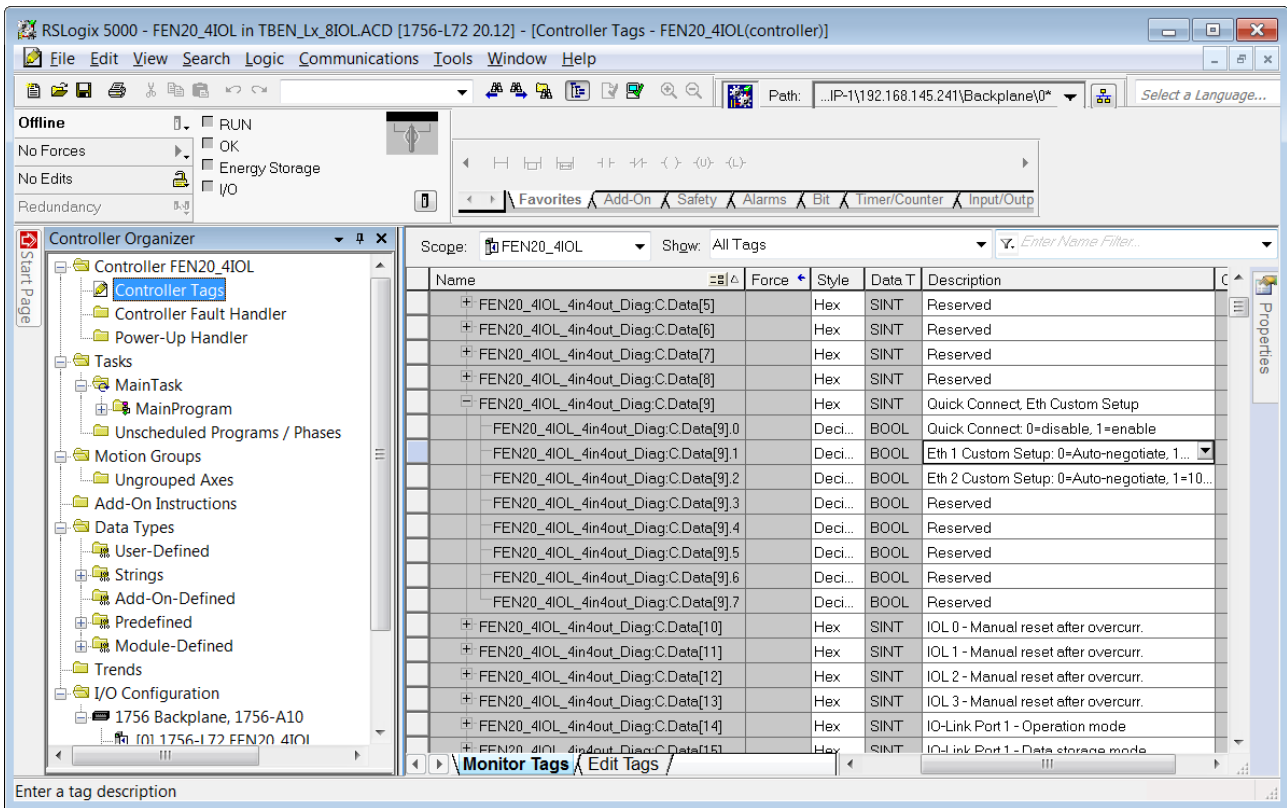


Fig. 46: Parameterizing the Device

8.10.4 Going online with the PLC

- ▶ Search the network via the Who Active function.
- ▶ Select the PLC.
- ▶ Set the communication path via Set Project Path.
- ⇒ The communication path is set.

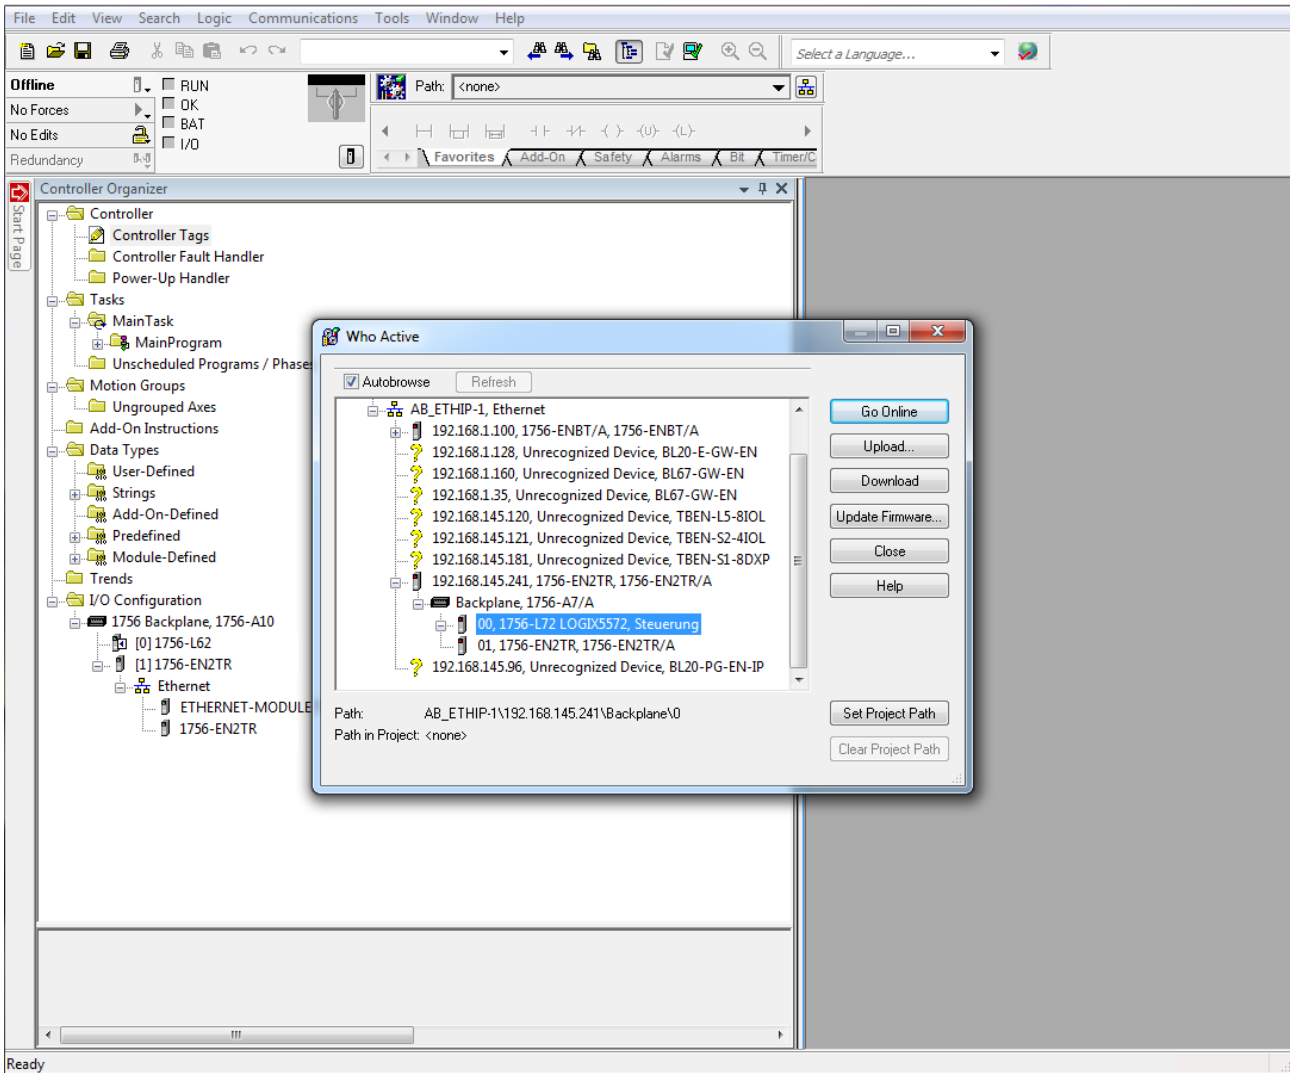


Fig. 47: Setting the communication path

- ▶ Select the PLC.
- ▶ Click **Go online**.

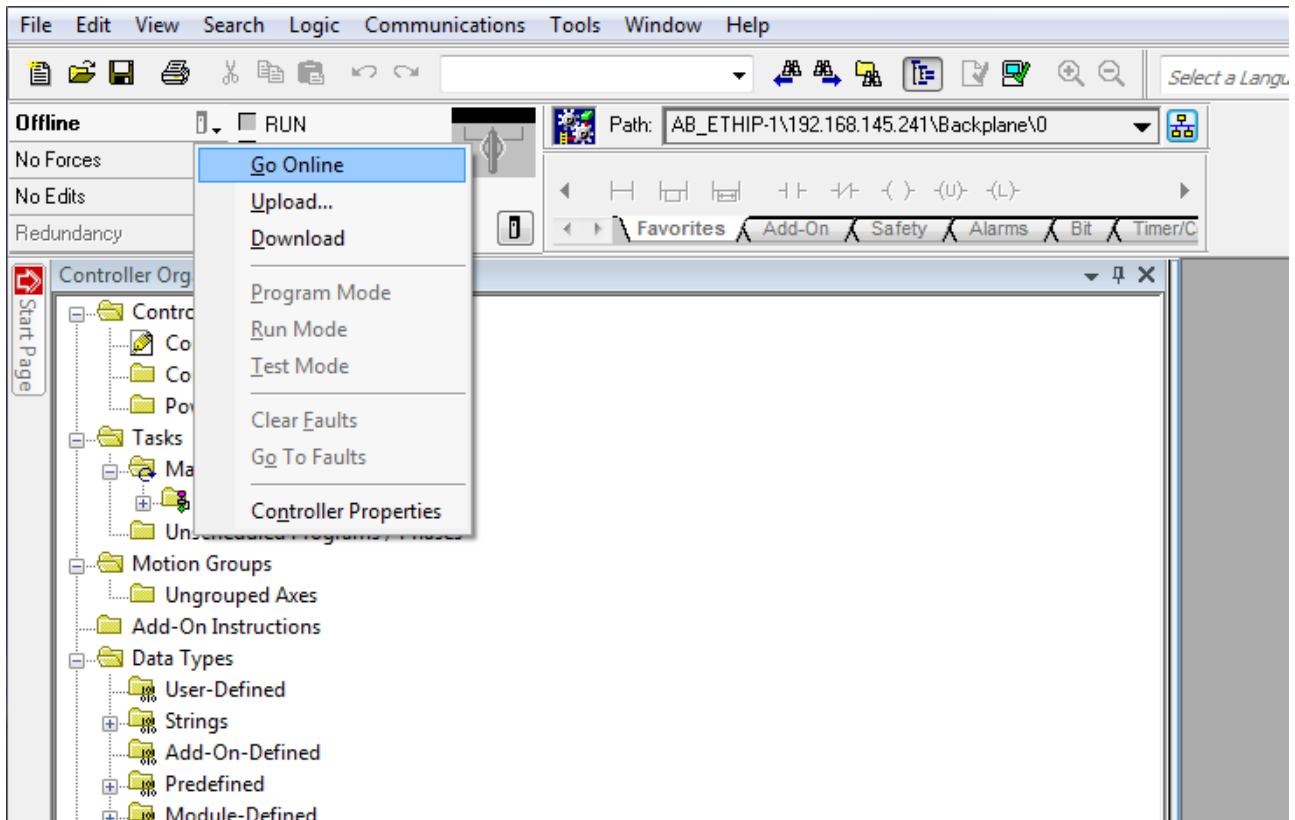


Fig. 48: Going online with the device

- ▶ Click **Download** In the following dialog (Connect To Go Online)
- ▶ Confirm all following messages.
- ⇒ The project is loaded down to the controller. The connection is established.

8.10.5 Reading process data

- ▶ Open the Controller Tags in the project tree by double-clicking the entry.
- ⇒ The access to parameter data (TFEN20_4IOL_...:C), input data (FEN20_4IOL_...:I) and output data (FEN20_4IOL_...:O) is possible.

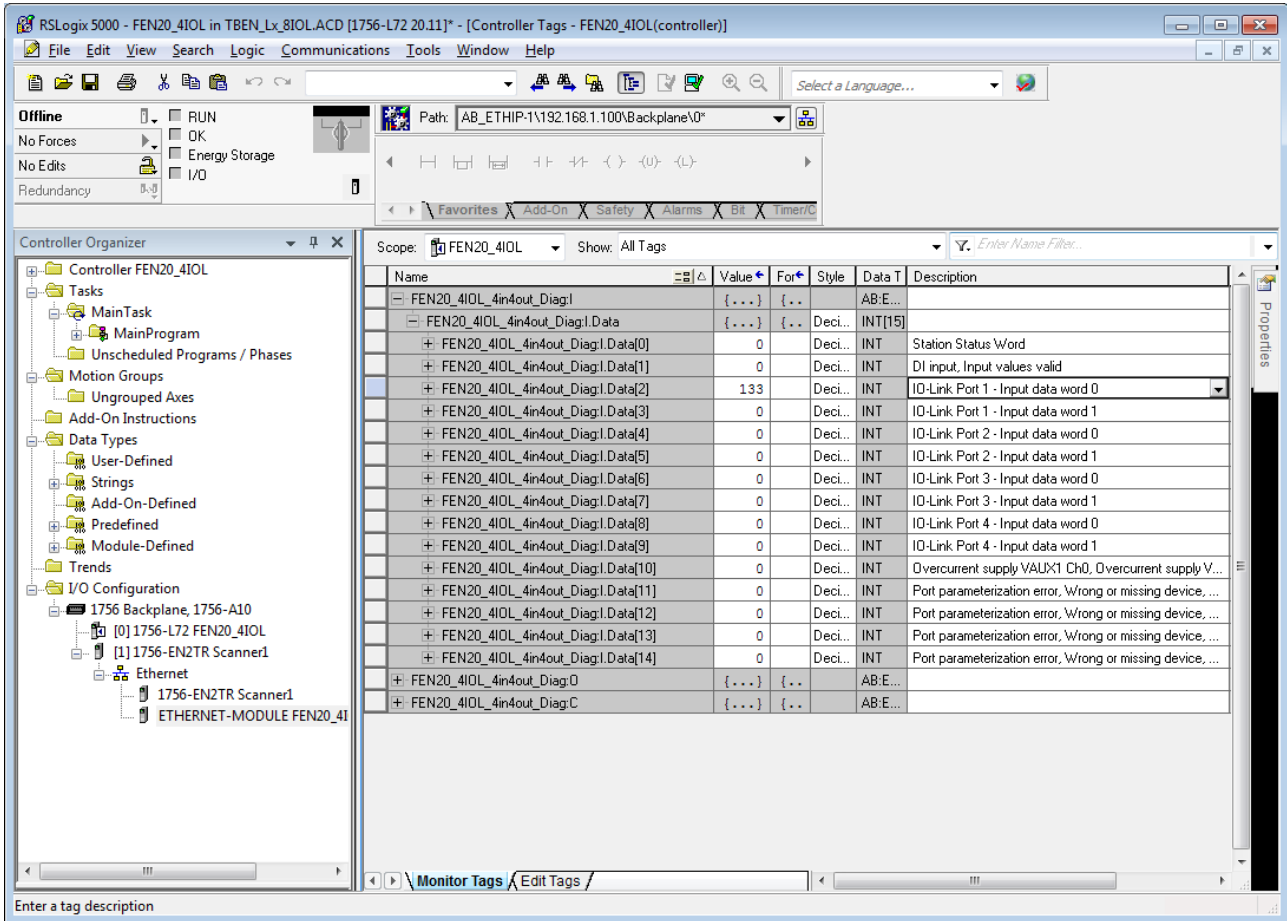


Fig. 49: Controller Tags in the project tree

9 Parameterizing and Configuring

9.1 Parameters

The device has 2 bytes of module parameters, 16 bytes each of IO-Link port parameters and 8 bytes of parameters for VAUX1 monitoring.

Word no.	Bit no.																
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
Basic																	
0x00	-	-	-	-	-	-	-	-	-	-	-	-	SRO ch3	SRO ch2	SRO ch1	SRO ch0	
IO-Link port 1																	
0x01	Cycle time							GSD	Activate quick start-up	Data storage mode	Operation mode						
0x02	-							Mapping PCDO	Mapping PDIN	Deactivate diag.	PDIN invalid	Rev.					
0x03... 0x04	-							-	-	-	-	-	-	-	-	-	-
0x05	Vendor ID (MSB)							Vendor ID (LSB)									
0x06	Device ID							Device ID (LSB)									
0x07	Device ID (MSB)							Device ID									
0x08	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
IO-Link port 2																	
0x09... 0x10	Assignment similar to IO-Link port 1 (word 0x02...0x09)																
IO-Link port 3																	
0x11... 0x18	Assignment similar to IO-Link port 1 (word 0x02...0x09)																
IO-Link port 4																	
0x19... 0x20	Assignment similar to IO-Link port 1 (word 0x02...0x09)																
VAUX monitoring																	
0x21	-	-	-	-	-	-	VAUX1 pin (ch1)	-	-	-	-	-	-	-	-	VAUX1 pin2 (ch0)	
0x22	-	-	-	-	-	-	VAUX1 pin8 (ch3)	-	-	-	-	-	-	-	-	VAUX1 pin6 (ch2)	

The default values are shown in **bold type**.

Parameter name	Value		Meaning	Description
	Dec.	Hex.		
Manual output reset after overcurrent (SROx)	0	0x00	Yes	The output switches on automatically after an overload.
	1	0x01	No	The output is manually switched-off after an overload until a new set-command is given (rise and fall).
Activate output Chx (DXPx_ENDO)	0	0x00	Yes	The output at pin 2 is deactivated.
	1	0x01	No	The output at pin 2 is activated.
Operation mode	0	0x00	IO-Link without validation	Pin 4 is operated in IO-Link mode. The master does not check if the connected device matches the configured one.
	1	0x01	IO-Link with compatible device	Pin 4 is operated in IO-Link mode. The master checks if the Vendor ID and the MSB of the Device ID (this byte defines the product family) of the connected device match those of the configured one. If the master detects a mismatch, the IO-Link communication is established, but there is no process data exchange. The device remains in the safe state (Pre-Operate). Parameters and diagnostic information can be read and respectively written.
	2	0x02	IO-Link with compatible device	Pin 4 is operated in IO-Link mode. The master checks if the Vendor ID and the Device ID of the connected device match those of the configured one. If the Vendor ID matches, but the Device ID not, then the master tries to write the Device ID to the device. If the writing is successful, then the device is a compatible one, process data exchange is possible. If writing the Device ID is not successful, then process data exchange is not possible. The device remains in the safe state (Pre-Operate). Parameters and diagnostic information can be read and respectively written.
	3	0x03	IO-Link with identical device	Pin 4 is operated in IO-Link mode. The master checks if the device type (Vendor ID and Device ID) and the serial number of the connected device match the data of the configured one. If the master detects a mismatch, the IO-Link communication is established, but there is no process data exchange. The device remains in the safe state (Pre-Operate). Parameters and diagnostic information can be read and respectively written.

Parameter name	Value		Meaning	Description
	Dec.	Hex.		
Operation mode	4	0x04	DI (with parameter access)	Pin 4 is generally operated as simple digital input. However, an acyclic parameter access from the PLC or the DTM is possible. The IO-Link master starts the port in IO-link mode, parameterizes the device and sets the port back into SIO mode (SI). The port remains in SIO mode (DI) until a new IO-Link request is sent from the higher-level control. Data storage is not supported. Connected devices have to support the SIO mode (DI). In case of a parameter access, the IO-Link communication at the port is started. Switching signals are interrupted.
	8	0x08	DI	Pin 4 is operated as simple digital input. Data storage is not supported.
	9	0x09	DX	The channel is operated as universal digital DXP channel.
Data storage mode	<p>Synchronization of parameter data of IO-Link devices (storing the parameter of the connected device in the master). If the synchronization is not possible, a diagnostic message is displayed (DS_ERR). In this case the data memory of the master must be deleted:</p> <ul style="list-style-type: none"> ▶ Select option "11 = deactivated, delete" to delete the data memory of the master <p>IO-Link devices in accordance with IO-Link specification V1.0 do not support data storage. When using IO-Link devices with IO-Link V1.0:</p> <ul style="list-style-type: none"> ▶ Select option "11 = deactivated, delete" to deactivate data storage. 			
	0	0x00	Activated	Synchronization of parameter data activated. The actual data (master or device) serve as the reference data.
	1	0x01	overwrite	Synchronization of parameter data activated, the data in the master serve as reference data.
	2	0x02	read in	Synchronization of parameter data activated. The data in the connected IO-Link device serve as reference data.
	3	0x03	Deactivated, clear	Synchronization of parameter data deactivated. The data set in the master is deleted.
Activate Quick Start-Up	For fast applications (e.g. tool changing applications) the start-up time of IO-Link devices can be shortened. The start-up time defined in the IO-Link specification (TSD = Device Detection Time) is reduced.			
	0	0x00	No	The start-up time is within the specified range (0.5 s). All IO-Link devices in accordance with the specification can be operated.
	1	0x01	Yes	The start-up time is reduced to approx. 100 ms. It is not supported by every IO-Link device. It can thus be necessary to check if the used IO-Link device starts in this mode.
Device parameterization via GSD (GSD)	0	0x00	inactive	The port is generic or is not parameterized.
	1	0x01	Active	In PROFINET the port is parameterized with a specific device type from the GSDML-file.

Parameter name	Value		Meaning	Description
	Dec.	Hex.		
Cycle time	0	0x00	Automatic	The lowest cycle time supported by the device is taken from the table.
	16... 191	0x10 ...	1.6...132.8 ms	Settable in steps of 0.8 or 1.6 ms.
	255	0xFF	Automatic, compatible	Compatibility mode The mode solves possible communication problems with sensors of the SGB family from IFM.
Revision	0	0x00	Automatic	The Master defines the IO-Link revision automatically.
	1	0x01	V1.0	IO-Link Revision V 1.0 is used.
Process input data invalid (PDIN invalid)	0	0x00	Diagnostic generated	If the process data are invalid, a respective diagnostic message is generated.
	1	0x01	No diagnostic generated	Invalid process data do not cause a diagnostic message.
Deactivate diagnostics	Influences the sending of IO-Link-Events from the master to the fieldbus. Depending on the parameterization, the master transmits Events based on their priority to the fieldbus or not.			
	0	0x00	No	The master transmits all IO-Link Events to the fieldbus.
	1	0x01	Notifications	The master transmits all IO-Link Events to the fieldbus except for IO-Link notifications.
	2	0x02	Notifications and warnings	The master transmits all IO-Link Events to the fieldbus except for IO-Link notifications and warnings.
Process input data mapping (Mapping PDIN)	Optimization of the process data mapping for the used fieldbus: The I/O-Link-data can be swapped depending on the used fieldbus in order to achieve an optimized data mapping on the fieldbus side. PROFINET: With PROFINET, the parameter is permanently set to 0x00 = direct and cannot be changed.			
	0	0x00	direct	The process data are not swapped. i.e.: 0x0123 4567 89AB CDEF
	1	0x01	Swap 16 bit	The bytes are swapped per word. i.e.: 0x2301 6745 AB89 EFCD
	2	0x02	Swap 32 bit	The bytes are swapped per double word. i.e.: 0x6745 2301 EFCD AB89
	3	0x03	swap all	All bytes are swapped. i.e.: 0xEFCD AB89 6745 2301
Process output data mapping (Mapping PDOOUT)	see above Process input data mapping			
Vendor ID	0...65535 0x0000... 0xFFFF	Vendor ID for the port configuration check		
Device ID	0... 16777215 0... 0x00FFFFFF	Device ID for the port configuration check 24 bit value		

Parameter name	Value		Meaning	Description
	Dec.	Hex.		
VAUX1 pin x Chx	0	0x00	24 VDC	The 24 VDC sensor/actuator supply at the respective pin is switched on.
	1	0x01	switchable	The 24 VDC sensor/actuator supply at the respective pin is switchable via the process data.
	2	0x02	off	The 24 VDC sensor/actuator supply at the respective pin is switched off .

Values for the parameter "cycle time" [ms]:

Time	Value	Time	Value	Time	Value	Time	Value	Time	Value	Time	Value
auto	0x00	16	0x58	31.2	0x7E	60.8	0x92	91.2	0xA5	121.6	0xB8
1.6	0x10	16.8	0x5A	32	0x80	62.4	0x93	92.8	0xA6	123.2	0xB9
2.4	0x18	17.6	0x5C	33.6	0x81	64	0x94	94.4	0xA7	124.8	0xBA
3.2	0x20	18.4	0x5E	35.2	0x82	65.6	0x95	96	0xA8	126.4	0xBB
4	0x28	19.2	0x60	36.8	0x83	67.1	0x96	97.6	0xA9	128	0xBC
4.8	0x30	20	0x62	38.4	0x84	68.8	0x97	99.2	0xAA	129.6	0xBD
5.6	0x38	20.8	0x67	40	0x85	70.4	0x98	100.8	0xAB	131.2	0xBE
6.4	0x40	21.6	0x66	41.6	0x86	72	0x99	102.4	0xAC	132.8	0xBF
7.2	0x42	22.4	0x68	43.2	0x87	73.6	0x9A	104	0xAD	reserved	
8	0x44	23.2	0x6A	44.8	0x88	75.2	0x9B	105.6	0xAE		
8.8	0x46	24.0	0x6C	46.4	0x89	76.8	0x9C	107.2	0xAF		
9.6	0x48	24.8	0x6E	48	0x8A	78.4	0x9D	108.8	0xB0		
10.4	0x4A	25.6	0x70	49.6	0x8B	80	0x9E	110.4	0xB1		
11.2	0x4C	26.4	0x72	51.2	0x8C	81.6	0x9F	112	0xB2		
12.0	0x4E	27.2	0x74	52.8	0x8D	83.2	0xA0	113.6	0xB3		
12.8	0x50	28	0x76	54.4	0x8E	84.8	0xA1	115.2	0xB4		
13.6	0x52	28.8	0x78	56	0x8F	86.4	0xA2	116.8	0xB5		
14.4	0x54	29.6	0x7A	57.6	0x90	88	0xA3	118.4	0xB6		
15.2	1x56	30.4	0x7C	59.2	0x91	89.6	0xA4	120	0xB7	auto., comp.	0xFF

9.1.1 Adapting process data mapping

The mapping of process data can be adapted application-specifically via the IO-Link master's parameterization.

Depending on the used fieldbus, it can be necessary to swap process data word-wise, double word-wise or completely in order to align them to the data structure in the PLC. The process data mapping is determined channel by channel through the parameters **process input data mapping** and **process output data mapping**.

Example mapping for field buses with Little Endian-format:

Mapping through the IO-Link master → field bus → PLC						
Byte	Device at IO-Link port	Device process data in IO-Link master		Parameter: Process data mapping	Device process data to field bus	
Byte 0		Status			Status	
Byte 1		Control			Control	
IO-Link port 1						
Byte 2	Temperature sensor TS...	Temperature	Low byte	swap 16 bit	Temperature	High byte
Byte 3			High byte			Low byte
IO-Link port 2						
Byte 4	Linearity sensor Li...	Position	Low byte	swap 16 bit	position	High byte
Byte 5			High byte			Low byte
IO-Link port 3						
Byte 6	I/O hub TBIL-...	Digital signals	0...7	Direct	Digital signal	0...7
Byte 7		Digital signals	8...15		Digital signal	8...15
IO-Link port 4						
Byte 8		Diagnostics		swap all	Counter/position value	Most Significant Byte
Byte 9	Rotary encoder RI...	Counter/position value	Low byte			High byte
Byte 10			High byte			Low byte
Byte 11			Most Significant Byte		Diagnostics	

9.1.2 PROFINET parameters

For PROFINET, a distinction must be made in the parameters between the PROFINET device parameters and the parameters of the I/O channels Parameters_TBEN_S2-4IOL .

PROFINET device parameters

Default values are shown in **bold**.

Parameter name	Value	Meaning	Description
Output behavior at communication loss	0	set to 0	The device switches the outputs to "0". No error information sent.
	1	Hold current value	The device maintains the actual output data.
Deactivate all diagnostics	0	No	Diagnostic and alarm messages are generated.
	1	yes	Diagnostic and alarm messages are suppressed.
Deactivate load voltage diagnostics	0	No	The monitoring of voltage V2 is activated.
	1	yes	If V2 is undershot, this is not displayed.
Deactivate Force Mode	0	No	Explicit deactivation of the Ethernet protocols or web server
	1	yes	
Deactivate EtherNet/IP	0	No	
	1	yes	
Deactivate Modbus TCP	0	No	
	1	yes	
Deactivate WEB server	0	No	
	1	yes	

9.2 IO-Link functions for acyclic communication

The acyclic access to the data of IO-Link devices is realized via IO-Link CALLs. A distinction must be made between data of the IO-Link master (IOLM) and data of connected IO-Link devices (IOLD).

The addressing of the IO-Link CALL defines which device is addressed via the CALL:

The addressing is defined by the so called Entity_Port:

- Entity_Port 0 = IO-Link master module (IOLM)
- Entity_Port 1 = IO-Link device at IO-Link port 1
- ...
- Entity_Port 4 = IO-Link device at IO-Link port 4

9.2.1 Port functions for Port 0 (IO-Link Master)

IO-Link Index (port function invocation)

The access to the IO-Link master functionalities (port 0) is done via index 65535:

Subindex 64: Master Port Validation Configuration

The object writes a specific configuration of the Devices to be connected to the IO-Link port to the Master. The master stores the data for the The IO-Link device expected at the port and then accepts only one device at the port with exactly matching data (vendor ID, device ID and serial number).

The Master Port Validation Configuration is only useful in combination with an operation mode with validation (**IO-Link with family compatible device, IO-Link with compatible device, IO-Link with identical device.**)

Entity_Port	IO-Link sub index	Read/write	Length
0	64	Write	Max. 96 byte

Structure of the command IOL_Port_Config:

	Content	Size	Format	Comment
IOL1	VENDOR_ID	2 byte	Unsigned 16	
	DEVICE_ID	4 byte	Unsigned 32	
	FUNCTION_ID	2 byte	Unsigned 16	Value: 0
	SERIAL_NUMBER	16 byte	String	
IOL2	VENDOR_ID	2 byte	Unsigned 16	
	DEVICE_ID	4 byte	Unsigned 32	
	FUNCTION_ID	2 byte	Unsigned 16	Value: 0
	SERIAL_NUMBER	16 byte	String	
IOL3	VENDOR_ID	2 byte	Unsigned 16	
	DEVICE_ID	4 byte	Unsigned 32	
	FUNCTION_ID	2 byte	Unsigned 16	Value: 0
	SERIAL_NUMBER	16 byte	String	
IOL4	VENDOR_ID	2 byte	Unsigned 16	
	DEVICE_ID	4 byte	Unsigned 32	
	FUNCTION_ID	2 byte	Unsigned 16	Value: 0
	SERIAL_NUMBER	16 byte	String	

Subindex 65: IO-Link Events

The object reads IO-Link Event diagnostics.

Entity_Port	IO-Link sub index	Read/write	Length
0	65	Read	255 byte



NOTE

Only "appears" (coming diagnostics) and "Single Shot Events" are shown, as long as they are pending.

Structure of the read data:

- Byte 0 contains 2 bit per IO-Link port which show, if the process data of the connected device are valid or not.
- Byte 0 is followed by 4 byte per Diagnostic Event which clearly assign and specify the diagnostic message. A maximum of 14 Events per IO-Link port are shown.

Byte no.	Bit no.								Description
	7	6	5	4	3	2	1	0	
0								x	PD_Valid Input Port 1
							x		PD_Valid Output Port 1
						x			PD_Valid Input Port 2
					x				PD_Valid Output Port 2
				x					PD_Valid Input Port 3
			x						PD_Valid Output Port 3
		x							PD_Valid Input Port 4
	x								PD_Valid Output Port 4
1	reserved								
2	Qualifier								Defines the type of the event (Warning, Notification, Single Shot Event, etc.) in accordance with IO-Link specification "IO-Link Interface and System".
3	Port								IO-Link port which sends an event
4	Event Code high byte								High or- low byte of the error code sent
5	Event Code low byte								
...									...
223	Qualifier								see byte 2...5
224	Port								
225	Event Code high byte								
226	Event Code low byte								

Subindex 66: Set Default Parameterization

Writing this object sets the IO-Link master back to factory settings. Any parameter setting and configuration is overwritten. The data storage buffer is deleted as well.

Entity_Port	IO-Link sub index	Read/write	Length
0	66	Write	4 byte

Structure of the reset command:

Byte 3	Byte 2	Byte 1	Byte 0
0xEF	0xBE	0xAD	0xDE

Subindex 67: Teach Mode

The master reads all data (device-ID, vendor-ID, serial number, etc.) from the connected device and saves them. All all previously saved device data are overwritten.

Entity_Port	IO-Link sub index	Read/write	Length
0	67	Write	1 byte

Structure of the Teach command:

Byte 0	
0x00	Teach all ports
0x01	Teach port 1
0x02	Teach port 2
0x03	Teach port 3
0x04	Teach port 4
0x05...0xFF	reserved

Subindex 68: Master Port Scan Configuration

The object reads the configuration of the IO-Link devices connected to the IO-Link master.
28 byte are returned per IO-Link port.

Entity_Port	IO-Link sub index	Read/write	Length
0	68	Read	Max. 120 byte

Structure of the response telegram:

IO-Link port	Content	Length	Format	Description
Port 1	Vendor ID	2 byte	UINT16	Vendor ID of the connected device
	Device ID	4 byte	UINT32	Device ID of the connected device
	Function ID	2 byte	UINT16	reserved
	Serial Number	16 byte	UINT8	Serial number of the connected device
	COM_Revision	1 byte	UINT8	IO-Link version
	Proc_In_Length	1 byte	UINT8	Process input data length of the connected device
	Proc_Out_Length	1 byte	UINT8	Process output data length of the connected device
	Cycle time	1 byte	UINT8	Cycle time of the connected device

Port 2...port 4 Structure similar to port 1

Subindex 69: Extended Port Diagnostics

The object reads the Extended Port Diagnostics.

Entity_Port	IO-Link sub index	Read/write	Length
0	68	Read	Max. 120 byte

Structure of the Extended Port Diagnostics:

Byte no.	Bit no.							
	7	6	5	4	3	2	1	0
0	NO_SIO	TCYC	-	-	DS_F	NO_DS	-	-
1	-	WD	MD	PDI_H	-	-	NO_PD	-
2	-	-	-	-	-	-	-	-
3	Device status according to IO-Link specification							

Diagnostic bit	Meaning
NO_DS	The parameterized port mode does not support data storage. Remedy: ■ Change the parameterization of the port.

Diagnostic bit	Meaning
DS_F	<p>Error in the data storage, synchronization not possible</p> <p>Possible causes:</p> <ul style="list-style-type: none"> ■ Connected device does not support data storage ■ Overflow of the data storage buffer <p>Remedy:</p> <ul style="list-style-type: none"> ▶ Connect a device that supports data storage. ▶ Clear the data storage buffer. ▶ Deactivate the data storage.
TCYC	<p>The device does not support the cycle time parameterized in the master.</p> <p>Remedy:</p> <ul style="list-style-type: none"> ▶ Increase the cycle time set in the master.
NO_SIO	<p>The device does not support the standard DI (SIO) mode.</p> <p>Remedy:</p> <ul style="list-style-type: none"> ▶ Select the IO-Link mode for this port.
NO_PD	<p>No process data available The connected device is not ready for operation.</p> <p>Remedy:</p> <ul style="list-style-type: none"> ▶ Check the configuration.
PDI_E	<p>The connected device reports invalid process data in accordance with IO-Link specification V1.0.</p>
PDI_H	<p>The connected device reports invalid process data in accordance with IO-Link specification V1.1.</p>
MD	<p>Missing device, no IO-Link device detected.</p> <p>Remedy:</p> <ul style="list-style-type: none"> ■ Check the IO-Link cable. ■ Change the device.
WD	<p>Wrong device detected: one or more parameters of the connected device (Vendor ID, Device ID, serial number) does not/do not match the data which are stored in the master for this device.</p> <p>Remedy:</p> <ul style="list-style-type: none"> ■ Change the device. ■ Adapt the master parameterization

Device status

Value	Meaning
0	Device works correctly
1	Maintenance event
2	Out-of-specification event
3	Functional check
4	Error
5...255	reserved

10 Operating

10.1 Evaluating process input data

Word no.	Bit no.															
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Basic																
0x00	-	-	-	-	DVS3	DVS2	DVS1	DVS0	-	-	-	-	IOL3	IOL2	IOL1	IOL0
IO-Link process input data																
0x01 ... 0x10	IO-Link port 1, structure depends on the channel parameterization (0...32 byte per channel)															
0x11 ... 0x20	IO-Link port 2, structure depends on the channel parameterization (0...32 byte per channel)															
0x21 ... 0x30	IO-Link port 3, structure depends on the channel parameterization (0...32 byte per channel)															
0x31 ... 0x40	IO-Link port 4, structure depends on the channel parameterization (0...32 byte per channel)															
Diagnostics																
DX channels/VAUX																
0x41	-	-	-	-	ERR DX3	ERR DX2	ERR DX1	ERR DX0	-	-	-	-	ERR VAUX 1 ch3	ERR VAUX 1 ch2	ERR VAUX 1 ch1	ERR VAUX 1 ch0
IO-Link port 1																
0x42	GEN- ERR	OVL	VHIG H	VLOW W	ULVE	LLVU	OTM P	PRME RR	EVT1	EVT2	PDIN V	HWE RR	DSER R	CFGE RR	PPE	-
0x43	IO-Link port 2, assignment similar to port 1															
0x44	IO-Link port 3, assignment similar to port 1															
0x45	IO-Link port 4, assignment similar to port 1															
IO-Link Events																
0x46	Port (1st Event)								Qualifier (1st Event)							
0x47	Event Code low byte (1st Event)								Event Code high byte (1st Event)							
...																
0x64	Port 16th Event)								Qualifier (16th Event)							
0x65	Event Code low byte (16th Event)								Event Code high byte (16th Event)							
Module status (status word)																
0x66	-	FCE	-	-	-	COM	V1	-	-	-	-	-	-	-	-	DIAG

Meaning of process data bits

Name	Value	Meaning
I/O data		
IOLx	Channel as digital input	
	0	No input signal at DI at C/Q channel (SIO)
	1	Input signal at DI at C/Q channel (SIO)
	Channel as digital output	
	0	No output signal at C/Q channel
	1	Output signal at C/Q channel
DVSx	Input value valid (Data Valid Signal)	
	0	The IO-Link data are invalid. Possible causes: <ul style="list-style-type: none"> ■ Sensor supply is below the admissible range. ■ IO-Link port is parameterized as simple digital input. ■ no device connected to the master ■ no input data received from the connected device (only valid for devices with an input data length > 0). ■ No reaction from the connected device to the sending of output data (only valid for devices with an output data length > 0). ■ The connected device sends an error "process input data invalid".
	1	The IO-Link data are valid.
IO-Link process input data	Process input data of the connected device The order of the IO-Link process input data can be changed via the parameter "Process input data mapping".	
Diagnostics	[▶ 111]	
IO-Link Events	[▶ 104]	
Module status	[▶ 112]	

10.2 Writing process output data

Word no.	Bit no.																			
	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0				
Basic																				
0x00	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	DXP3	DXP2	DXP1	DXP0
IO-Link process output data																				
0x01 ... 0x10	IO-Link port 1, structure depends on the channel parameterization (0...32 byte per channel)																			
0x11 ... 0x20	IO-Link port 2, structure depends on the channel parameterization (0...32 byte per channel)																			
0x21 ... 0x30	IO-Link port 3, structure depends on the channel parameterization (0...32 byte per channel)																			
0x31 ... 0x40	IO-Link port 4, structure depends on the channel parameterization (0...32 byte per channel)																			
VAUX1 monitoring																				
0x41	reserved												V1+ (pin 9)	V1+ (pin 7)	V1+ (pin 5)	V1+ (pin 3)				

Name	Value	Meaning
I/O data		
DXPx	DXP output (output level at C/Q pins (2, 4, 6, or 8 of the 10-pole terminal connector))	
	0	Output inactive
	1	Output active, max. output current 2 A
V1+ (pin x)	V1+-output (switching the 24 VDC sensor actuator supply VAUX1 at the V1+ pins (3, 5, 7 or 9 of the 10-pole terminal connector))	
	0	The 24 VDC sensor/actuator supply at Pin x is switched off.
	1	The 24 VDC sensor/actuator supply at Pin x is switched on.

10.3 LED displays

Every device displays the following statuses via LEDs:

- Group and bus errors

LED BUS	Meaning
Off	No voltage connected
Green	Active connection to a master
Flashing green 3x in 2s	ARGEE/FLC active
Green flashing (1 Hz)	Device is ready for operation
Red	IP address conflict, Restore mode active, F_Reset active or Modbus connection timeout
Red flashing	Wink command active
Red/green (1 Hz)	Autonegotiation and/or waiting for DHCP-/BootP-address assignment

LEDs ETH1 and ETH2	Meaning
Off	No Ethernet connection
Green	Ethernet connection established, 100 Mbps
Green flashing	Ethernet traffic, 100 Mbps
Yellow	Ethernet connection established, 10 Mbps
Yellow flashing	Ethernet traffic, 10 Mbps

10.4 Software diagnostic messages

The device provides the following software diagnostic messages:

- Vi overcurrent diagnostics
Overcurrent diagnostics for the sensor-/ actuator supply VAUX1
- IOL diagnostics
Diagnostic messages of the IO-Link channels if parameterized as digital in. or digital output.
- IO-Link master diagnostics
The IO-Link master reports problems within the IO-Link communication.
- IO-Link device diagnostics
The device diagnostics map the IO-Link Event Codes (according to the IO-Link specification) sent from the IO-Link devices to the diagnostic telegram of the master.
Event Codes can be read from the connected devices by using appropriate device tools (e.g. IODD-Interpreter).
Further information concerning the IO-Link Event Codes and their meaning can be found in the IO-Link specification or in the documentation of the connected devices.

10.4.1 Status- and control word

Status word

EtherNet/IP/ Modbus	Modbus PROFINET	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Byte 0	Byte 1	-	-	-	-	-	-	ARGEE	DIAG
Byte 1	Byte 0	-	FCE	-	-	-	COM	V1	-

Bit	Description
COM	Internal error The device-internal communication is disturbed.
DIAG	Diagnostic messages at the device
FCE	The DTM Force Mode is activated, which means, the actual output values may no match the ones defined and sent by the field bus.
V1	V1 too low (< 18 V DC).

The status word is mapped into the module's process data.

In EtherNet/IP the mapping can be deactivated via the Gateway Class (VSC 100).



NOTE

Activating or deactivating the status and control word modifies the process data mapping.

Control word

The control word has no function.

10.4.2 Diagnostic telegram

Channel	Byte no.	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
V1		V1 overcurrent diagnostics							
	0	-	-	-	-	ERR ch3	ERR ch2	ERR ch1	ERR ch0
	1	-	-	-	-	-	-	-	-
IO-Link		Device diagnostic messages				Master diagnostics			
IO-Link port 1	0	EVT1	EVT2	PD_INV	HW_ERR	DS_ERR	CFG_ERR	PPE	-
	1	GEN_ERR	OLV	V_HIGH	V_LOW	ULVE	LLVU	OTEMP	PRM_ERR
IO-Link port 2	2...3	Assignment similar to IO-Link port 1							
IO-Link port 3	4...5								
IO-Link port 4	6...7								



NOTE

The process data invalid diagnostic (PDINV) can be sent from both devices, IO-Link master or IO-Link device.

Meaning of Diagnostic Bits

Bit	Meaning
IO-Link as digital input or digital output	
ERR Chx	Error at channel
IO-Link master diagnostics	
CFGER	Wrong or missing device The connected device does not match the channel configuration or there is no device connected to the channel. This diagnostic message depends on the parameterization of the channel.
DSER	Data storage error Possible causes: <ul style="list-style-type: none"> ■ Data storage mismatch: IO-Link device in accordance with IO-Link V1.0 connected. The data storage buffer contains data of another device. ■ Overflow of the data storage buffer ■ The connected device may be locked for parameter changes or for data storage.
PPE	Port parameterization The port parameters are inconsistent. The device parameterization via GSD is active, but not working. Possible causes: <ul style="list-style-type: none"> ■ The IO-Link-master did not receive GSDML-parameters for a connected device. The connected device was not parameterized by a PROFINET PLC via GSDML. ■ The port is in operation mode "IO-Link without validation" or "DI". These modes do not allow parameterization via GSDL file. ■ Data storage mode is active. The parameter is not set to "deactivated, clear". A device parameterization via GSDML is not possible with activated data storage. ■ Vendor or Device ID are "0". The connected device can not be identified and is thus not parameterizable.

Bit	Meaning
IO-Link master/device diagnostics	
PDINV	<p>Evaluating Process Input Data The IO-Link master or the IO-Link device report invalid process input data. The connected device is not in status "operate", which means, it is not ready for operation. Possible sources:</p> <ul style="list-style-type: none"> ■ The connected device does not match the configured one, additional diagnostic message Wrong or missing device. ■ Diagnostic message Process input data invalid because the process value can not be measured (depends on the IO-Link device).
IO-Link device diagnostics	
	The IO-Link device diagnostics depend on the IO-Link device used. For more detailed information on the diagnoses, please refer to the documentation for the IO-Link device.
EVT1	<p>Maintenance events A Maintenance Event in accordance with the IO-Link specification occurred, maintenance necessary.</p>
EVT2	<p>Out-of-specification events An Out-of-Specification Event in accordance with the IO-Link specification occurred.</p>
GENERR	<p>Common error The device sends an error (device status 4, in accordance with IO-Link specification), which is not clearly specified. Read out the device Event Codes in order to be able to specify the error more precisely.</p>
HWER	<p>Hardware error General hardware error or device malfunction of the connected device</p>
LLVU	<p>Lower limit value underrun The process value lies under the parameterized measurement range or the chosen measurement range has been chosen too high.</p>
OLV	<p>Overload The connected device detected an overload.</p>
OTMP	<p>Overtemperature A temperature diagnosis is available on the connected device.</p>
PRMERR	<p>Parameterization error The connected device reports a parameterization error (loss of parameters, no parameter initialization, etc.).</p>
ULVE	<p>Upper limit value exceeded The process value exceeds the parameterized measurement range or the chosen measurement range has been chosen too low.</p>
VLOW	<p>Undervoltage One of the voltages at the connected device is below the defined range.</p>
VHIGH	<p>Overvoltage One of the voltages at the connected device is below the defined range.</p>

10.4.3 PROFINET diagnostics

Module diagnostics (slot 0 according to configuration tool)	PROFINET Diagnostics	
	Error code	Channel
Undervoltage V1	0x0002	0
Undervoltage V2	0x0002	1

VAUX1/VAUX2 diagnostics (slot 1, according ot configuration tool)	PROFINET Diagnostics	
	Error code	Channel
Overcurrent VAUX1 (pin 3)	0x0100	0
Overcurrent VAUX1 (pin 5)	0x0101	
Overcurrent VAUX1 (pin 7)	0x0102	
Overcurrent VAUX1 (pin 9)	0x0103	

IO-Link port diagnostics	PROFINET Diagnostics	
IO-Link port 1 (Slot 2, according to configuration tool)	Error code	Channel
Undervoltage (VLOW)	0x0002	0
Overcurrent (VHIGH)	0x0003	
Overload (OVL)	0x0004	
Over temperature (OTMP)	0x0005	
Wrong or missing device (CFGERR)	0x0006	
Upper limit value exceeded (ULVE)	0x0007	
Lower limit value underrun (LLVU)	0x0008	
Data storage error (DSER)	0x0009	
Process input data invalid (PDINV)		
Maintenance events (EVT1)		
Out of specification error (EVT2)		
Port parameterization error (PPE)		
Parameterization error (PRMER)	0x0010	
Hardware error (HWER)	0x0015	
IO-Link port 2 (Slot 3, according to configuration tool)		
Similar to port 1		2
IO-Link port 3 (Slot 4, according to configuration tool)		
Similar to port 1		4
IO-Link port 4 (Slot 5, according to configuration tool)		
Similar to port 1		6

10.5 Using the data storage mode

Data storage mode



NOTE

Data storage mode is only available for devices complying with the IO-Link specification V1.1.

In the IO-Link master, the data storage mode can be set using the parameter "data storage mode".

- 00 = activated
- 01 = overwrite
- 10 = read in
- 11 = deactivated, clear

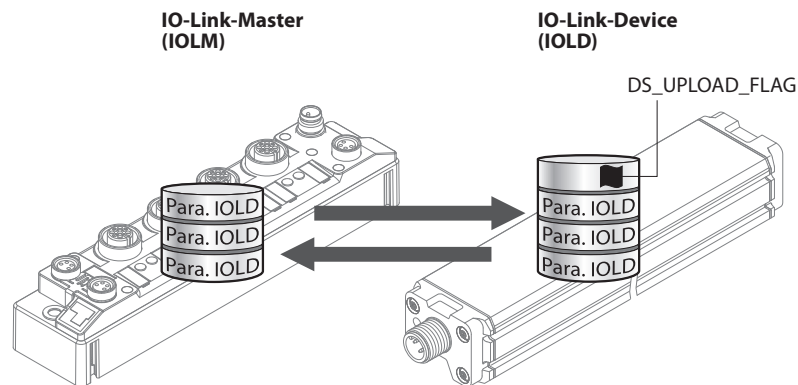


Fig. 50: Data storage mode – general principle, Para. IOLD = parameters of the IO-Link device

A change of parameters in the device is indicated by the status of the DS_UPLOAD_FLAG bit:

- 0 = no changes in the device's parameter set
- 1 = changes in the device's parameter set (e. g. via DTM, at the device, etc.)

10.5.1 Parameter "data storage mode" = activated

The synchronization of the parameter sets is bidirectional.

The actual data set (master or device) is valid:

The following applies:

- The data set in the device is actual, if DS_UPLOAD_FLAG = 1.
- The data set in the Master is actual, if DS_UPLOAD_FLAG = 0.

Use Case 1: Parameterizing the Device Using e.g. a DTM

- ✓ The IO-Link device is already installed in the system and connected to the master.
- ▶ Parameterizing the device via DTM.
- ⇒ DS_UPLOAD_FLAG = 1, parameter set in the device changed.
- ⇒ The parameter data are transferred from the new IO-Link device to the IO-Link master.

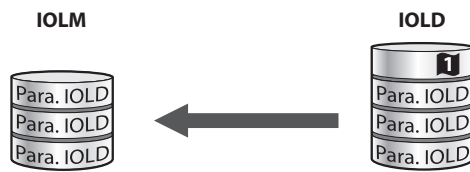


Fig. 51: Data storage mode activated – parameter set in the device changed

Use case 2: replace a defective device with a device in the delivery state.

- ✓ The **new** IO-Link device has **not** been connected to the master before.
- ▶ The parameters of the new device remain unchanged, DS_UPLOAD_FLAG = 0.
- ⇒ The parameter data of the defective device are transferred from the IO-Link master to the new IO-Link device.

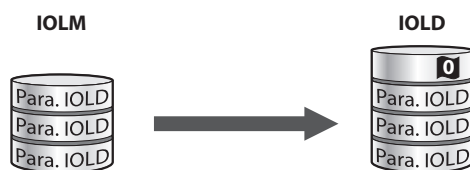


Fig. 52: Data storage mode activated – parameter set in the device unchanged

Use case 3: replace a defective device with a device with unknown (changed) parameters

- ✓ The **new** IO-Link device has **not** been connected to the master before.
- ▶ The parameters of the new device remain unchanged, DS_UPLOAD_FLAG = 1.
- ⇒ The parameter data are transferred from the new IO-Link device to the IO-Link master.

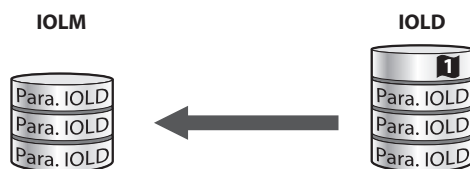


Fig. 53: Data storage mode activated – parameter set in the device changed



NOTE

If device replacement is necessary when data storage is activated, an IO-Link replacement device with unknown parameter data should be reset to its factory settings before connection to the IO-Link master.

Turck IO-Link devices can be reset to factory settings via a system command using a generic IO-Link-DTM and the device-specific IODD. For the reset of third party devices, please read the corresponding manufacturer documentation.

10.5.2 Parameter "data storage mode" = read in

- The data set in the device is **always** the reference data set.
- The synchronization of the parameter sets is unidirectional towards to the master.
- The status of the DS_UPLOAD_FLAG is ignored.

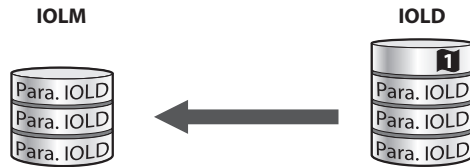


Fig. 54: Data storage mode = read in – parameter set in the device changed

10.5.3 Parameter "data storage mode" = overwrite

- The data set in the master is **always** the reference data set.
- The synchronization of the parameter sets is unidirectional towards to the device.
- The status of the DS_UPLOAD_FLAG is ignored.

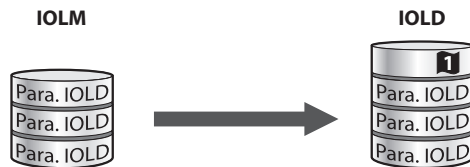


Fig. 55: Data storage mode = overwrite – parameter set in the master changed

10.5.4 Parameter "data storage mode" = deactivated, clear

- The data set in the master is deleted.
- The synchronization of parameter sets is deactivated.



Fig. 56: Data storage mode deactivated – no synchronization

11 Troubleshooting

If the device does not work as expected, proceed as follows:

- ▶ Exclude environmental disturbances.
- ▶ Check the connections of the device for errors.
- ▶ Check device for parameterization errors.

If the malfunction persists, the device is faulty. In this case, decommission the device and replace it with a new device of the same type.

11.1 Eliminate parameterization errors

DXP channels

Error	Possible causes:	Remedy
Digital output does not switch	The IO-Link port was not parameterized as a DX channel.	▶ Set the channel to DX via the Operating mode parameter.

IO-Link channels

Diagnostics	Possible causes:	Remedy
Data storage error	IO-Link device according to IO-Link V1.0 connected IO-Link devices in accordance with IO-Link specification V1.0 do not support data storage.	▶ Set parameter Data storage mode to deactivated, clear . ⇒ Data storage remain deactivated.
	The data storage buffer contains data of another device.	▶ Set parameter Data storage mode to deactivated, clear . ▶ Re-activate the data storage if necessary.
Wrong or missing device	The connected device does not match the configured one (wrong vendor-ID, device-ID etc.)	▶ Adapt the parameterization of the IO-Link port (Vendor ID, Device ID, etc.) at the master. The parameterization can be done manually via DTM, the web server or similar or by teaching the master using the IO-Link-Call (port 0 function, sub index 67: Teach mode).
Process input data invalid	Certain IO-Link devices send a process input data invalid diagnosis if the process value cannot be measured.	▶ Deactivate the sending of the diagnosis for the IO-Link port with the parameter Process input data invalid → No diagnostic generated .

12 Maintenance

Ensure that the plug connections and cables are always in good condition.

The devices are maintenance-free, clean dry if required.

12.1 Carry out firmware update via FDT/DTM

The firmware of the device can be updated via FDT/DTM. The PACTware FDT frame application, the DTM for the device and the current firmware are available as downloads free of charge from www.turck.com.



NOTICE

Interruption of the power supply during the firmware update

Risk of device damage due to faulty firmware update

- ▶ Do not interrupt the power supply during the firmware update.
- ▶ During the firmware update do not reset the power supply.

Example: update the firmware with the PACTware FDT frame application

- ▶ Launch PACTware.
- ▶ Right-click **Host PC** → **Add device**.

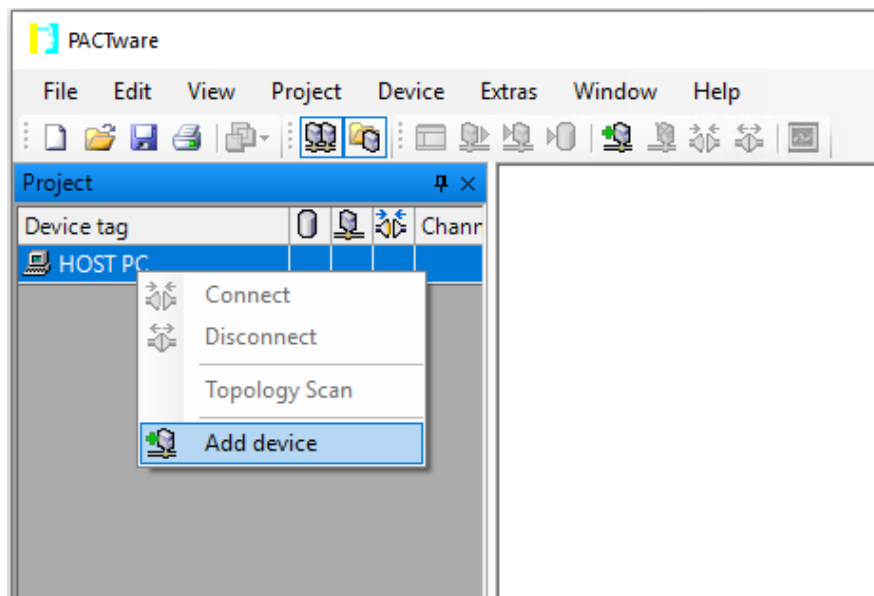


Fig. 57: Adding a Device in PACTware

- ▶ Select BL Service Ethernet and confirm with OK.

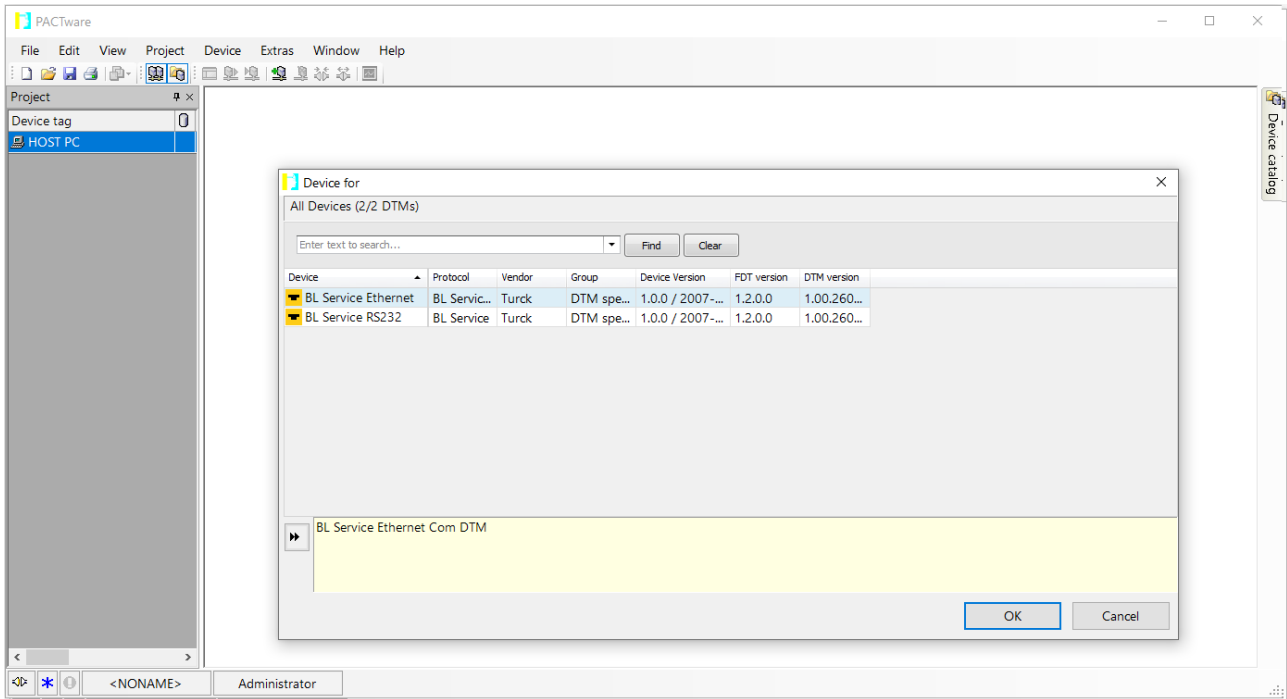


Fig. 58: Selecting the Ethernet interface

- ▶ Double-click the connected device.
- ⇒ PACTware opens the bus address management.

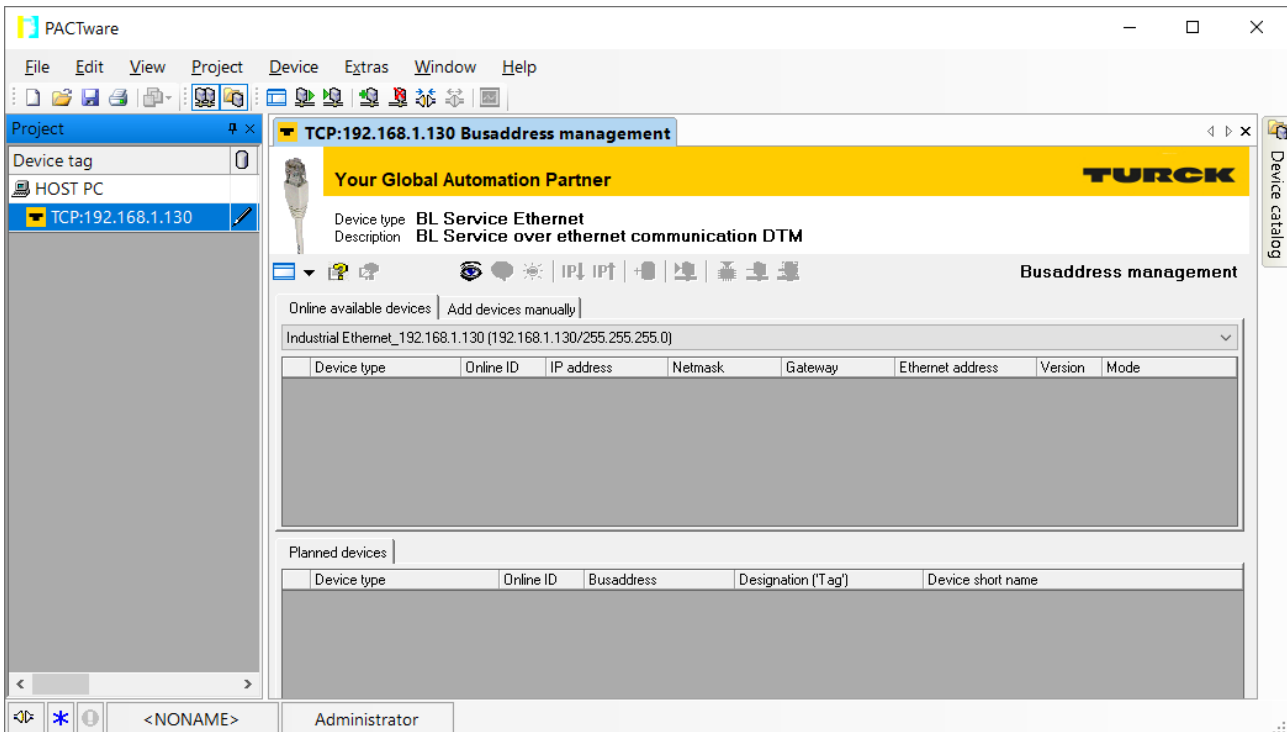


Fig. 59: Opening the busaddress management

- ▶ Search for connected Ethernet devices: Click the **Search** icon.
- ▶ Select the required device.

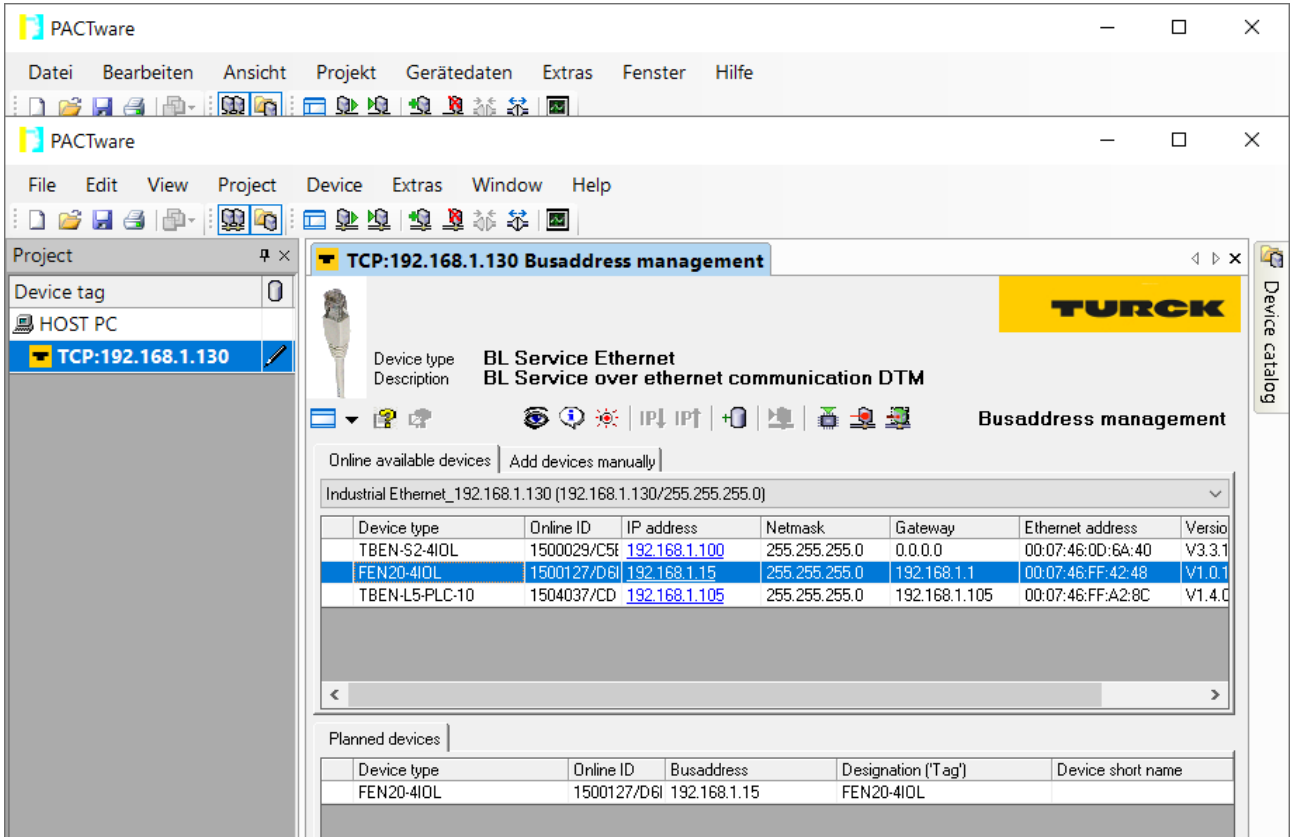


Fig. 60: Selecting the device

- ▶ Click **Firmware Download** to start the firmware update.

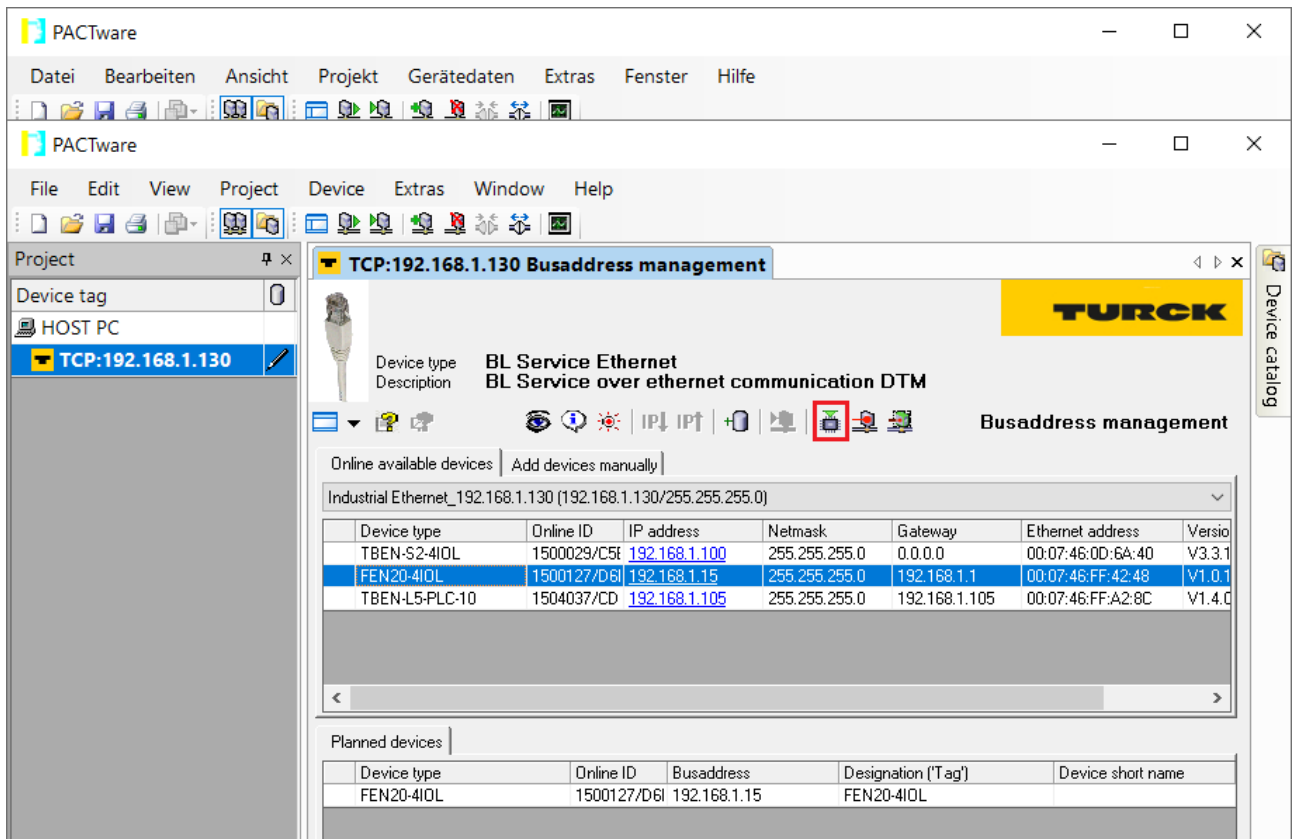


Fig. 61: Starting the firmware update

- ▶ Select the storage location and confirm with **OK**.
- ⇒ PACTware shows the progress of the firmware update with a green bar at the bottom of the screen.

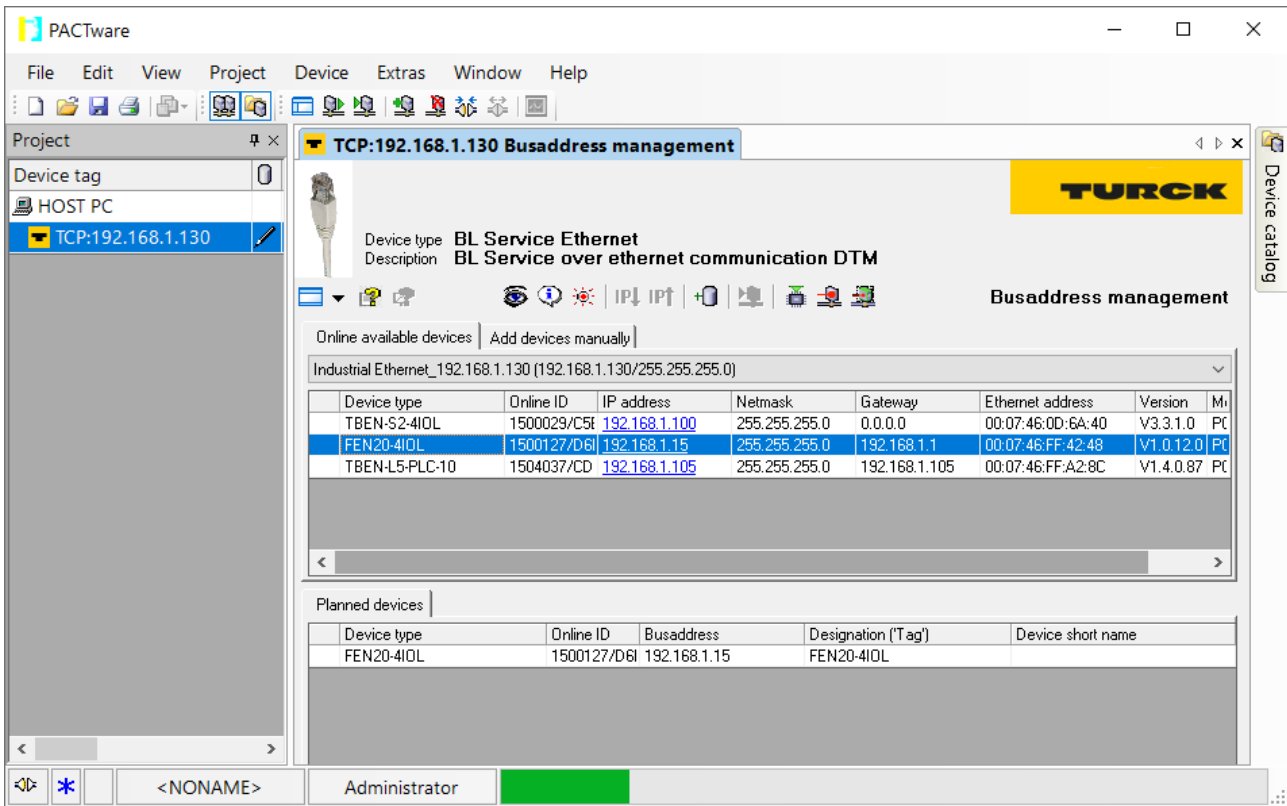


Fig. 62: Firmware update in progress

13 Repair

The device must not be repaired by the user. The device must be decommissioned if it is faulty. Observe our return acceptance conditions when returning the device to Turck.

13.1 Returning devices

Returns to Turck can only be accepted if the device has been equipped with a Decontamination declaration enclosed. The decontamination declaration can be downloaded from <https://www.turck.de/en/retoure-service-6079.php> and must be completely filled in, and affixed securely and weather-proof to the outside of the packaging.

14 Disposal



The devices must be disposed of correctly and must not be included in normal household garbage.

15 Technical data

Technical data	
Power supply	
Power supply	24 VDC, from V1, Class 2 power supply unit necessary
Permissible range	18...30 VDC
<ul style="list-style-type: none"> ■ IO-Link 	<ul style="list-style-type: none"> ■ 20,4 ... 28.8 VDC
Total current	max. 4 A per voltage group V1 + V2 max. 5,5 A at 70 °C per module
Operating current	100 mA V2: min.10 mA, max. 115 mA
Sensor/actuator supply	Supply from terminal V1+ ₁ ...V1+ ₄ , max. 1 A per screw terminal, total max. 4 A
Potential isolation	500 V galvanic zone-zone and zone-ethernet, voltage proof up to 500 VDC
Connectors	
Ethernet	
Power supply	Terminal screw connector, 3-pole
IO-Link, digital in-/outputs	Screw connection, 10-pole terminal connection, tightening torque max. 0.5 Nm
System data	
Transmission rate	10 Mbps, 100 Mbps, full/half duplex, autonegotiation, autocrossing
Fieldbus connection technology	2 × RJ45
Protocol detection	Automatic
Web server	192.168.1.254 (default)
Service interface	Ethernet
Field Logic Controller (FLC)	
Supported from firmware version	1.0.11.0
Released as of ARGEE version	1.0.10.0
Modbus TCP	
Address assignment	Static IP, DHCP
Supported Function Codes	FC1, FC2, FC3, FC4, FC5, FC6, FC15, FC16, FC23
Number of TCP connections	6
Input data	max. 1 register
Input register, start address	0 (0x0000)
Output data	max. 1 register
Output register, start address	2048 (0x0800)
Local port	Port 502, fix setting
EtherNet/IP	
Address assignment	according to EtherNet/IP standard
Device Level Ring (DLR)	Supported
Quick Connect (QC)	< 0 ms
Number of Class 1 (CIP) connections	6

Technical data	
Input Assembly Instances	103, 120, 121, 122, 123, 124, 125
Number of input bytes	8
Output Assembly Instances	104, 150, 151, 152
Number of output bytes	4
Configuration Assembly Instance	106
Number of configuration bytes	0
PROFINET	
PROFINET specification	V 2.35
Conformance Class	B (RT)
Address assignment	DCP
MinCycle Time	1 ms
Fast Start-Up (FSU)	< 150 ms
Diagnostics	according to PROFINET Alarm Handling
Topology detection	Supported
Automatic address setting	Supported
Media Redundancy Protocol (MRP)	Supported
Digital inputs	
Number of channels	4 at C/Q
Input type	PNP
Switching threshold	EN 61131-2 type 3, PNP
Signal voltage, low level	< 5 V
Signal voltage, high level	> 11 V
Low level signal current	< 1.5 mA
High-level signal current	> 2 mA
Input delay	2.5 ms
Digital outputs	
Number of channels	4 at C/Q
Output type	PNP
Output voltage	24 VDC
Output current per channel	Max. < 400 mA
IO-Link	
Number of channels	4
IO-Link specification	Version 1.1
IO-Link port type	Class A at C0...C3
Frame type	Supports all specified frame types
Transmission rate	4.8 kbps (COM 1) 38.4 kbps (COM 2) 230.4 kbps (COM 3)
Mounting	
Type of mounting	Via 2 mounting holes
Standard/Directive conformity	
Vibration test	According to EN 60068-2-6
Acceleration	Up to 20 g

Technical data	
Shock test	According to EN 60068-2-27
Drop and topple	According to IEC 60068-2-31/IEC 60068-2-32
Electro-magnetic compatibility	According to EN 61131-2
Approvals and certificates	cULus, contamination level 2, class 2 power supply necessary
General information	
Dimensions (B × L × H)	55 × 62.5 × 30 mm
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Protection class	IP20
MTTF	160 years acc. to SN 29500 (Ed. 99) 20 °C
Housing material	PA6-GF30
Housing color	Black

TURCK

Over 30 subsidiaries and over
60 representations worldwide!

100009607 | 2019/12



www.turck.com