


技术数据

外壳材料	镀锌膜
电气连接	接插件, M12 × 1
	8-针
轴轴向负载能力	40 N
轴径向负载能力	80 N
环境条件	
工作温度	-40...+85 °C
抗震动性(EN 60068-2-6)	300 m/s ² , 10...2000 Hz
抗冲击性(EN 60068-2-27)	3000 m/s ² , 6 ms
防护等级	IP67
防护等级 (轴型 / 轴套)	IP67

附件


RA-BC-20-10-12 100048783



带铝制轮毂的波纹管联轴器Ø 20 mm ; d1 = 10 mm , d2 = 12 mm

● 2.5 mm
1.2 Nm


RA-BC-20-08-12 100049106



带铝制轮毂的波纹管联轴器Ø 20 mm ; d1 = 8 mm , d2 = 12 mm

● 2.5 mm
1.2 Nm


RA-SDC-30-10-12 100048793



弹性盘联轴器Ø 30 mm , d1 = 10 mm , d2 = 12 mm

● 2.5 mm
1.2 Nm


RA-BC-20-12-12 100048784



带铝制轮毂的波纹管联轴器Ø 20 mm ; d1 = 12 mm , d2 = 12 mm

● 2.5 mm
1.2 Nm


RA-BC-E-20-10-12 100048788



不锈钢波纹管联轴器Ø 20 mm ; d1 = 10 mm , d2 = 12 mm

● 2.5 mm
0.7 Nm

RA-HC-25-10-12 100048797




铝制螺旋联轴器Ø 25 mm ; d1 = 10 mm , d2 = 12 mm

● 2.5 mm
1.2 Nm

附件

尺寸图	型号	货号	
	RKC8T-2/TXL	6625142	连接线缆, M12母头接插件, 直式8针, 线缆长度2 m, 护套材质PUR, 黑色; cULus认证

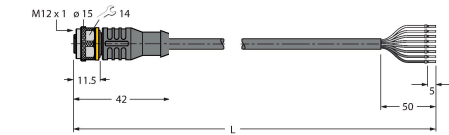

尺寸图	型号	货号	
	WKC8T-2/TXL	6625145	连接线缆，M12母头接插件，弯式8针， 线缆长度2 m，护套材质PUR，黑色； cULus认证

