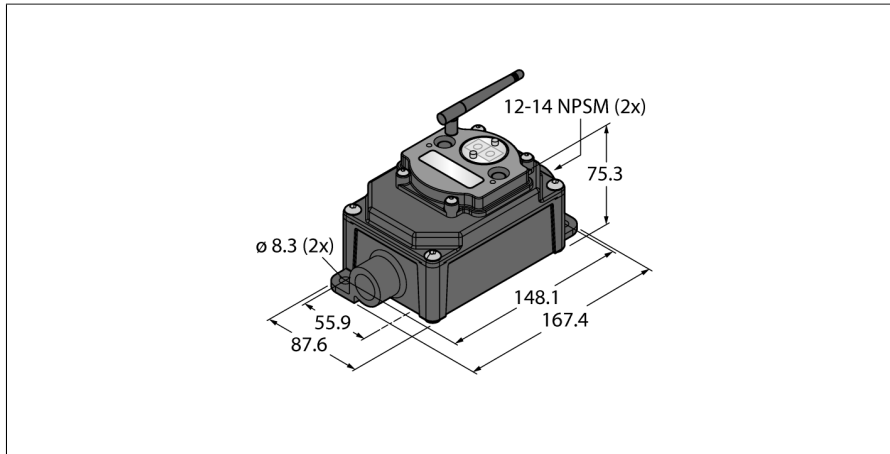


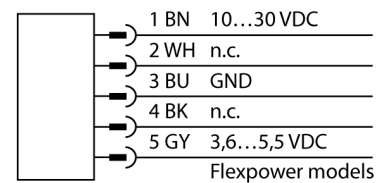
# Radio Transmission System Star Topology Node (FlexPower) DX80N2X1S-P1E



- External antenna (RG58 RP-SMA connection)
- Integrated signal strength indicator
- Configuration via DIP switch
- Deterministic data transfer
- Frequency hopping FHSS
- Time Division Multiplex Access TDMA
- Transmission power: 63 mW, 18 dBm conducted, ≤ 20 dBm EIRP
- Internal battery
- Inputs: 2 × NPN, 2 × 0...20 mA or 0...10V, 2 × Thermistor
- Outputs: 2 × NMOS

Type	DX80N2X1S-P1E
ID	3018089
<b>Wireless data</b>	
Type of radio	short-range
Installation	stationary
Topology	Star topology
Function	Star topology
Device type	Node
Frequency band	2.4-GHz ISM band
Frequency range	2.402 - 2.483 GHz
Number of radio channels	50
Channel width	1 MHz
Spread spectrum technology	FHSS (Frequency Hopping Spread Spectrum)
Single-Carrier Residence Time	7.8 ms
Response time typical	< 1000 ms
Output power ERP	18 dB/65 mW
Output power EIRP	20 dB/100 mW
<b>I/O data</b>	
Number of channels	2/4
Input type	NPN/0...20 mA or 0...10 V/thermistor
Number of channels	2
Output type	NMOS
<b>Electrical data</b>	
Runs with battery	Yes
Operating voltage U <sub>s</sub>	3.6...5.5 VDC
Power-on indication	LED, Green

## Wiring Diagram



## Functional principle


The DX80 system forms a radio-based network for wireless, bidirectional transmission of sensor signals in a star topology. It consists of a gateway that transmits the I/O signals to the control system and to as many as 47 nodes, with each node taking up to 12 sensors/actuators. The system is configured via the gateway with the included software. You can supply different components with DC voltage either via the power grid or self-sufficiently via battery or solar cell. Depending on the type of gateway used, simultaneous transmission of different measured and switching values is possible as well as communication via RS485 interface.

## Norms:




FCC-ID UE300DX80-2400- This device complies with FCC para. 15, subpara. C, 15.247  
 ETSI/EN: In compliance with EN 300 328: V2.2.2 (2019-02)  
 IC: 7044A-DX8024  
 Radiation protection 10 V/m for 80–2700 MHz acc. to EN 61000-6-2  
 Shock and vibration resistance: IEC 68-2-6 and IEC 68-2-7

Mechanical data	
Design	Rectangular, DX80
Housing material	Plastic, PC
Antenna connection	RP-SMA female connector
Ambient temperature	-20...+65 °C
Relative humidity	0...95%
Protection class	IP65
Tests/approvals	
Approvals	ATEX II 3 G
Approvals	CE
	CSA
	ATEX
Device marking	II 3 G Ex nA IIC T4 Gc
Ex approval acc. to conformity certificate	LCIE 10 ATEX 1012 X



## Accessories

Type code	Ident no.		Dimension drawing
SMBDX80DIN	3077161	Mounting panel for DIN rail, suited for CP80, DX80, K80, Q80, operating temperature: -20...90 °C	
BWA-BATT-001	3078261	Lithium-ion battery, D cell, 3.6 VDC, 19,000 mAh, American supplier, GGV UN3090/CL9	<p>Keine Maßzeichnung vorhanden!</p> <p>No drawing available!</p>

## Function accessories

Type code	Ident no.		Dimension drawing
BWA-2O6-A	3081081	External antenna 6 dBi, N-female	
BWA-2O8-A	3081080	External antenna 8.5 dBi, N-female	
BWA-2O2-C	3077816	Internal antenna 2 dBi, RP-SMA male, standard	

## Function accessories

Type code	Ident no.		Dimension drawing
BWA-205-C	3077817	Internal antenna 5 dBi, RP-SMA male	 <p>Technical drawing of the BWA-205-C antenna. It shows a vertical antenna with a total height of 235 units. The top section has a diameter of 7 units. The bottom section has a diameter of 13 units (labeled as <math>\varnothing 13</math>). The antenna is mounted on a 90-degree RP-SMA male connector with a height of 30 units.</p>
BWA-207-C	3077818	Internal antenna 7 dBi, RP-SMA male	 <p>Technical drawing of the BWA-207-C antenna. It shows a vertical antenna with a total height of 166 units. The bottom section has a diameter of 13 units (labeled as <math>\varnothing 13</math>). The antenna is mounted on a 90-degree RP-SMA male connector with a height of 30 units.</p>