
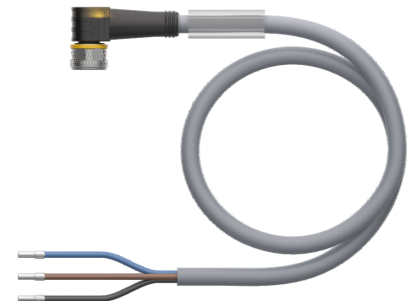


# PKW3M-P7X2-5/TXG

## Actuator and Sensor Cable, PUR – Connection Cable

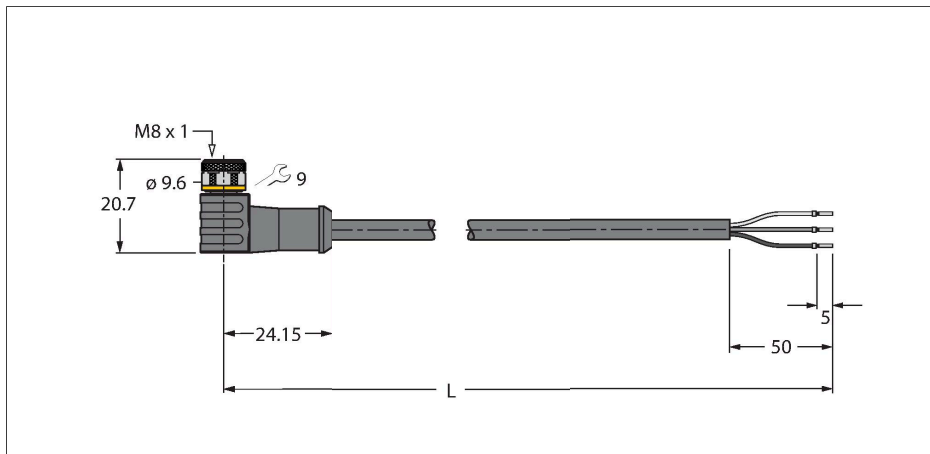

### Technical data


|                                 |                                                              |
|---------------------------------|--------------------------------------------------------------|
| Type                            | PKW3M-P7X2-5/TXG                                             |
| ID                              | 6629605                                                      |
| Connector A                     | Female, M8 × 1, Angled                                       |
| Number of pins                  | 3                                                            |
| Contacts                        | Brass, CuZn, Gold-plated                                     |
| Contact carriers                | Plastic, TPU, Black                                          |
| Connector body                  | Plastic, TPU, Translucent                                    |
| Coupling nut/screw              | Brass, CuZn, Nickel-plated                                   |
| Seal                            | Plastic, FPM/FKM                                             |
| Tightening torque (range)       | 0.5 ... 0.6 Nm<br>(observe max. torque of mating connector!) |
| LED display                     | dual LED                                                     |
| Display operating voltage       | LED, Green                                                   |
| Display switch state            | LED, Yellow                                                  |
| Mechanical lifespan             | > 100 Mating cycles                                          |
| Pollution degree                | 3                                                            |
| Protection class                | IP67, IP69K, Only in screwed condition                       |
| Cable                           |                                                              |
| Cable diameter                  | Ø 4.1 mm ±0.20                                               |
| Cable length                    | 5 m                                                          |
| Cable jacket                    | PUR, Gray                                                    |
| Core insulation                 | PP                                                           |
| Core cross-section              | 3 x 0.34 mm <sup>2</sup>                                     |
| Arrangement of strands          | 42 x 0.1 mm                                                  |
| Core colors                     | BN, BU, BK                                                   |
| Electrical properties at +20 °C |                                                              |
| Rated voltage                   | 30 V <sub>DC</sub>                                           |

### Features



- Female M8, angled, 3-pin
- With 2-color LED (PNP, yellow, green)
- Jacket material: PUR
- Jacket color: gray
- Suitable for drag chain use
- Resistant to chemicals, UV radiation and oils
- Flame retardant (FT2 acc. to UL 1581, IEC 60332-2-2)
- Resistant to welding sparks
- Free from halogen, silicone, PVC and LABS
- Particularly resistant to abrasion
- Protection class: IP67, IP69K
- Cable length: 5.0 m


### Cable Cross-Section

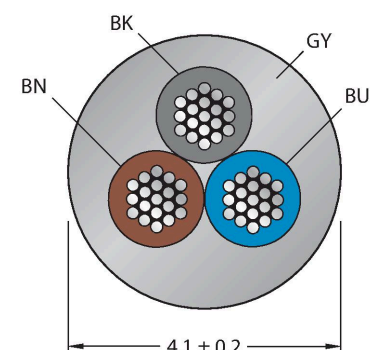


### Contact assignment

Technical data

|                                          |                 |
|------------------------------------------|-----------------|
| Test voltage                             | 2000 V          |
| Current                                  | 4 A             |
| Insulation resistance                    | > 30.5 MΩ/km    |
| forward resistance                       | max. 57 Ω/km    |
| Mechanical and chemical properties       |                 |
| Bending radius (stationary installation) | ≥ 5 x Ø         |
| Bending radius (flexible use)            | ≥ 10 x Ø        |
| Bending cycles                           | ≥ 5 million     |
| Admissible acceleration                  | max. 5 m/s²     |
| Admissible travel path, horizontal       | 5 m (at 5 m/s²) |
| Admissible travel path, vertical         | 2 m (at 5 m/s²) |
| Admissible traversing speed              | 3.3 m/s         |
| Torsional stress                         | ± 180 °/m       |
| Ambient temperature (fixed)              | -50...+80 °C    |
| Ambient temperature (mobile)             | -25...+80 °C    |
| Ambient temperature (drag chain)         | -25...+60 °C    |
| Approvals                                | cULus           |



Circuit Diagram




Accessories

TORQUE-WRENCH-SET-AS6936170

Torque wrench set; handles with adjustable torque 0.4-1.0 Nm, torque wrench for M8 (SW9), fork wrench for M12 (SW 14)

BLANK-LABEL-FOR-CORDSETS-TEL-TXL6936206

Label for TEL and TXL cables, length: 18 mm, height: 4 mm, material: polycarbonate (PC), color: white, halogen-free and flame-retardant






HAS5131-06905402

Field-wireable male connector, M8 x 1, straight, 3-pin, insulation piercing connection, cable feedthrough 2.5 to 5.1 mm, core cross-section/terminal capacity 0.14 to 0.34 mm², plastic housing, metal nut


BS5133-06901012

Konfektionierbarer Stecker, M8 x 1, gerade, 3-polig, Schraubklemmanschluss, Leitungsdurchlass 3.5 bis 5.0 mm, Adernquerschnitt/ Klemmvermögen 0.14 bis 0.50 mm², Kunststoffgehäuse, Metallüberwurfschraube

|                                                                                                                                                                                                                                                                                                     |         |                                                                                                                                                                                                                                                                                                    |         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| HS5131-0                                                                                                                                                                                                                                                                                            | 6902710 | HS5231-0                                                                                                                                                                                                                                                                                           | 6902810 |
|  <p>Field-wireable male connector, M8 × 1, straight, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm<sup>2</sup>, plastic housing, metal nut</p> |         |  <p>Field-wireable male connector, M8 × 1, angled, 3-pin, pressfit technology, cable feedthrough 4.0 to 5.0 mm, core cross-section/terminal capacity 0.14 to 0.34 mm<sup>2</sup>, plastic housing, metal nut</p> |         |

|                                                                                   |                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FW-PRKPM0320-SA-S-0406                                                            | 100002292                                                                                                                                                                                                                    |
|  | Field-wireable female connector, M8 × 1, straight, 3-pin, screw terminal connection, cable feedthrough 4.0 to 5.5 mm, core cross-section/terminal capacity 0.14 to 0.5 mm <sup>2</sup> , plastic housing, metal coupling nut |

Accessories

| Dimension drawing                                                                   | Type                  | ID        |                                                                                                                                                                            |
|-------------------------------------------------------------------------------------|-----------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | LABEL-HOLDER-FLEX-PVC | 100048170 | PVC label holder for identification of extension cables (TEL/TXL product series); for cable diameters: min. 5 mm; dimensions 4 × 18 mm; delivery unit: 50 pcs. per package |