
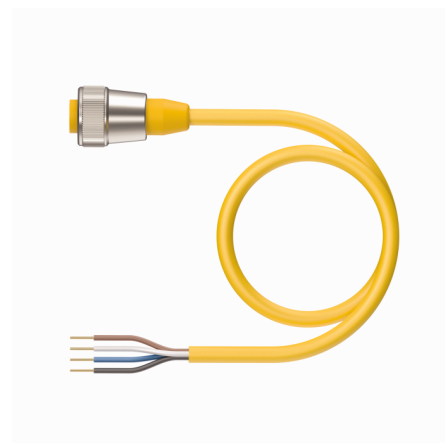


Actuator and Sensor Cable Connection Cable RKM 40-2M

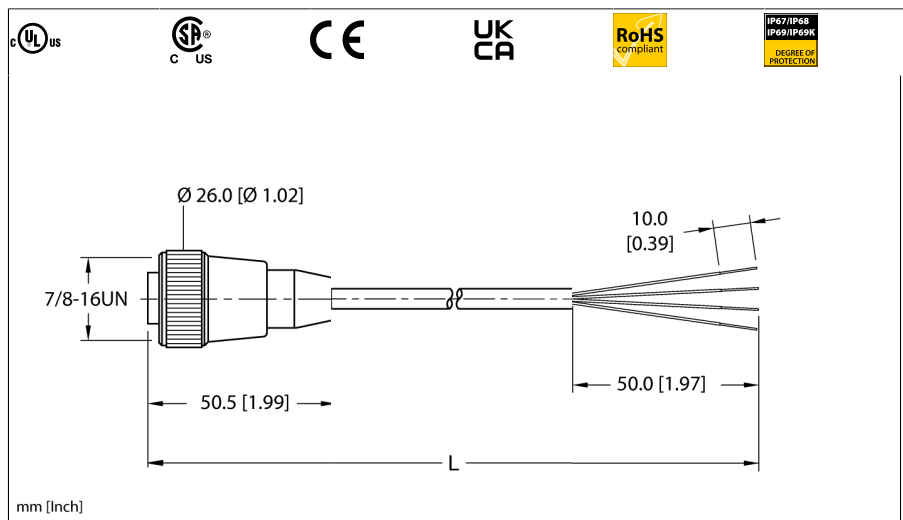


- 7/8" female connector, straight, 4-pin
- Instrumentation Tray Cable
- PVC jacket, yellow, 4 × 18 AWG
- UV resistant
- -40 °C cold bending strength
- Oil resistant
- Fire classes: UL 1685 FT4, UL1061, CSA FT4
- Flexlife and C-Track approved

Type	RKM 40-2M
ID	U2043

Connector A	Female, 7/8"-16 UN, Straight
Number of pins	4
Contact carriers	Plastic, TPU, Yellow
Connector body	Plastic, TPU, Yellow
Coupling nut/screw	Brass, CuZn, Nickel-plated
Tightening torque	2 Nm
Mechanical lifespan	> 100 Mating cycles
Pollution degree	3
Protection class	IP67, IP68, IP69, IP69K
	NEMA: 1, 3, 4, 6P, 12

Cable	
Cable ID	RF50548
Number of cores	4
Cable diameter	Ø 6.73mm
Cable length	2 m, (+ 50 mm or 4 % of the length/-0.0, depending on which value is larger) m
Cable jacket	PVC, Yellow
Conductor diameter	0.076 "
Conductor material	TC (tinned copper)
Core insulation	PVC
Core cross-section	4 x 18 AWG [Similar to 0.75 mm²]
Arrangement of strands	19 x 0.0092"
Core colors	BN, WH, BU, BK
Electrical properties at +20 °C	
Rated voltage	600V
Current	9AA



Circuit Diagram

1)	BN
2)	WH
3)	BU
4)	BK

Mechanical and chemical properties	
Bending radius (stationary installation)	$\geq 5 \times \varnothing$
Bending radius (flexible use)	$\geq 10 \times \varnothing$
Cold flexural strength	-40 °C
Bending cycles 20 x $\varnothing$	10 million cycles
	When correctly installed at 20 °C, 50 % RH and a cycle speed of ≤ 0.5 cycles per second.
C-track	Yes
Ambient temperature (fixed)	-40...+105°C
Ambient temperature (mobile)	5...+105°C
Ambient temperature during installation	-10...+105 °C

Approval

Note

Using the cable in extreme temperatures, when it is exposed to certain chemicals and above the nominal cycle speed or below the nominal bending radius of the cable can reduce the flexural strength.

- We reserve the right to make technical modifications without prior notice.