


LED-signaallamp


Signaallamp

K50LMXXPQ

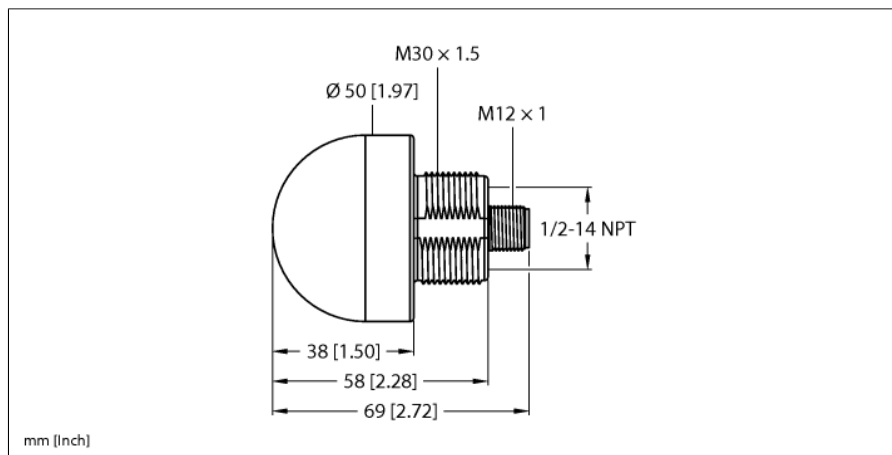

- rondom zichtbare LED-lamp
- apart aanstuurbaar
- mechanische schroefdraad M30x1,5
- beschermingsgraad IP67/IP69K
- monochroom: Magenta (COL 1)
- connector M12x1
- bedrijfsspanning 18...30 VDC

Aansluitschema

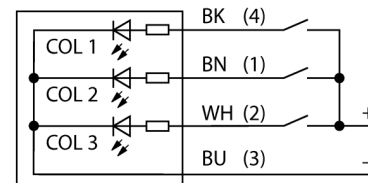

Type	K50LMXXPQ
Identnr.	3025843
Signaal- en weergavegegevens	
Toepassingsdoel	LED-lamp
Functie	Spot-licht
Lichtsoort	Magenta
LED-levensduur (L70)	50000 h
Dimbaar	Nee
Kenmerken kleur 1	Magenta, Doorlopend aan
Bijzondere kenmerken	Wash down
Elektrische gegevens	
Bedrijfsspanning U _s	18...30 VDC
DC nominale bedrijfsstroom I _s	≤ 40 mA
Max. stroomverbruik per kleur	40 mA
Uitgangsfunctie	N.O.-contact, potentiaalvrij
Ingangstype	PNP
Aansprektijd typisch	< 1 ms
Mechanische gegevens	
In cascade monteerbaar	Nee
Bouwworm	Hemisfeer, K50L
Afmetingen	Ø 50 x 69 mm
Materiaal behuizing	Kunststof, PC, zwart
Window material	Polycarbonaat, diffuus
Elektrische aansluiting	Connector, M12 x 1, PVC
Aantal aders	4
Omgevingstemperatuur	-40...+50 °C
Relatieve luchtvochtigheid	0...90%
Beschermingsgraad	IP67 IP69
Tests/certificaten	
MTTF	249 Jaren volgens SN 29500 (Ed. 99) 40 °C
Certificaten	CE, UL gelisted

Toebehoren

Type	Ident no.		Afmetingen
SMB30A	3032723	montagebeugel, haaks, roestvast staal, voor sensoren met 30mm schroefdraad	 Technical drawing of the SMB30A mounting bracket. It is an L-shaped bracket made of stainless steel. Dimensions include: top horizontal arm width 45, vertical arm height 38.5, total height 61, bottom horizontal arm width 69, and a 7.5 offset. A hole with diameter 30.5 is on the top arm, and a hole with diameter 6.3 is on the vertical arm. A 6.3 width is also indicated for the top arm.
SMB30SC	3052521	montagebeugel, PBT-zwart, voor sensoren met 30 mm schroefdraad, oriënteerbaar	 Technical drawing of the SMB30SC mounting bracket. It is a rectangular bracket made of black PBT. Dimensions include: top width 66.5, total height 58.7, bottom width 29, and a 50.8 offset. A hole with diameter 30 is on the top, and a hole with diameter 7 is on the bottom. A 12.7 offset and a 1.5 M30 x 1.5 thread are also indicated.