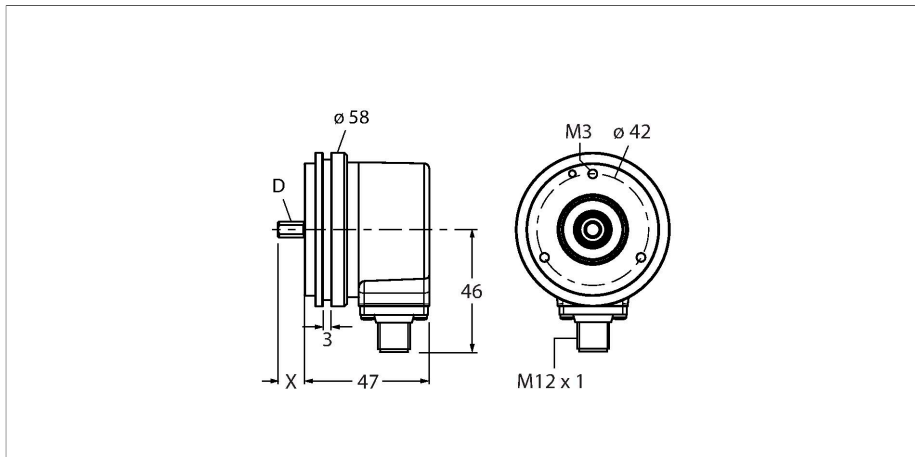


REI-10S6S-4B3600-H1181

Incremental Encoder

Industrial Line


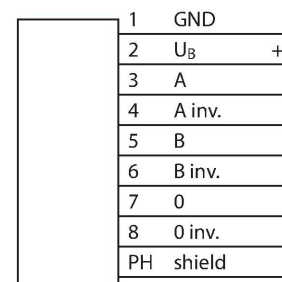


Technical data

Type	REI-10S6S-4B3600-H1181
ID	100010336
Measuring principle	Optical
General data	
Max. rotational speed	6000 rpm
Moment of inertia of the rotor	$1.8 \times 10^{-5} \text{ kgm}^2$
Starting torque	< 0.05 Nm
Output type	Incremental
Resolution incremental	3600 ppr
Electrical data	
Operating voltage U_B	5...30 VDC
No-load current	$\leq 90 \text{ mA}$
Output current	$\leq 20 \text{ mA}$
Short-circuit protection	yes
Wire break/reverse polarity protection	yes
Pulse frequency max.	300 kHz
Signal level high	min. 2.5 V
Signal level low	max. 0.5 V
Output function	RS422/TTL, invertable
Mechanical data	
Flange type	Synchro flange
Flange diameter	$\text{Ø } 58 \text{ mm}$
Shaft Type	Solid shaft
Shaft diameter D (mm)	6
Shaft Length L [mm]	10
Shaft material	Stainless steel

Features

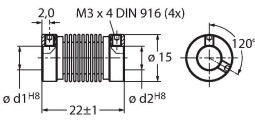
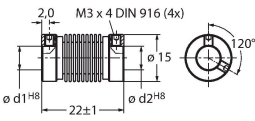








- Synchro flange, $\text{Ø } 58 \text{ mm}$
- Solid shaft, $\text{Ø } 6 \text{ mm} \times 10 \text{ mm}$
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP67 on housing and shaft side
- $-40 \dots +85 \text{ °C}$
- Max. 6000 rpm (continuous operation 3000 rpm)
- 5...30 VDC
- RS422/TTL invertible
- Pulse frequency max. 300 kHz
- M12 x 1 male connector, 8-pin
- 3600 pulses per revolution



Technical data

Housing material	Die-cast zinc
Electrical connection	Connector, M12 × 1
	8-pin
Axial shaft load	40 N
Radial shaft load	80 N
Environmental conditions	
Ambient temperature	-40...+85 °C
Vibration resistance (EN 60068-2-6)	300 m/s ² , 10...2000 Hz
Shock resistance (EN 60068-2-27)	3000 m/s ² , 6 ms
Protection class	IP67
Protection class shaft	IP67

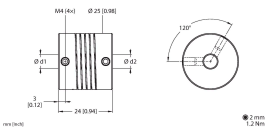
Accessories

RCS-15-08-06	1545361	Bellows coupling, outer diameter: 15 mm, bore diameter: 8 mm/6 mm	RCS-15-06-04	1545363	Bellows coupling, outer diameter: 15 mm, bore diameter: 6 mm/4 mm
					
RA-BC-20-06-06	100048777	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 6 mm	RA-BC-20-06-08	100048778	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 8 mm
					
RA-BC-20-06-10	100048779	Bellows coupling with aluminum hub Ø 20 mm; d1 = 6 mm, d2 = 10 mm	RA-BC-E-20-06-06	100048785	Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 6 mm
					
RA-BC-E-20-06-10	100048786	Stainless steel bellows coupling Ø 20 mm; d1 = 6 mm, d2 = 10 mm	RA-SDC-30-06-10	100048791	Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 10 mm
					
RA-SDC-30-06-06	100048790	Spring disc coupling Ø 30 mm; d1 = 6 mm, d2 = 6 mm	RA-HC-25-06-06	100048794	Aluminum helix coupling Ø 25 mm; d1 = 6 mm, d2 = 6 mm
					

RA-HC-25-06-10

100048795

Aluminum helix coupling \varnothing 25 mm; d1 = 6 mm, d2 = 10 mm



Accessories

Dimension drawing	Type	ID	
	RKC8T-2/TXL	6625142	Connection cable, M12 female connector, straight, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval
	WKC8T-2/TXL	6625145	Connection cable, M12 female connector, angled, 8-pin, cable length: 2 m, jacket material: PUR, black; cULus approval